



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECint®2006 = 11.1**

### IBM System x3655 (AMD Opteron 2344 HE)

**SPECint\_base2006 = 9.37**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Aug-2008

Software Availability: Jun-2008

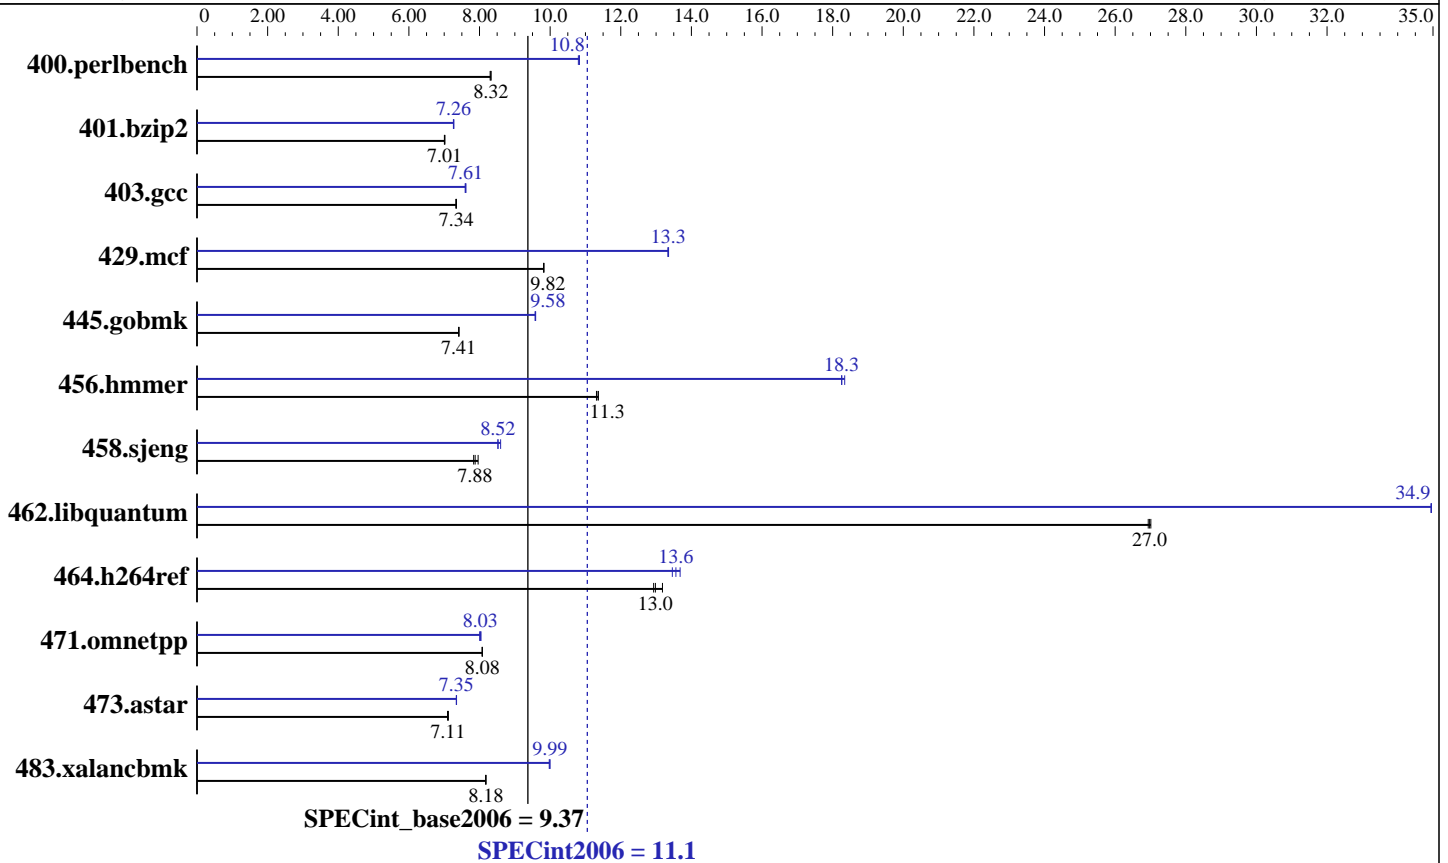

### Hardware

CPU Name: AMD Opteron 2344 HE  
 CPU Characteristics:  
 CPU MHz: 1700  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (8x2 GB, DDR2-667 CL5 Reg Dual Rank)  
 Disk Subsystem: 1 x 73.4 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 11.1

IBM System x3655 (AMD Opteron 2344 HE)

SPECint\_base2006 = 9.37

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Aug-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	1177	8.30	<b>1174</b>	<b>8.32</b>	1173	8.33	<b>902</b>	<b>10.8</b>	902	10.8	905	10.8
401.bzip2	1378	7.01	1375	7.02	<b>1376</b>	<b>7.01</b>	1329	7.26	1327	7.27	<b>1328</b>	<b>7.26</b>
403.gcc	1096	7.35	<b>1097</b>	<b>7.34</b>	1098	7.33	<b>1058</b>	<b>7.61</b>	1057	7.62	1060	7.59
429.mcf	928	9.82	929	9.82	<b>929</b>	<b>9.82</b>	<b>684</b>	<b>13.3</b>	683	13.4	684	13.3
445.gobmk	1416	7.41	1414	7.42	<b>1415</b>	<b>7.41</b>	1095	9.58	1094	9.59	<b>1095</b>	<b>9.58</b>
456.hammer	<b>824</b>	<b>11.3</b>	825	11.3	821	11.4	<b>511</b>	<b>18.3</b>	509	18.3	511	18.3
458.sjeng	1520	7.96	1544	7.83	<b>1536</b>	<b>7.88</b>	<b>1419</b>	<b>8.52</b>	1407	8.60	1420	8.52
462.libquantum	<b>768</b>	<b>27.0</b>	767	27.0	769	26.9	<b>593</b>	<b>34.9</b>	593	35.0	593	34.9
464.h264ref	1711	12.9	1679	13.2	<b>1705</b>	<b>13.0</b>	1618	13.7	1644	13.5	<b>1632</b>	<b>13.6</b>
471.omnetpp	774	8.08	<b>774</b>	<b>8.08</b>	774	8.08	<b>779</b>	<b>8.03</b>	777	8.04	781	8.00
473.astar	<b>987</b>	<b>7.11</b>	986	7.12	990	7.09	<b>955</b>	<b>7.35</b>	955	7.35	956	7.34
483.xalancbmk	844	8.17	843	8.18	<b>843</b>	<b>8.18</b>	692	9.97	<b>691</b>	<b>9.99</b>	690	9.99

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 896
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Set vm/nr_hugepages=1792 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
powersave -f was used to set the CPU frequency to its maximum.
```

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 11.1

IBM System x3655 (AMD Opteron 2344 HE)

SPECint\_base2006 = 9.37

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Aug-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

## Base Portability Flags (Continued)

456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge:150 -Mfprelaxed --zc\_eh -Mipa=fast  
-Mipa=inline -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

464.h264ref: pathcc

C++ benchmarks (except as noted below):

pathCC

473.astar: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 11.1

IBM System x3655 (AMD Opteron 2344 HE)

SPECint\_base2006 = 9.37

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Aug-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
 -WOPT:if\_conv=0 -CG:local\_sched\_alg=1

401.bzip2: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2) -fastsse -O4  
 -Msmartalloc=huge:150 -Mprefetch=t0 -Mnounroll  
 -tp barcelona-64 -Bstatic\_pgi

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:Ofast -m32

429.mcf: -fastsse -Msmartalloc=huge:150 -Mipa=fast -Mipa=inline:1  
 -tp barcelona -Bstatic\_pgi

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict  
 -LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge:150  
 -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr  
 -Mipa=arg -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

458.sjeng: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -fastsse  
 -Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64  
 -Bstatic\_pgi

462.libquantum: -fastsse -Munroll=m:8 -Msmartalloc=huge:150  
 -Mprefetch=distance:4 -Mfprelaxed -Mipa=fast -Mipa=inline  
 -Mipa=noarg -tp barcelona-64 -Bstatic\_pgi

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
 -CG:push\_pop\_int\_saved\_regs=off

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 11.1

IBM System x3655 (AMD Opteron 2344 HE)

SPECint\_base2006 = 9.37

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Aug-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on  
-OPT:alias=disjoint -WOPT:if\_conv=0 -m32 -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge:150  
-Msafeptr=global -Mfprelaxed --zc\_eh -tp barcelona  
-Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -OPT:unroll\_times\_max=8  
-CG:push\_pop\_int\_saved\_regs=off -CG:ptr\_load\_use=0 -m32  
-lsmarheap

## Peak Other Flags

C benchmarks:

429.mcf: -Mipa=jobs:4

456.hmmer: -Mipa=jobs:4

458.sjeng: -Mipa=jobs:4(pass 2)

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):

-L/root/work/cpu2006-amd421gh/amd421gh.libs/32

473.astar: -Mipa=jobs:4(pass 2)

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.00.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 11.1

IBM System x3655 (AMD Opteron 2344 HE)

SPECint\_base2006 = 9.37

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Aug-2008

Software Availability: Jun-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 18:56:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 August 2008.