



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

## SPECint®\_rate2006 = Not Run

## IBM System x3500 (Intel Xeon X5470)

## SPECint\_rate\_base2006 = 138

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

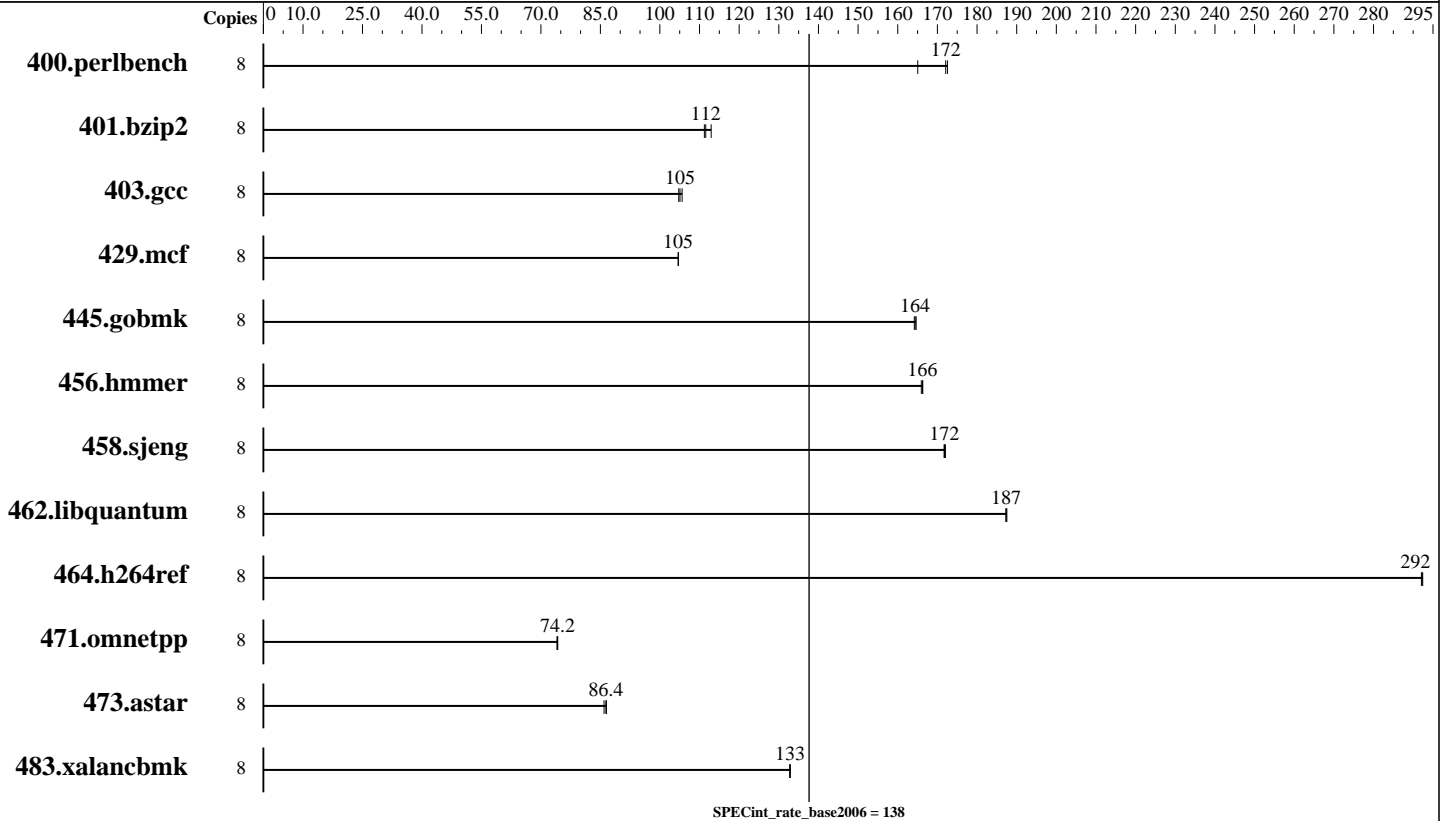

### Hardware

CPU Name: Intel Xeon X5470  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)  
 Disk Subsystem: 1 x 80 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: Not Applicable  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = Not Run

IBM System x3500 (Intel Xeon X5470)

SPECint\_rate\_base2006 = 138

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	474	165	453	173	<b>454</b>	<b>172</b>							
401.bzip2	8	694	111	<b>692</b>	<b>112</b>	684	113							
403.gcc	8	610	106	<b>613</b>	<b>105</b>	615	105							
429.mcf	8	697	105	697	105	<b>697</b>	<b>105</b>							
445.gobmk	8	511	164	<b>510</b>	<b>164</b>	510	165							
456.hammer	8	449	166	450	166	<b>449</b>	<b>166</b>							
458.sjeng	8	564	172	<b>563</b>	<b>172</b>	563	172							
462.libquantum	8	885	187	884	188	<b>885</b>	<b>187</b>							
464.h264ref	8	<b>606</b>	<b>292</b>	606	292	605	292							
471.omnetpp	8	675	74.0	<b>674</b>	<b>74.2</b>	674	74.2							
473.astar	8	<b>650</b>	<b>86.4</b>	649	86.5	654	85.9							
483.xalancbmk	8	415	133	416	133	<b>416</b>	<b>133</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind processes to cores

## General Notes

Hardware Prefetch Disabled, Adjacent Sector Prefetch Disabled  
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = Not Run

IBM System x3500 (Intel Xeon X5470)

SPECint\_rate\_base2006 = 138

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

## Base Optimization Flags

C benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.html>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.11.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.11.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:38:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 October 2008.