



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

SPECfp®2006 = 19.5

PowerEdge M905 (AMD Opteron 8374 HE, 2.20 GHz)

SPECfp\_base2006 = 15.6

CPU2006 license: 55


Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Feb-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

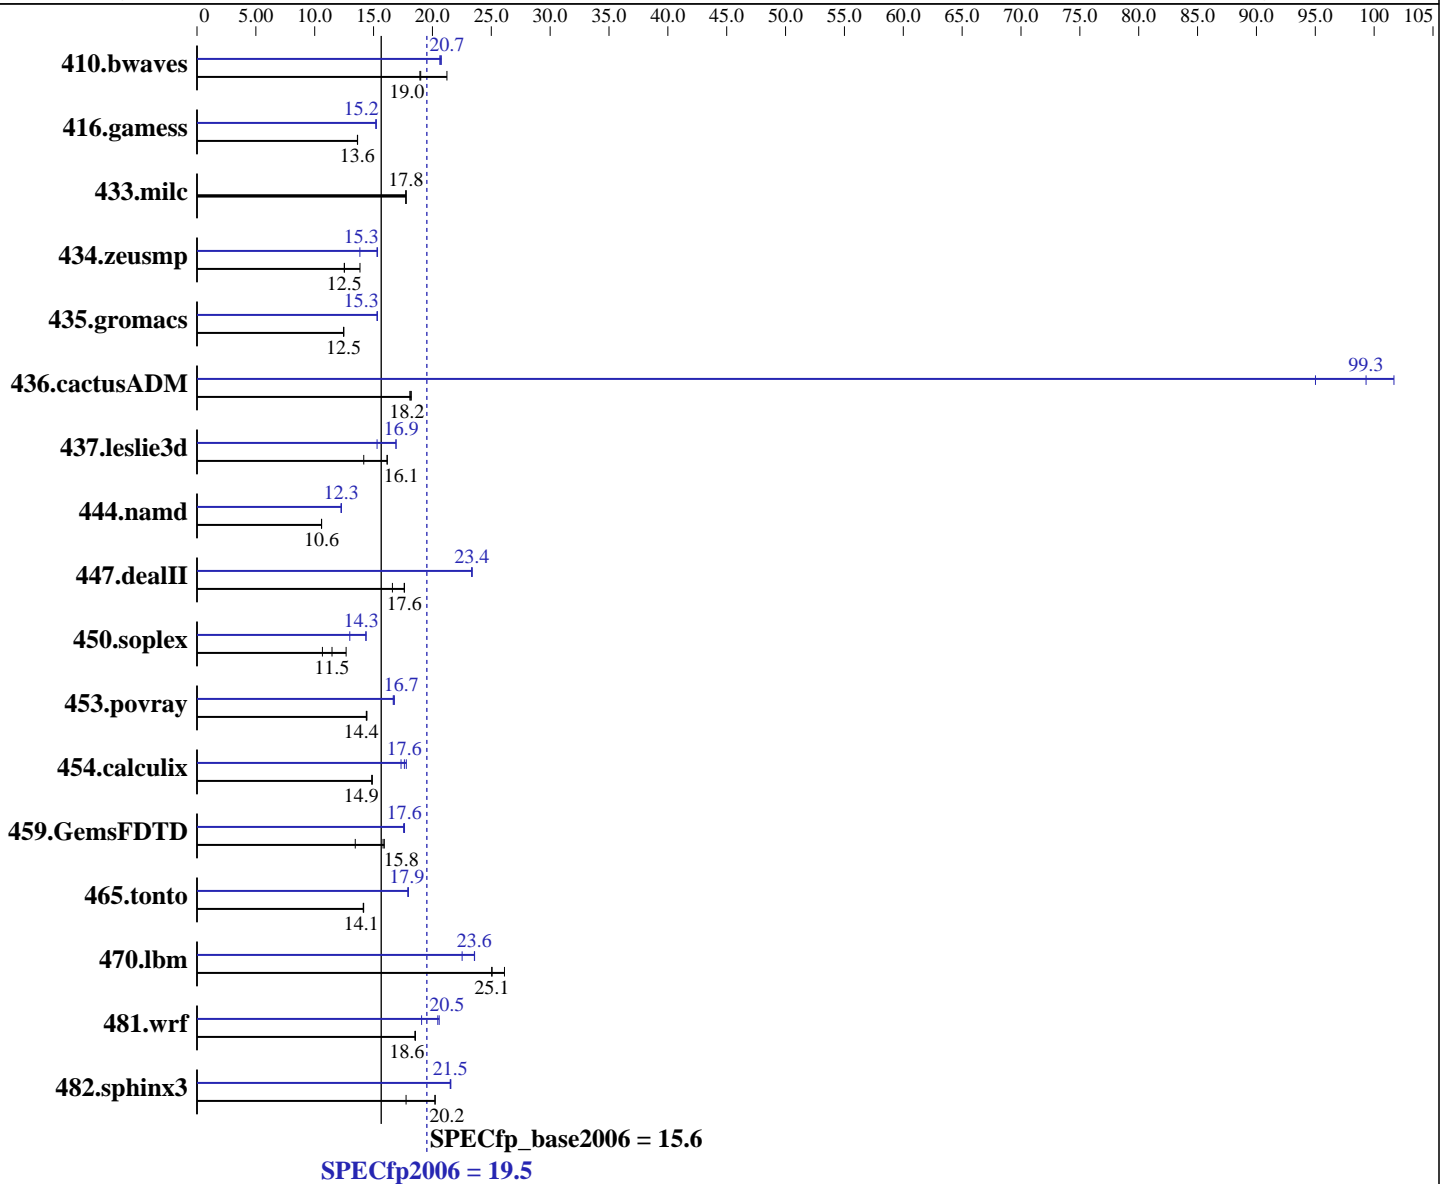

### Hardware

CPU Name: AMD Opteron 8374 HE  
 CPU Characteristics: 2200  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 19.5

PowerEdge M905 (AMD Opteron 8374 HE, 2.20 GHz)

SPECfp\_base2006 = 15.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Feb-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (16 x 4 GB DDR2-800)  
Disk Subsystem: 1 x 73 GB 10000 RPM SAS  
Other Hardware: None

Other Software: binutils 2.18  
32-bit and 64-bit libhugetlbfs libraries

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	640	21.2	<b><u>715</u></b>	<b><u>19.0</u></b>	718	18.9	659	20.6	655	20.8	<b><u>657</u></b>	<b><u>20.7</u></b>
416.gamess	1436	13.6	<b><u>1436</u></b>	<b><u>13.6</u></b>	1435	13.6	<b><u>1287</u></b>	<b><u>15.2</u></b>	1286	15.2	1288	15.2
433.milc	517	17.8	517	17.8	<b><u>517</u></b>	<b><u>17.8</u></b>	517	17.8	517	17.8	<b><u>517</u></b>	<b><u>17.8</u></b>
434.zeusmp	657	13.8	727	12.5	<b><u>727</u></b>	<b><u>12.5</u></b>	593	15.3	658	13.8	<b><u>595</u></b>	<b><u>15.3</u></b>
435.gromacs	<b><u>573</u></b>	<b><u>12.5</u></b>	573	12.5	574	12.4	<b><u>466</u></b>	<b><u>15.3</u></b>	466	15.3	467	15.3
436.cactusADM	<b><u>658</u></b>	<b><u>18.2</u></b>	661	18.1	656	18.2	126	95.0	<b><u>120</u></b>	<b><u>99.3</u></b>	118	102
437.leslie3d	664	14.2	581	16.2	<b><u>582</u></b>	<b><u>16.1</u></b>	<b><u>556</u></b>	<b><u>16.9</u></b>	614	15.3	556	16.9
444.namd	758	10.6	758	10.6	<b><u>758</u></b>	<b><u>10.6</u></b>	654	12.3	<b><u>654</u></b>	<b><u>12.3</u></b>	654	12.3
447.dealII	649	17.6	689	16.6	<b><u>650</u></b>	<b><u>17.6</u></b>	490	23.3	<b><u>490</u></b>	<b><u>23.4</u></b>	489	23.4
450.soplex	<b><u>727</u></b>	<b><u>11.5</u></b>	658	12.7	783	10.7	643	13.0	580	14.4	<b><u>582</u></b>	<b><u>14.3</u></b>
453.povray	369	14.4	<b><u>369</u></b>	<b><u>14.4</u></b>	370	14.4	<b><u>318</u></b>	<b><u>16.7</u></b>	317	16.8	319	16.7
454.calculix	555	14.9	<b><u>555</u></b>	<b><u>14.9</u></b>	554	14.9	<b><u>468</u></b>	<b><u>17.6</u></b>	476	17.3	464	17.8
459.GemsFDTD	<b><u>671</u></b>	<b><u>15.8</u></b>	789	13.4	667	15.9	605	17.6	602	17.6	<b><u>602</u></b>	<b><u>17.6</u></b>
465.tonto	<b><u>696</u></b>	<b><u>14.1</u></b>	695	14.2	696	14.1	<b><u>549</u></b>	<b><u>17.9</u></b>	548	18.0	549	17.9
470.lbm	549	25.0	<b><u>548</u></b>	<b><u>25.1</u></b>	526	26.1	583	23.6	610	22.5	<b><u>583</u></b>	<b><u>23.6</u></b>
481.wrf	602	18.6	<b><u>602</u></b>	<b><u>18.6</u></b>	604	18.5	543	20.6	585	19.1	<b><u>546</u></b>	<b><u>20.5</u></b>
482.sphinx3	1097	17.8	<b><u>965</u></b>	<b><u>20.2</u></b>	963	20.2	<b><u>905</u></b>	<b><u>21.5</u></b>	906	21.5	904	21.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores

## Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 19.5

PowerEdge M905 (AMD Opteron 8374 HE, 2.20 GHz)

SPECfp\_base2006 = 15.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Feb-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_MORECORE = "yes"

LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"

NCPUS = "8"

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deall: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 19.5

PowerEdge M905 (AMD Opteron 8374 HE, 2.20 GHz)

SPECfp\_base2006 = 15.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Feb-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

## Base Optimization Flags (Continued)

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 19.5

PowerEdge M905 (AMD Opteron 8374 HE, 2.20 GHz)

SPECfp\_base2006 = 15.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Feb-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge  
-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse  
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepch  
-Mfprelaxed --zc\_eh -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 19.5

PowerEdge M905 (AMD Opteron 8374 HE, 2.20 GHz)

SPECfp\_base2006 = 15.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Feb-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Optimization Flags (Continued)

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-fno-exceptions -m32

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3  
-INLINE:aggressive=on -OPT:IEEE\_arith=3  
-OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on  
-OPT:malloc\_alg=1 -CG:load\_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

### Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc  
-Mprefetch=nta -Mfpelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfpelaxed  
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge  
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse  
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0  
-Mfpelaxed -tp barcelona-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:prefer\_lru\_reg=off  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

### Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 19.5

PowerEdge M905 (AMD Opteron 8374 HE, 2.20 GHz)

SPECfp\_base2006 = 15.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Feb-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur  
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge  
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64  
-Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-OPT:malloc\_alg=1 -m3dnow  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

## Peak Other Flags

C benchmarks:  
-Mipa=jobs:4(pass 2)

C++ benchmarks:  
444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):  
-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):  
-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 19.5

PowerEdge M905 (AMD Opteron 8374 HE, 2.20 GHz)

SPECfp\_base2006 = 15.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Feb-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.20090713.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.html)  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.20090713.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.xml)  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 23:02:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 March 2009.