



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-3012MA-H12TRF (H8SME-F,
Opteron 3320 EE)
AMD Opteron 3320 EE

SPECint[®]_rate2006 = 57.3

SPECint_rate_base2006 = 51.0

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2013

Hardware Availability: Nov-2011

Software Availability: Aug-2012

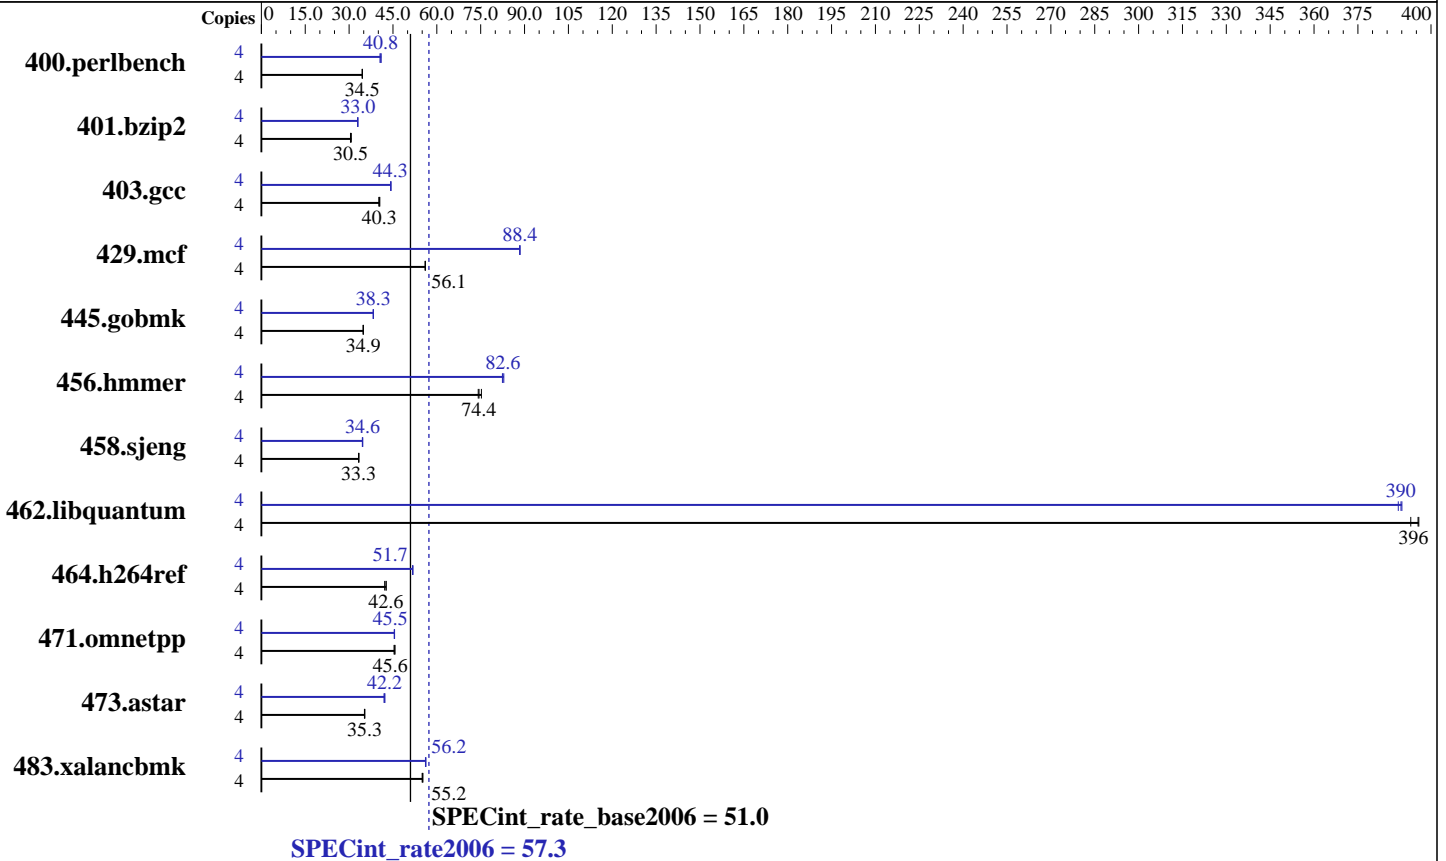

Hardware

CPU Name: AMD Opteron 3320 EE
 CPU Characteristics: AMD Turbo CORE technology up to 2.50 GHz
 CPU MHz: 1900
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 128 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (4 x 8 GB 2Rx4 PC3-10600U-9, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2,
Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite
(from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-3012MA-H12TRF (H8SME-F,
Opteron 3320 EE)
AMD Opteron 3320 EE

SPECint_rate2006 = 57.3

SPECint_rate_base2006 = 51.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2013

Hardware Availability: Nov-2011

Software Availability: Aug-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	1134	34.5	1130	34.6	<u>1131</u>	<u>34.5</u>	4	963	40.6	<u>958</u>	<u>40.8</u>	954	41.0
401.bzip2	4	1267	30.5	1255	30.8	<u>1266</u>	<u>30.5</u>	4	1173	32.9	<u>1170</u>	<u>33.0</u>	1170	33.0
403.gcc	4	795	40.5	802	40.2	<u>798</u>	<u>40.3</u>	4	<u>728</u>	<u>44.3</u>	727	44.3	728	44.2
429.mcf	4	651	56.0	<u>651</u>	<u>56.1</u>	650	56.1	4	<u>413</u>	<u>88.4</u>	412	88.4	413	88.3
445.gobmk	4	1204	34.9	<u>1204</u>	<u>34.9</u>	1205	34.8	4	1096	38.3	1096	38.3	<u>1096</u>	<u>38.3</u>
456.hammer	4	503	74.2	496	75.3	<u>501</u>	<u>74.4</u>	4	<u>452</u>	<u>82.6</u>	453	82.4	450	82.9
458.sjeng	4	1452	33.3	<u>1454</u>	<u>33.3</u>	1455	33.3	4	<u>1399</u>	<u>34.6</u>	1396	34.7	1402	34.5
462.libquantum	4	209	396	211	393	<u>210</u>	<u>396</u>	4	213	389	212	390	<u>213</u>	<u>390</u>
464.h264ref	4	2074	42.7	<u>2077</u>	<u>42.6</u>	2100	42.2	4	1707	51.9	1713	51.7	<u>1711</u>	<u>51.7</u>
471.omnetpp	4	<u>548</u>	<u>45.6</u>	551	45.4	547	45.7	4	550	45.4	<u>549</u>	<u>45.5</u>	549	45.6
473.astar	4	797	35.2	794	35.4	<u>795</u>	<u>35.3</u>	4	<u>666</u>	<u>42.2</u>	665	42.2	670	41.9
483.xalancbmk	4	502	55.0	500	55.2	<u>500</u>	<u>55.2</u>	4	492	56.1	491	56.2	<u>491</u>	<u>56.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=3584 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-3012MA-H12TRF (H8SME-F,
Opteron 3320 EE)
AMD Opteron 3320 EE

SPECint_rate2006 = 57.3

SPECint_rate_base2006 = 51.0

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Feb-2013
Hardware Availability: Nov-2011
Software Availability: Aug-2012

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-3012MA-H12TRF (H8SME-F,
Opteron 3320 EE)
AMD Opteron 3320 EE

SPECint_rate2006 = 57.3

SPECint_rate_base2006 = 51.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2013

Hardware Availability: Nov-2011

Software Availability: Aug-2012

Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
               -LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
               -GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
           -LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
           -OPT:goto=off -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
           -march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
         -LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
         -m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
         -WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
         -CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
         -m32 -HP:bd=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
           -OPT:unroll_size=256 -OPT:unroll_times_max=8
           -OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
           -IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
           -HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
           -LNO:prefetch=2 -OPT:alias=disjoint
           -OPT:unroll_times_max=16 -OPT:unroll_size=512
           -OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
           -CG:cmp_peep=on -CG:pre_local_sched=off -HP:bd=2m:heap=2m
           -CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-3012MA-H12TRF (H8SME-F,
Opteron 3320 EE)
AMD Opteron 3320 EE

SPECint_rate2006 = 57.3

SPECint_rate_base2006 = 51.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2013

Hardware Availability: Nov-2011

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off
-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: -Ofast -mso -OPT:unroll_size=512 -OPT:unroll_times_max=16
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -LNO:pf2=0
-CG:local_sched_alg=1 -CG:p2align=0 -INLINE:aggressive=ON
-IPA:plimit=15000 -IPA:small_pu=100
-HP:bd=2m:heap=2m,limit=300 -march=bdver2

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:unroll_size=256 -OPT:unroll_times_max=2
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bd=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-WOPT:sib=on -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bd=2m:heap=2m
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2
-mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-3012MA-H12TRF (H8SME-F,
Opteron 3320 EE)
AMD Opteron 3320 EE

SPECint_rate2006 = 57.3

SPECint_rate_base2006 = 51.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2013

Hardware Availability: Nov-2011

Software Availability: Aug-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:36:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 May 2013.