



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3630 M4
(Intel Xeon E5-2403 v2, 1.80 GHz)

SPECint®_rate2006 = 184

SPECint_rate_base2006 = 178

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

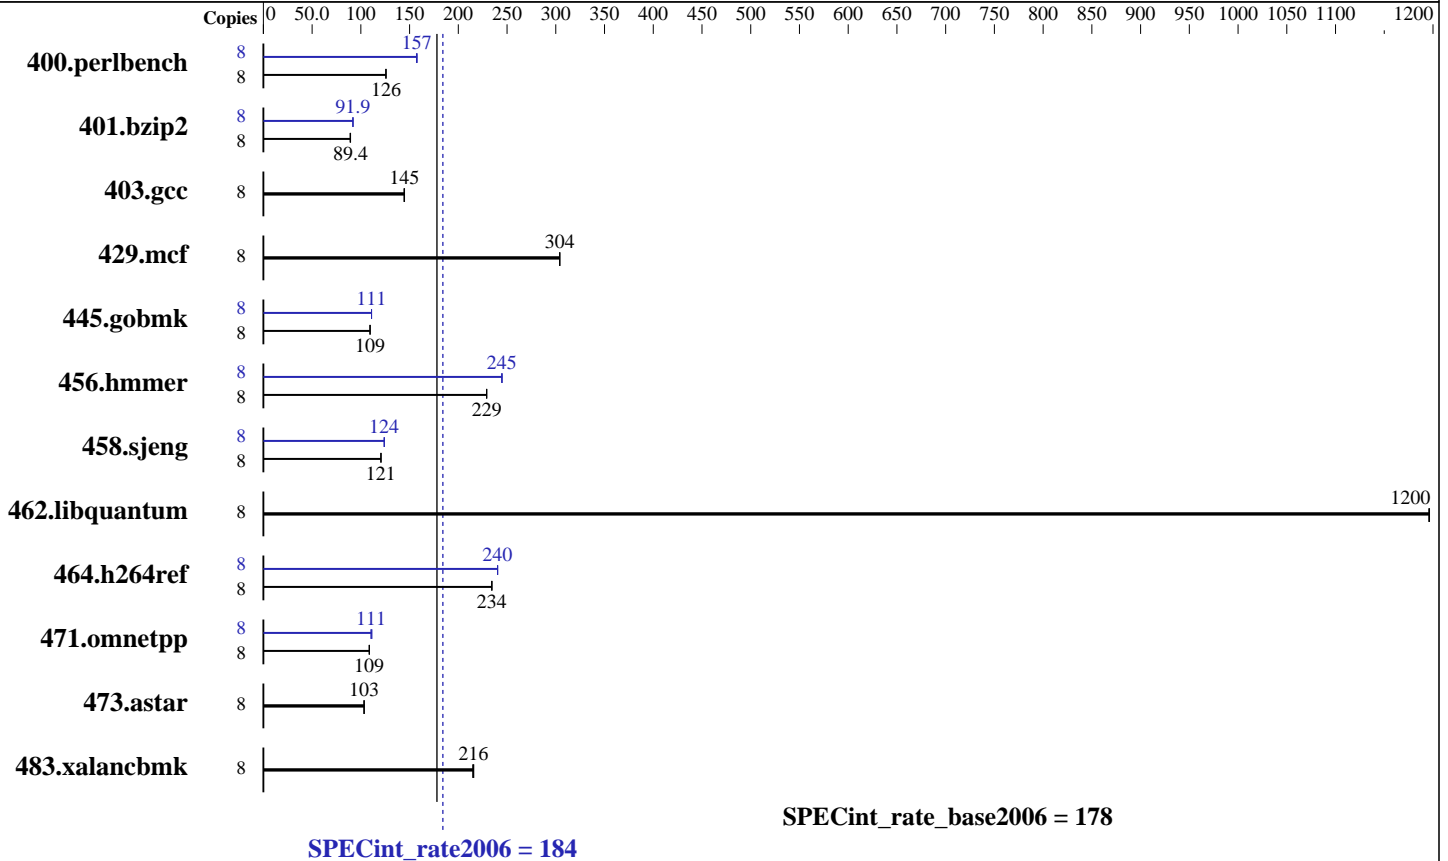

Hardware

CPU Name: Intel Xeon E5-2403 v2
 CPU Characteristics: 1800
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 192 GB (12 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
 Disk Subsystem: 1 x 2 TB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3630 M4
(Intel Xeon E5-2403 v2, 1.80 GHz)

SPECint_rate2006 = 184

SPECint_rate_base2006 = 178

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	621	126	622	126	621	126	8	497	157	498	157	495	158
401.bzip2	8	863	89.4	863	89.4	868	88.9	8	840	91.9	841	91.8	839	92.0
403.gcc	8	445	145	445	145	446	144	8	445	145	445	145	446	144
429.mcf	8	240	304	240	304	240	304	8	240	304	240	304	240	304
445.gobmk	8	767	109	766	109	766	110	8	756	111	756	111	756	111
456.hammer	8	326	229	326	229	326	229	8	305	245	305	245	305	245
458.sjeng	8	802	121	803	121	802	121	8	781	124	780	124	780	124
462.libquantum	8	139	1200	139	1200	139	1200	8	139	1200	139	1200	139	1200
464.h264ref	8	755	234	756	234	755	234	8	737	240	737	240	737	240
471.omnetpp	8	460	109	460	109	460	109	8	453	110	449	111	452	111
473.astar	8	543	104	544	103	544	103	8	543	104	544	103	544	103
483.xalancbmk	8	257	215	256	216	256	216	8	257	215	256	216	256	216

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0

Platform Notes

BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on x3630M4 Sat May 31 03:46:30 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2403 v2 @ 1.80GHz
2 "physical id"s (chips)

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 184

IBM System x3630 M4
(Intel Xeon E5-2403 v2, 1.80 GHz)

SPECint_rate_base2006 = 178

CPU2006 license: 11

Test date: May-2014

Test sponsor: IBM Corporation

Hardware Availability: Mar-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

Platform Notes (Continued)

```

8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 10240 KB

From /proc/meminfo
MemTotal:      198464900 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux x3630M4 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 29 12:04

SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem                Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3630m4-lv_home ext4    1.8T   11G  1.7T   1% /home

Additional information from dmidecode:
BIOS IBM  -[BEE135VUS-1.60]- 01/14/2014
Memory:
 12x Samsung M393B2G70QH0-YK0 16 GB 1333 MHz 2 rank

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3630 M4
(Intel Xeon E5-2403 v2, 1.80 GHz)

SPECint_rate2006 = 184

SPECint_rate_base2006 = 178

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

General Notes (Continued)

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3630 M4
(Intel Xeon E5-2403 v2, 1.80 GHz)

SPECint_rate2006 = 184

SPECint_rate_base2006 = 178

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3630 M4
(Intel Xeon E5-2403 v2, 1.80 GHz)

SPECint_rate2006 = 184

SPECint_rate_base2006 = 178

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:13:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 July 2014.