



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

**SPECfp®\_rate2006 = 774**

Huawei XH628 V3 (Intel Xeon E5-2670 v3)

**SPECfp\_rate\_base2006 = 754**

CPU2006 license: 3175


Test date: Feb-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

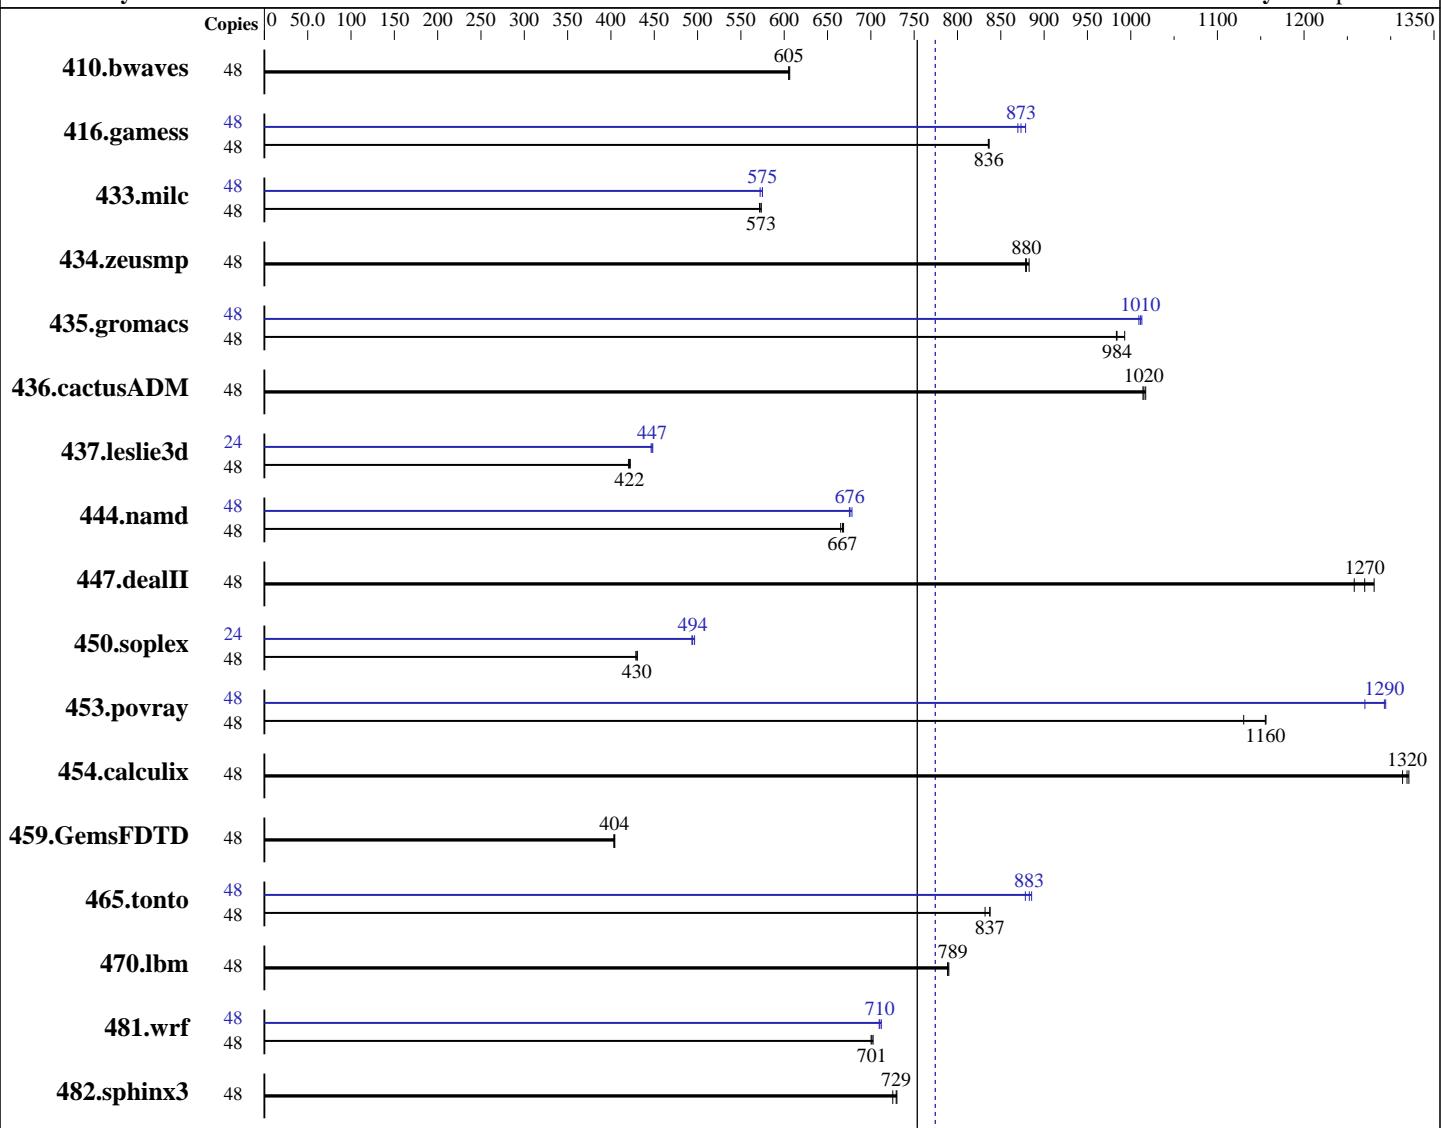

**SPECfp\_rate\_base2006 = 754**

**SPECfp\_rate2006 = 774**

## Hardware

CPU Name: Intel Xeon E5-2670 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Compiler: 3.10.0-123.el7.x86\_64  
 C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 774**

Huawei XH628 V3 (Intel Xeon E5-2670 v3)

**SPECfp\_rate\_base2006 = 754**

CPU2006 license: 3175

Test date: Feb-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1078	605	<b>1077</b>	<b>605</b>	1076	606	48	1078	605	<b>1077</b>	<b>605</b>	1076	606
416.gamess	48	<b>1124</b>	<b>836</b>	1125	836	1124	836	48	1070	879	1081	870	<b>1076</b>	<b>873</b>
433.milc	48	771	571	<b>769</b>	<b>573</b>	768	573	48	767	575	<b>767</b>	<b>575</b>	770	572
434.zeusmp	48	495	883	<b>497</b>	<b>880</b>	497	879	48	495	883	<b>497</b>	<b>880</b>	497	879
435.gromacs	48	<b>348</b>	<b>984</b>	348	983	345	993	48	<b>339</b>	<b>1010</b>	340	1010	338	1010
436.cactusADM	48	<b>565</b>	<b>1020</b>	566	1010	564	1020	48	<b>565</b>	<b>1020</b>	566	1010	564	1020
437.leslie3d	48	1068	422	<b>1070</b>	<b>422</b>	1074	420	24	505	446	<b>504</b>	<b>447</b>	503	448
444.namd	48	576	669	<b>577</b>	<b>667</b>	579	665	48	568	678	570	675	<b>570</b>	<b>676</b>
447.dealII	48	429	1280	437	1260	<b>432</b>	<b>1270</b>	48	429	1280	437	1260	<b>432</b>	<b>1270</b>
450.soplex	48	930	431	934	429	<b>931</b>	<b>430</b>	24	406	493	403	497	<b>405</b>	<b>494</b>
453.povray	48	221	1160	226	1130	<b>221</b>	<b>1160</b>	48	<b>198</b>	<b>1290</b>	201	1270	197	1290
454.calculix	48	300	1320	<b>300</b>	<b>1320</b>	301	1310	48	300	1320	<b>300</b>	<b>1320</b>	301	1310
459.GemsFDTD	48	<b>1260</b>	<b>404</b>	1259	404	1263	403	48	<b>1260</b>	<b>404</b>	1259	404	1263	403
465.tonto	48	564	838	568	832	<b>564</b>	<b>837</b>	48	538	878	<b>535</b>	<b>883</b>	533	886
470.lbm	48	835	790	<b>836</b>	<b>789</b>	836	789	48	835	790	<b>836</b>	<b>789</b>	836	789
481.wrf	48	763	703	766	700	<b>765</b>	<b>701</b>	48	756	710	<b>755</b>	<b>710</b>	753	712
482.sphinx3	48	1290	725	1281	730	<b>1283</b>	<b>729</b>	48	1290	725	1281	730	<b>1283</b>	<b>729</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Set Power Efficiency Mode to Performance  
 Set Snoop Mode to COD

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 774

Huawei XH628 V3 (Intel Xeon E5-2670 v3)

SPECfp\_rate\_base2006 = 754

CPU2006 license: 3175

Test date: Feb-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

## Platform Notes (Continued)

```
Sysinfo program /spec15/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$
running on localhost.localdomain Wed Feb 11 14:18:21 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2670 v3 @ 2.30GHz
        2 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings : 12
    physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
    physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
    cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      263575156 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
    redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 11 02:26
```

```
SPEC is set to: /spec15
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root ext4  241G  125G  104G  55% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 774**

Huawei XH628 V3 (Intel Xeon E5-2670 v3)

**SPECfp\_rate\_base2006 = 754**

CPU2006 license: 3175

Test date: Feb-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

## Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 1.20 10/25/2014

Memory:

8x Samsung M393A2G40DB0-CPB 16 GB 1 rank 2133 MHz

8x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec15/libs/32:/spec15/libs/64:/spec15/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Huawei XH622 V3 and Huawei XH628 V3

are electronically equivalent.

The results have been measured on a Huawei XH628 V3 model.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 774**

Huawei XH628 V3 (Intel Xeon E5-2670 v3)

**SPECfp\_rate\_base2006 = 754**

CPU2006 license: 3175

Test date: Feb-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

## Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei XH628 V3 (Intel Xeon E5-2670 v3)

**SPECfp\_rate2006 = 774**

CPU2006 license: 3175

Test date: Feb-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
  -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
  -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 774

Huawei XH628 V3 (Intel Xeon E5-2670 v3)

SPECfp\_rate\_base2006 = 754

CPU2006 license: 3175

Test date: Feb-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

450.soplex (continued):

-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 774**

Huawei XH628 V3 (Intel Xeon E5-2670 v3)

**SPECfp\_rate\_base2006 = 754**

**CPU2006 license:** 3175

**Test date:** Feb-2015

**Test sponsor:** Huawei

**Hardware Availability:** Sep-2014

**Tested by:** Huawei

**Software Availability:** Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 10 16:01:19 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 March 2015.