



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECint®\_rate2006 = 935

SPECint\_rate\_base2006 = 895

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Oct-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

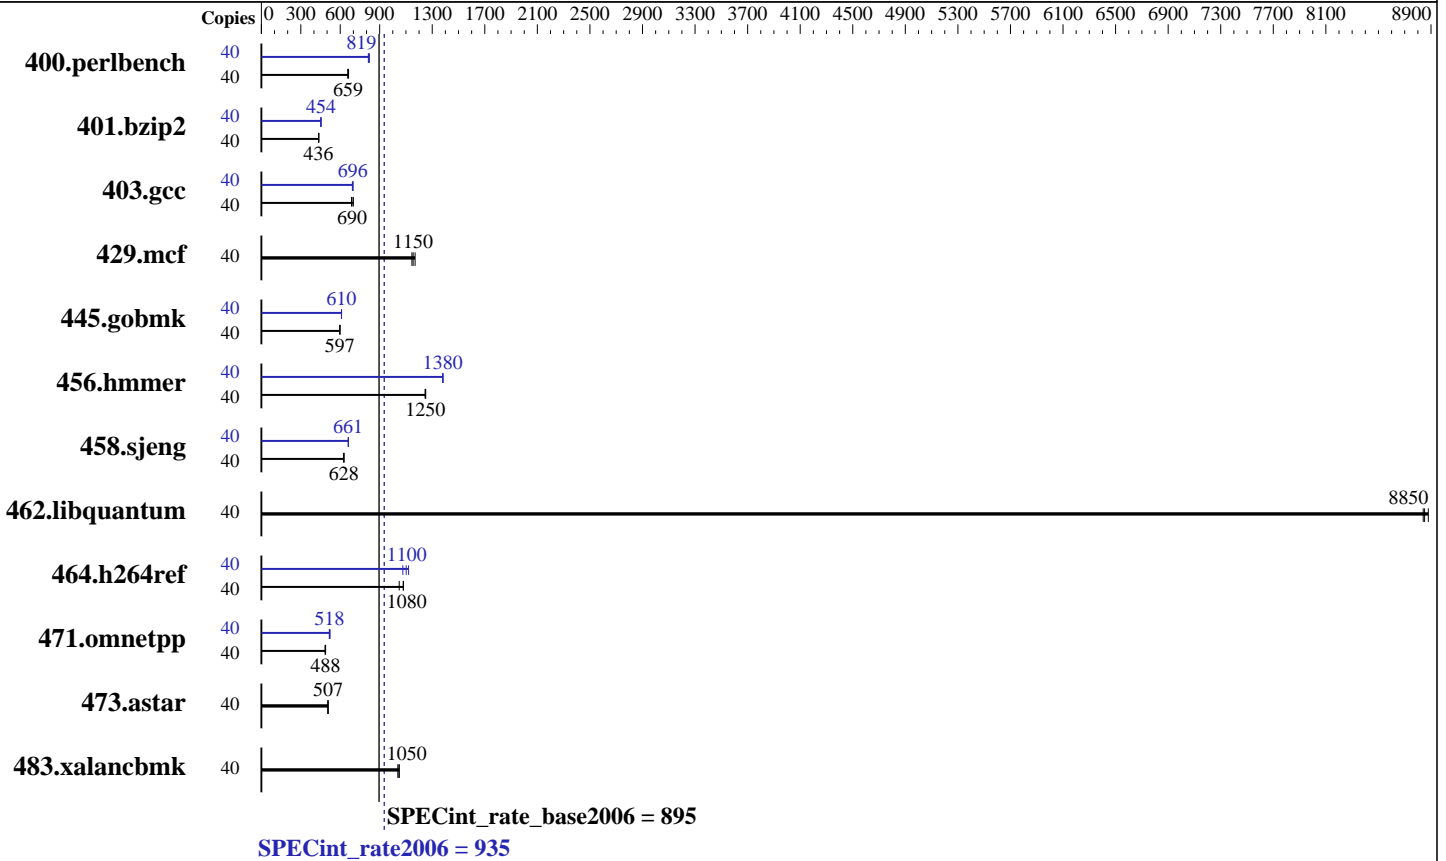

### Hardware

CPU Name: Intel Xeon E5-2660 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 240 GB SATA II SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 3.10.0-229.11.1.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.047 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECint\_rate2006 = 935

SPECint\_rate\_base2006 = 895

CPU2006 license: 9008  
Test sponsor: ACTION S.A.  
Tested by: ACTION S.A.

Test date: Oct-2015  
Hardware Availability: Sep-2014  
Software Availability: Aug-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	589	663	<u>593</u>	<u>659</u>	594	658	40	<u>477</u>	<u>819</u>	476	821	480	814
401.bzip2	40	886	436	882	437	<u>886</u>	<u>436</u>	40	850	454	<u>850</u>	<u>454</u>	855	451
403.gcc	40	<u>467</u>	<u>690</u>	470	686	460	700	40	465	692	462	697	<u>463</u>	<u>696</u>
429.mcf	40	<u>316</u>	<u>1150</u>	318	1150	312	1170	40	<u>316</u>	<u>1150</u>	318	1150	312	1170
445.gobmk	40	702	598	<u>703</u>	<u>597</u>	703	597	40	688	610	<u>688</u>	<u>610</u>	689	609
456.hammer	40	298	1250	<u>299</u>	<u>1250</u>	300	1250	40	<u>270</u>	<u>1380</u>	270	1380	270	1380
458.sjeng	40	771	628	772	627	<u>771</u>	<u>628</u>	40	732	661	<u>732</u>	<u>661</u>	731	662
462.libquantum	40	<u>93.6</u>	<u>8850</u>	93.3	8880	93.7	8840	40	<u>93.6</u>	<u>8850</u>	93.3	8880	93.7	8840
464.h264ref	40	844	1050	819	1080	<u>820</u>	<u>1080</u>	40	822	1080	<u>803</u>	<u>1100</u>	790	1120
471.omnetpp	40	512	488	516	484	<u>512</u>	<u>488</u>	40	483	517	<u>483</u>	<u>518</u>	478	523
473.astar	40	<u>553</u>	<u>507</u>	553	508	555	506	40	<u>553</u>	<u>507</u>	553	508	555	506
483.xalancbmk	40	<u>264</u>	<u>1050</u>	263	1050	266	1040	40	<u>264</u>	<u>1050</u>	263	1050	266	1040

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### Bios Settings:

Intel(R) Hyper-Threading Tech = Enabled  
Power & Performance = Performance  
Enforce POR = Disabled  
Memory Operating Speed Selection = 2133  
Cluster-on-Die = Enabled  
Set Fan Profile = Performance  
Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on SUT Wed Oct 28 09:26:48 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

SPECint\_rate2006 = 935

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECint\_rate\_base2006 = 895

CPU2006 license: 9008

Test date: Oct-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Aug-2015

### Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2660 v3 @ 2.60GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 12800 KB

```

```

From /proc/meminfo
MemTotal:      263872952 kB
HugePages_Total:      1
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
os-release.rpmnew:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

```

```

uname -a:
Linux SUT 3.10.0-229.11.1.el7.x86_64 #5 SMP Mon Sep 14 17:11:19 CEST 2015
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 28 09:26

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  212G  37G  165G  19% /

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECint\_rate2006 = 935**

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

**SPECint\_rate\_base2006 = 895**

**CPU2006 license:** 9008

**Test date:** Oct-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Aug-2015

## Platform Notes (Continued)

Additional information from dmidecode:

BIOS Intel Corporation SE5C610.86B.01.01.0009.060120151350 06/01/2015

Memory:

16x 16 GB

16x Micron 36ASF2G72PZ-2G1A2 16 GB 2134 MHz 2 rank

8x NO DIMM NO DIMM

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 16 GB were used to run the test (256 GB total)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory using RedHat EL 7.1

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECint\_rate2006 = 935**

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

**SPECint\_rate\_base2006 = 895**

**CPU2006 license:** 9008

**Test date:** Oct-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Aug-2015

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmarheap`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32 -L/opt/intel/lib/ia32`

`400.perlbench: icc -m64`

`401.bzip2: icc -m64`

`456.hmmer: icc -m64`

`458.sjeng: icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/lib/ia32`

## Peak Portability Flags

`400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

`401.bzip2: -DSPEC_CPU_LP64`

`456.hmmer: -DSPEC_CPU_LP64`

`458.sjeng: -DSPEC_CPU_LP64`

`462.libquantum: -DSPEC_CPU_LINUX`

`483.xalancbmk: -DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

`400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECint\_rate2006 = 935**

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

**SPECint\_rate\_base2006 = 895**

**CPU2006 license:** 9008

**Test date:** Oct-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Aug-2015

## Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

**SPECint\_rate2006 = 935**

**SPECint\_rate\_base2006 = 895**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Oct-2015

**Hardware Availability:** Sep-2014

**Software Availability:** Aug-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Nov 17 19:15:16 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 November 2015.