



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-4820 v4 2.00 GHz)

SPECfp_®_rate2006 = 1160

SPECfp_rate_base2006 = 1140

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Oct-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

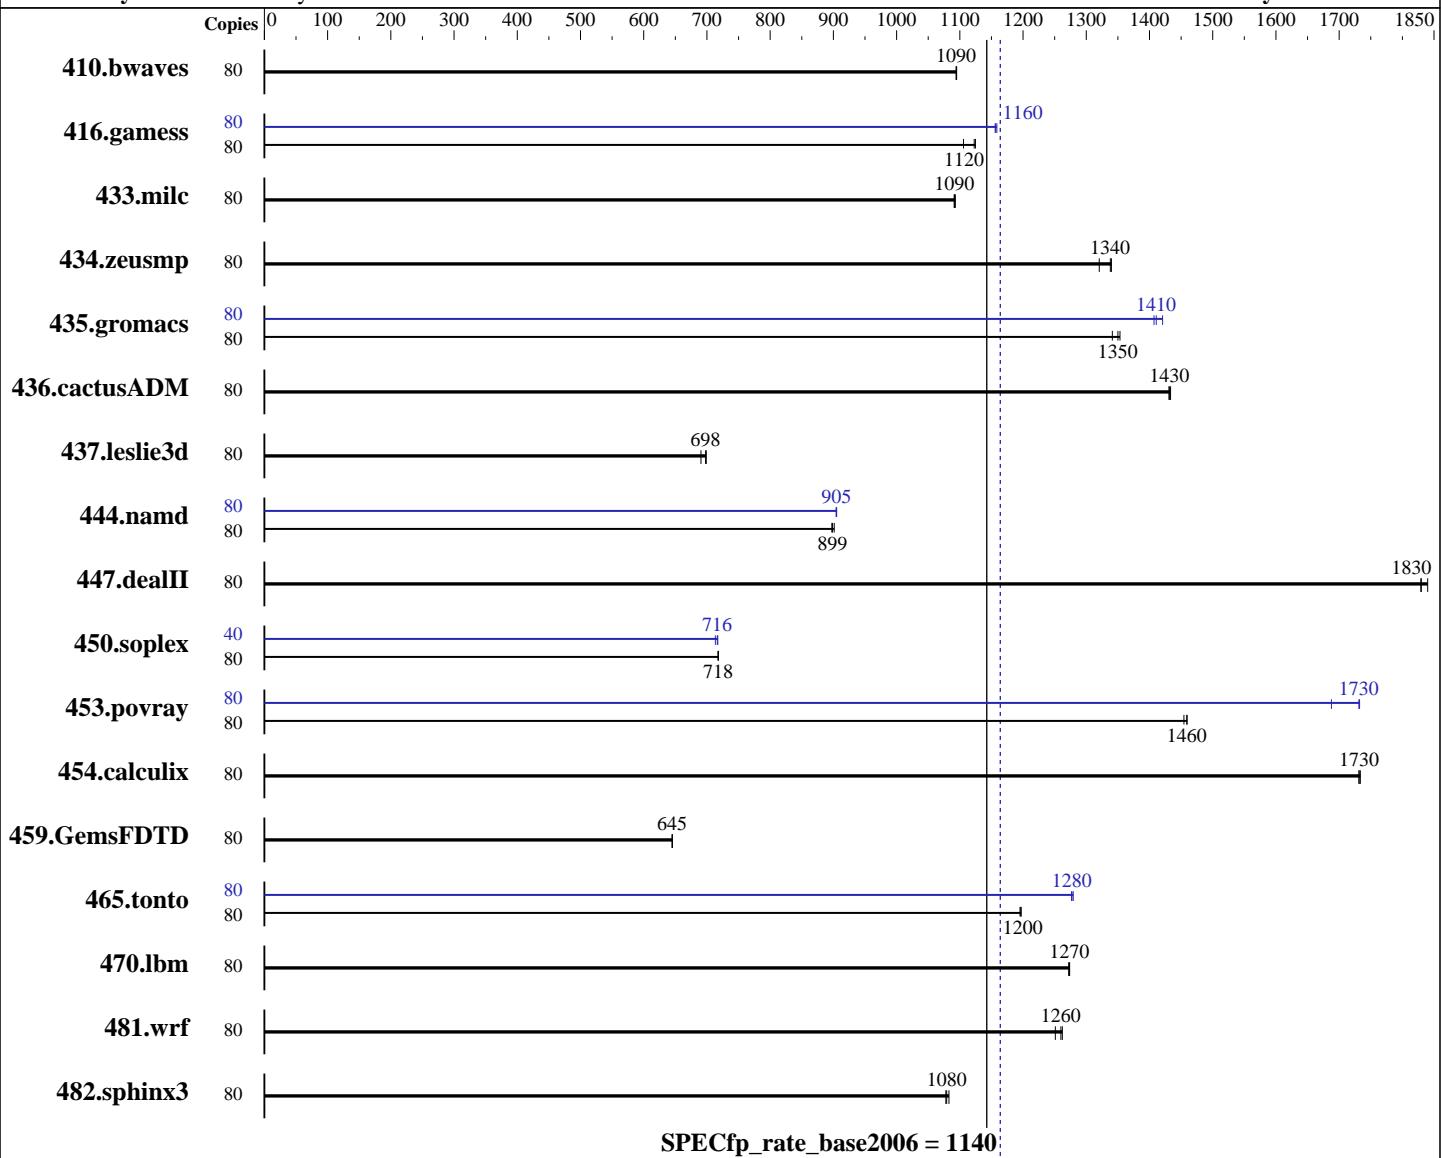

SPECfp_rate_base2006 = 1140

SPECfp_®_rate2006 = 1160

Hardware

CPU Name: Intel Xeon E7-4820 v4
CPU Characteristics:
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64) 3.12.49-11-default
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-4820 v4 2.00 GHz)

SPECfp_rate2006 = 1160

SPECfp_rate_base2006 = 1140

CPU2006 license: 9019

Test date: Oct-2016

Test sponsor: Cisco Systems

Hardware Availability: Jul-2016

Tested by: Cisco Systems

Software Availability: Dec-2015

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R,
 running at 1333 MHz)
 Disk Subsystem: 1 x 400 GB SAS SSD
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	994	1090	993	1090	993	1090	80	994	1090	993	1090	993	1090
416.gamess	80	1393	1120	1417	1110	1395	1120	80	1355	1160	1354	1160	1352	1160
433.milc	80	673	1090	672	1090	673	1090	80	673	1090	672	1090	673	1090
434.zeusmp	80	543	1340	551	1320	544	1340	80	543	1340	551	1320	544	1340
435.gromacs	80	426	1340	423	1350	422	1350	80	405	1410	406	1410	402	1420
436.cactusADM	80	667	1430	668	1430	668	1430	80	667	1430	668	1430	668	1430
437.leslie3d	80	1078	698	1089	691	1076	699	80	1078	698	1089	691	1076	699
444.namd	80	712	901	714	899	715	898	80	709	905	709	904	709	905
447.dealII	80	500	1830	500	1830	497	1840	80	500	1830	500	1830	497	1840
450.soplex	80	929	718	930	718	930	718	40	468	713	466	716	465	717
453.povray	80	293	1450	292	1460	292	1460	80	246	1730	252	1690	246	1730
454.calculix	80	381	1730	381	1730	381	1730	80	381	1730	381	1730	381	1730
459.GemsFDTD	80	1316	645	1315	645	1316	645	80	1316	645	1315	645	1316	645
465.tonto	80	658	1200	658	1200	659	1200	80	617	1280	616	1280	615	1280
470.lbm	80	863	1270	863	1270	864	1270	80	863	1270	863	1270	864	1270
481.wrf	80	709	1260	708	1260	714	1250	80	709	1260	708	1260	714	1250
482.sphinx3	80	1440	1080	1445	1080	1447	1080	80	1440	1080	1445	1080	1447	1080

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-4820 v4 2.00 GHz)

SPECfp_rate2006 = 1160

SPECfp_rate_base2006 = 1140

CPU2006 license: 9019

Test date: Oct-2016

Test sponsor: Cisco Systems

Hardware Availability: Jul-2016

Tested by: Cisco Systems

Software Availability: Dec-2015

Platform Notes

BIOS Settings:

CPU performance set to Enterprise
Power Technology set to Performance
Energy Performance BIAS setting set to Balanced Performance
Memory RAS configuration set to Maximum Performance
Memory Power Saving Mode set to Disabled
QPI Snoop Mode set to Cluster-on-Die
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-69f9 Wed Oct 26 15:04:06 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-4820 v4 @ 2.00GHz
 4 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 10
 siblings : 20
 physical 0: cores 0 1 2 3 4 8 9 10 11 12
 physical 1: cores 0 1 2 3 4 8 9 10 11 12
 physical 2: cores 0 1 2 3 4 8 9 10 11 12
 physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB

From /proc/meminfo
MemTotal: 529297700 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
 SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.
os-release:
 NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-4820 v4 2.00 GHz)

SPECfp_rate2006 = 1160

SPECfp_rate_base2006 = 1140

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Oct-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Platform Notes (Continued)

```
uname -a:  
Linux linux-69f9 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015  
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 26 00:22
```

```
SPEC is set to: /opt/cpu2006-1.2  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sdal       xfs   372G   37G  335G  10% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C460M4.2.0.13b.0.080320162321 08/03/2016

Memory:

32x 0xCE00 M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz, configured at 1333 MHz
64x NO DIMM NO DIMM 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-4820 v4 2.00 GHz)

SPECfp_rate2006 = 1160

SPECfp_rate_base2006 = 1140

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Oct-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-4820 v4 2.00 GHz)

SPECfp_rate2006 = 1160

SPECfp_rate_base2006 = 1140

CPU2006 license: 9019

Test date: Oct-2016

Test sponsor: Cisco Systems

Hardware Availability: Jul-2016

Tested by: Cisco Systems

Software Availability: Dec-2015

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
    -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
    -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-4820 v4 2.00 GHz)

SPECfp_rate2006 = 1160

SPECfp_rate_base2006 = 1140

CPU2006 license: 9019

Test date: Oct-2016

Test sponsor: Cisco Systems

Hardware Availability: Jul-2016

Tested by: Cisco Systems

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-4820 v4 2.00 GHz)

SPECfp_rate2006 = 1160

SPECfp_rate_base2006 = 1140

CPU2006 license: 9019

Test date: Oct-2016

Test sponsor: Cisco Systems

Hardware Availability: Jul-2016

Tested by: Cisco Systems

Software Availability: Dec-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 15 16:07:57 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 November 2016.