



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint®2006 = 68.2

Lenovo ThinkServer RD550
(3.50 GHz, Intel Xeon E5-2637 v4)

SPECint_base2006 = 64.9

CPU2006 license: 9017


Test date: Feb-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

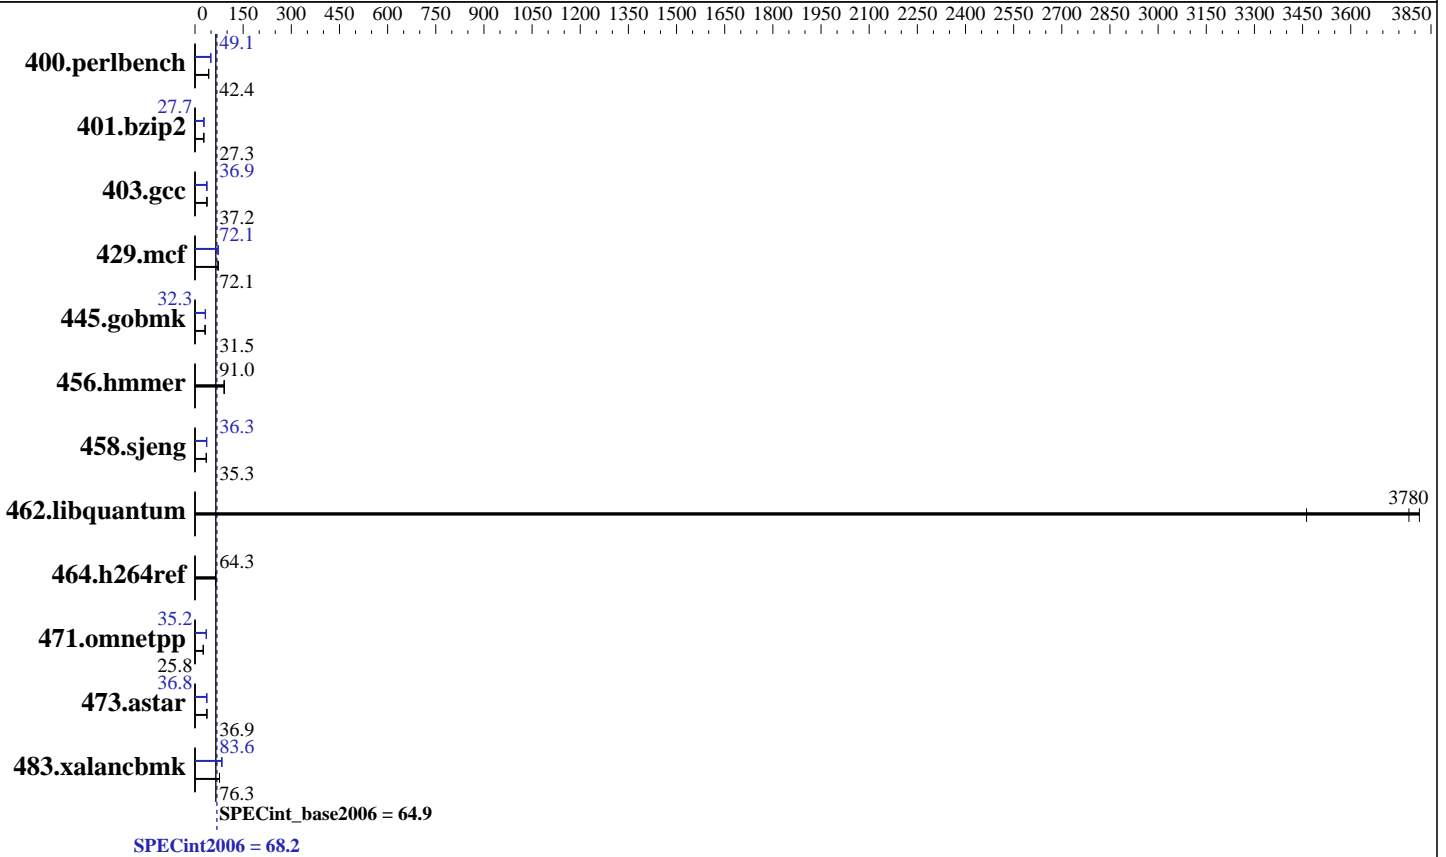

Hardware

CPU Name: Intel Xeon E5-2637 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 800 GB SATA SSD
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(3.50 GHz, Intel Xeon E5-2637 v4)

SPECint2006 = **68.2**

SPECint_base2006 = **64.9**

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Feb-2017

Hardware Availability: Mar-2016

Software Availability: Sep-2016

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|--------------------|--------------------|-------------------|--------------------|-------------------|--------------------|--------------------|--------------------|-------------------|--------------------|--------------------|--------------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 230 | 42.5 | <u>230</u> | <u>42.4</u> | 230 | 42.4 | 199 | 49.0 | <u>199</u> | <u>49.1</u> | 199 | 49.1 |
| 401.bzip2 | 353 | 27.3 | <u>353</u> | <u>27.3</u> | 352 | 27.4 | 348 | 27.7 | <u>348</u> | <u>27.7</u> | 348 | 27.7 |
| 403.gcc | 217 | 37.1 | 216 | 37.2 | <u>217</u> | <u>37.2</u> | 218 | 37.0 | <u>218</u> | <u>36.9</u> | 219 | 36.7 |
| 429.mcf | 126 | 72.2 | 127 | 71.7 | <u>126</u> | <u>72.1</u> | 126 | 72.1 | <u>126</u> | <u>72.1</u> | 126 | 72.3 |
| 445.gobmk | 333 | 31.5 | <u>333</u> | <u>31.5</u> | 332 | 31.6 | 325 | 32.3 | 325 | 32.3 | <u>325</u> | <u>32.3</u> |
| 456.hammer | <u>103</u> | <u>91.0</u> | 103 | 90.8 | 102 | 91.1 | <u>103</u> | <u>91.0</u> | 103 | 90.8 | 102 | 91.1 |
| 458.sjeng | <u>343</u> | <u>35.3</u> | 343 | 35.3 | 342 | 35.4 | 334 | 36.3 | 334 | 36.3 | <u>334</u> | <u>36.3</u> |
| 462.libquantum | <u>5.48</u> | <u>3780</u> | 5.98 | 3460 | 5.43 | 3810 | <u>5.48</u> | <u>3780</u> | 5.98 | 3460 | 5.43 | 3810 |
| 464.h264ref | 344 | 64.2 | <u>344</u> | <u>64.3</u> | 344 | 64.4 | 344 | 64.2 | <u>344</u> | <u>64.3</u> | 344 | 64.4 |
| 471.omnetpp | 243 | 25.8 | 242 | 25.9 | <u>242</u> | <u>25.8</u> | <u>177</u> | <u>35.2</u> | 178 | 35.2 | 177 | 35.3 |
| 473.astar | 190 | 36.9 | 191 | 36.8 | <u>190</u> | <u>36.9</u> | 195 | 36.0 | <u>191</u> | <u>36.8</u> | 190 | 36.9 |
| 483.xalancbmk | <u>90.4</u> | <u>76.3</u> | 90.3 | 76.4 | 90.5 | 76.3 | 82.5 | 83.7 | 82.6 | 83.5 | <u>82.6</u> | <u>83.6</u> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

BIOS Configuration:

Hyper_Threading set to Disabled

Cluster On Die set to Disabled

Early Snoop set to Enabled

Performance Profile set to Custom

C1E Support set to Disabled

Core C3 set to Disabled

Core C6 set to Disabled

CPU Performance and Energy Bias set to Disabled

Thermal Profile set to High Fan Speed

Memory Power Savings set to Disabled

Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on RD550-02 Thu Feb 16 21:00:16 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 68.2

Lenovo ThinkServer RD550
(3.50 GHz, Intel Xeon E5-2637 v4)

SPECint_base2006 = 64.9

CPU2006 license: 9017

Test date: Feb-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2637 v4 @ 3.50GHz
 2 "physical id"s (chips)
 8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings   : 4
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal:      264562596 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
```

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

uname -a:

```
Linux RD550-02 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Feb 16 20:53

SPEC is set to: /home/cpu2006-1.2-ic17.0

```
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda4        xfs      689G      23G  666G   4% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 68.2

Lenovo ThinkServer RD550
(3.50 GHz, Intel Xeon E5-2637 v4)

SPECint_base2006 = 64.9

CPU2006 license: 9017

Test date: Feb-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Platform Notes (Continued)

BIOS LENOVO PB1TS393 10/28/2016

Memory:

16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz

8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

OMP_NUM_THREADS = "8"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -DSPEC_CPU_LP64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -DSPEC_CPU_LP64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

-auto-p32

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 68.2

Lenovo ThinkServer RD550
(3.50 GHz, Intel Xeon E5-2637 v4)

SPECint_base2006 = 64.9

CPU2006 license: 9017

Test date: Feb-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

C++ benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 68.2

Lenovo ThinkServer RD550
(3.50 GHz, Intel Xeon E5-2637 v4)

SPECint_base2006 = 64.9

CPU2006 license: 9017

Test date: Feb-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Peak Optimization Flags

C benchmarks:

- 400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch
- 401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -auto-ilp32 -qopt-prefetch
- 403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-qopt-malloc-options=3 -auto-ilp32
- 429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-qopt-prefetch -auto-p32
- 445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)
- 456.hmmer: basepeak = yes
- 458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4
- 462.libquantum: basepeak = yes
- 464.h264ref: basepeak = yes

C++ benchmarks:

- 471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmarheap
- 473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmarheap64
- 483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmarheap

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(3.50 GHz, Intel Xeon E5-2637 v4)

SPECint2006 = 68.2

SPECint_base2006 = 64.9

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Feb-2017

Hardware Availability: Mar-2016

Software Availability: Sep-2016

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Mar 22 10:49:37 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 March 2017.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>