



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon


SPECrate2017\_int\_base = 111

### Sugon A320-G30 (AMD EPYC 7401P)

SPECrate2017\_int\_peak = 121

CPU2017 License: 9046  
Test Sponsor: Sugon  
Tested by: Sugon

Test Date: Dec-2017  
Hardware Availability: Dec-2017  
Software Availability: Aug-2017

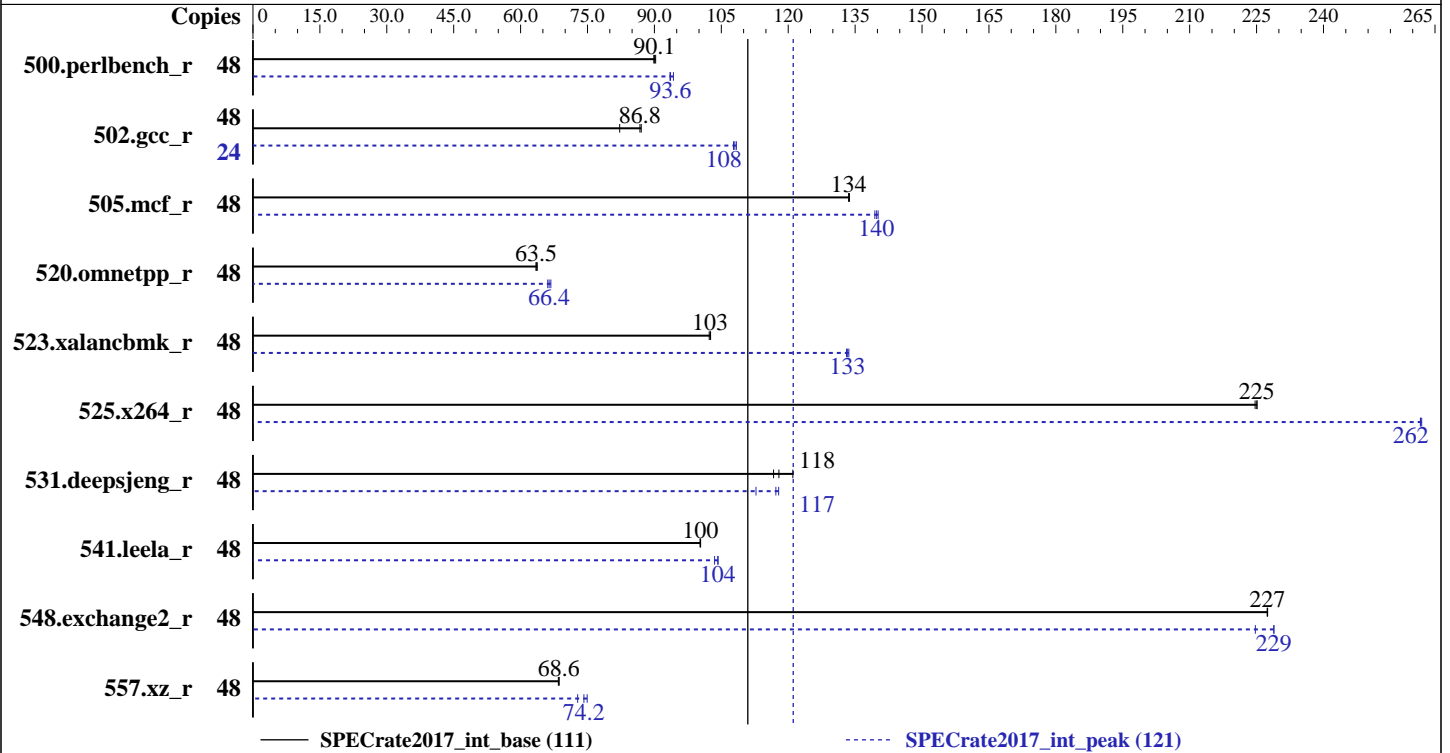

#### Hardware

CPU Name: AMD EPYC 7401P  
 Max MHz.: 3000  
 Nominal: 2000  
 Enabled: 24 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 3 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2667V-R, running at 2400)  
 Storage: 1 x 800 GB SATA, SSD  
 Other: None

#### Software

OS: Red Hat Enterprise Linux Server 7.4  
 kernel 3.10.0-693.2.2  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: American Megatrends Inc. BIOS Version 1QLSH012 released Sep-2017  
 File System: xfs  
 System State: Run level 3 (Multi User)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

SPECrate2017\_int\_base = 111

## Sugon A320-G30 (AMD EPYC 7401P)

SPECrate2017\_int\_peak = 121

CPU2017 License: 9046  
Test Sponsor: Sugon  
Tested by: Sugon

Test Date: Dec-2017  
Hardware Availability: Dec-2017  
Software Availability: Aug-2017

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	850	89.9	<b>849</b>	<b>90.1</b>	846	90.3	48	817	93.5	<b>816</b>	<b>93.6</b>	811	94.3
502.gcc_r	48	781	87.0	827	82.2	<b>783</b>	<b>86.8</b>	24	314	108	315	108	<b>315</b>	<b>108</b>
505.mcf_r	48	<b>581</b>	<b>134</b>	580	134	581	134	48	<b>555</b>	<b>140</b>	553	140	556	139
520.omnetpp_r	48	988	63.7	<b>992</b>	<b>63.5</b>	992	63.5	48	943	66.8	953	66.1	<b>948</b>	<b>66.4</b>
523.xalancbmk_r	48	496	102	<b>494</b>	<b>103</b>	494	103	48	379	134	381	133	<b>380</b>	<b>133</b>
525.x264_r	48	<b>373</b>	<b>225</b>	373	225	374	225	48	321	262	<b>321</b>	<b>262</b>	321	262
531.deepsjeng_r	48	471	117	<b>467</b>	<b>118</b>	454	121	48	<b>469</b>	<b>117</b>	488	113	467	118
541.leela_r	48	<b>792</b>	<b>100</b>	793	100	792	100	48	768	103	<b>763</b>	<b>104</b>	762	104
548.exchange2_r	48	553	227	553	227	<b>553</b>	<b>227</b>	48	549	229	<b>549</b>	<b>229</b>	560	225
557.xz_r	48	757	68.5	<b>756</b>	<b>68.6</b>	756	68.6	48	692	74.9	712	72.8	<b>699</b>	<b>74.2</b>

SPECrate2017\_int\_base = 111

SPECrate2017\_int\_peak = 121

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

### Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

SPECrate2017\_int\_base = 111

## Sugon A320-G30 (AMD EPYC 7401P)

SPECrate2017\_int\_peak = 121

**CPU2017 License:** 9046  
**Test Sponsor:** Sugon  
**Tested by:** Sugon

**Test Date:** Dec-2017  
**Hardware Availability:** Dec-2017  
**Software Availability:** Aug-2017

### General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"  
MALLOC\_CONF = "lg\_chunk:26"

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/tools-and-sdks/cpu-development/amd-optimizing-cc-compiler/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>  
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.  
jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.  
lg\_chunk: set the virtual memory chunk size (log base 2). For example, lg\_chunk:21 sets the default chunk size to 2<sup>21</sup> = 2MiB.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

### Platform Notes

BIOS settings:  
Determinism Slider = Power  
cTDP Control = Manual  
cTDP = 200  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on localhost Sat Dec 2 11:09:08 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 7401P 24-Core Processor  
1 "physical id"s (chips)  
48 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 24  
siblings : 48

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

SPECrate2017\_int\_base = 111

## Sugon A320-G30 (AMD EPYC 7401P)

SPECrate2017\_int\_peak = 121

CPU2017 License: 9046  
Test Sponsor: Sugon  
Tested by: Sugon

Test Date: Dec-2017  
Hardware Availability: Dec-2017  
Software Availability: Aug-2017

### Platform Notes (Continued)

physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 48
On-line CPU(s) list:   0-47
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              1
NUMA node(s):          4
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  1
Model name:             AMD EPYC 7401P 24-Core Processor
Stepping:               2
CPU MHz:                2000.000
CPU max MHz:           2000.0000
CPU min MHz:           1200.0000
BogoMIPS:               3992.15
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0-5,24-29
NUMA node1 CPU(s):     6-11,30-35
NUMA node2 CPU(s):     12-17,36-41
NUMA node3 CPU(s):     18-23,42-47

```

```

Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc art rep_good nopl nonstop_tsc extd_apicid aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
hw_pstate avic fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni
xsaveopt xsavec xgetbv1 arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold overflow_recov succor smca

```

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

SPECrate2017\_int\_base = 111

### Sugon A320-G30 (AMD EPYC 7401P)

SPECrate2017\_int\_peak = 121

**CPU2017 License:** 9046  
**Test Sponsor:** Sugon  
**Tested by:** Sugon

**Test Date:** Dec-2017  
**Hardware Availability:** Dec-2017  
**Software Availability:** Aug-2017

## Platform Notes (Continued)

```

node 0 size: 65445 MB
node 0 free: 63717 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 65535 MB
node 1 free: 63991 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 65535 MB
node 2 free: 64013 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 65535 MB
node 3 free: 63999 MB
node distances:
node  0  1  2  3
  0:  10  16  16  16
  1:  16  10  16  16
  2:  16  16  10  16
  3:  16  16  16  10

```

```

From /proc/meminfo
MemTotal:      263933764 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

```

```

uname -a:
Linux localhost 3.10.0-693.2.2.el7.x86_64 #1 SMP Mon Sep 25 08:21:56 EDT 2017 x86_64
x86_64 x86_64 GNU/Linux

```

run-level 3 Dec 1 21:07

```

SPEC is set to: /home/cpu2017
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs      690G   59G  632G   9% /home

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

SPECrate2017\_int\_base = 111

### Sugon A320-G30 (AMD EPYC 7401P)

SPECrate2017\_int\_peak = 121

**CPU2017 License:** 9046  
**Test Sponsor:** Sugon  
**Tested by:** Sugon

**Test Date:** Dec-2017  
**Hardware Availability:** Dec-2017  
**Software Availability:** Aug-2017

## Platform Notes (Continued)

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1QLSH012 09/15/2017

Memory:

8x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400  
8x Unknown Unknown

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 502.gcc\_r(peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
=====

=====  
CXXC 523.xalancbmk\_r(peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
=====

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base) 557.xz\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
=====

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,  
=====

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

SPECrate2017\_int\_base = 111

## Sugon A320-G30 (AMD EPYC 7401P)

SPECrate2017\_int\_peak = 121

**CPU2017 License:** 9046  
**Test Sponsor:** Sugon  
**Tested by:** Sugon

**Test Date:** Dec-2017  
**Hardware Availability:** Dec-2017  
**Software Availability:** Aug-2017

### Compiler Version Notes (Continued)

peak) 541.leela\_r(base)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
CC 500.perlbench\_r(peak) 525.x264\_r(peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
CXXC 541.leela\_r(peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
FC 548.exchange2\_r(base, peak)

-----  
GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING  
-----

### Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

SPECrate2017\_int\_base = 111

### Sugon A320-G30 (AMD EPYC 7401P)

SPECrate2017\_int\_peak = 121

**CPU2017 License:** 9046  
**Test Sponsor:** Sugon  
**Tested by:** Sugon

**Test Date:** Dec-2017  
**Hardware Availability:** Dec-2017  
**Software Availability:** Aug-2017

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-freemap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-freemap-arrays -inline-threshold=1000 -z muldefs -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(gfortran)
-O3(clang) -mavx -madx -funroll-loops -ffast-math -z muldefs -Ofast
-fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran
-lamdlibm
```





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017\_int\_base = 111

Sugon A320-G30 (AMD EPYC 7401P)

SPECrate2017\_int\_peak = 121

CPU2017 License: 9046  
Test Sponsor: Sugon  
Tested by: Sugon

Test Date: Dec-2017  
Hardware Availability: Dec-2017  
Software Availability: Aug-2017

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

```
502.gcc_r: -m32 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -fgnu89-inline
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

SPECrate2017\_int\_base = 111

### Sugon A320-G30 (AMD EPYC 7401P)

SPECrate2017\_int\_peak = 121

**CPU2017 License:** 9046  
**Test Sponsor:** Sugon  
**Tested by:** Sugon

**Test Date:** Dec-2017  
**Hardware Availability:** Dec-2017  
**Software Availability:** Aug-2017

## Peak Optimization Flags (Continued)

```
505.mcf_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc
```

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

```
523.xalancbmk_r: -m32 -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000  
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

```
541.leela_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm  
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(gfortran) -O3(clang) -mavx2  
-madx -funroll-loops -ffast-math -Ofast -fdefault-integer-8  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split  
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran  
-lamdlibm
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>  
<http://www.spec.org/cpu2017/flags/aoccl100-flags-revC-I.html>  
<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017\_int\_base = 111

Sugon A320-G30 (AMD EPYC 7401P)

SPECrate2017\_int\_peak = 121

**CPU2017 License:** 9046

**Test Sponsor:** Sugon

**Tested by:** Sugon

**Test Date:** Dec-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Aug-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.xml>

<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-12-01 22:09:07-0500.

Report generated on 2019-02-20 21:09:18 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.