



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.70 GHz, Intel Xeon Bronze 3104)

**SPECrate2017\_int\_base = 33.5**

**SPECrate2017\_int\_peak = Not Run**

CPU2017 License: 3


**Test Date:** Nov-2017

Test Sponsor: HPE

**Hardware Availability:** Oct-2017

Tested by: HPE

**Software Availability:** Sep-2017

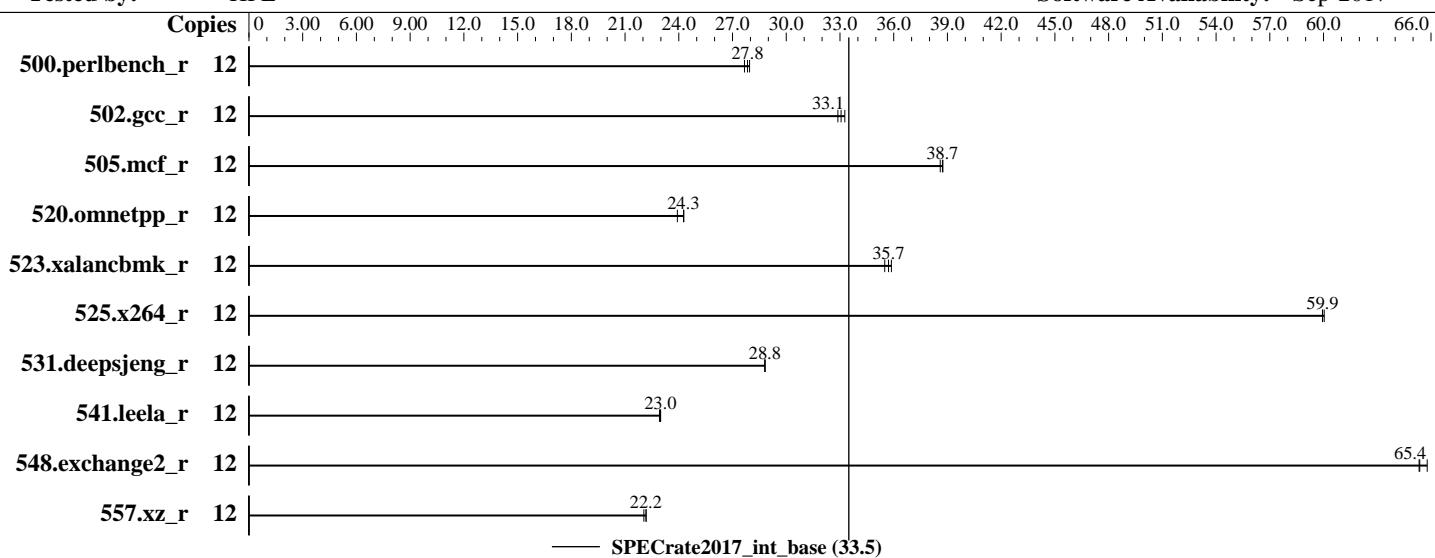

## Hardware

CPU Name: Intel Xeon Bronze 3104  
 Max MHz.: 1700  
 Nominal: 1700  
 Enabled: 12 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 8.25 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R, running at 2133)  
 Storage: 1 x 960 GB SATA SSD, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Compiler: Kernel 4.4.73-5-default  
 C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: HPE BIOS Version U30 released Oct-2017 (tested with U30 9/29/2017)  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc: jemalloc memory allocator library V5.0.1;  
 jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
 jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
 jemalloc: sources available via jemalloc.net



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.70 GHz, Intel Xeon Bronze 3104)

**SPECrate2017\_int\_base = 33.5**

**SPECrate2017\_int\_peak = Not Run**

CPU2017 License: 3

Test Date: Nov-2017

Test Sponsor: HPE

Hardware Availability: Oct-2017

Tested by: HPE

Software Availability: Sep-2017

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	690	27.7	683	28.0	<b>686</b>	<b>27.8</b>									
502.gcc_r	12	517	32.9	<b>514</b>	<b>33.1</b>	511	33.3									
505.mcf_r	12	502	38.6	500	38.7	<b>501</b>	<b>38.7</b>									
520.omnetpp_r	12	658	23.9	648	24.3	<b>649</b>	<b>24.3</b>									
523.xalancbmk_r	12	357	35.5	<b>355</b>	<b>35.7</b>	353	35.9									
525.x264_r	12	<b>351</b>	<b>59.9</b>	351	59.9	350	60.0									
531.deepsjeng_r	12	477	28.8	477	28.8	<b>477</b>	<b>28.8</b>									
541.leela_r	12	865	23.0	867	22.9	<b>865</b>	<b>23.0</b>									
548.exchange2_r	12	<b>481</b>	<b>65.4</b>	478	65.8	481	65.3									
557.xz_r	12	588	22.0	584	22.2	<b>585</b>	<b>22.2</b>									

**SPECrate2017\_int\_base = 33.5**

**SPECrate2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

irqbalance disabled with "service irqbalance stop"

tuned profile set with "tuned-adm profile throughput-performance"

VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"

Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_int\_base = 33.5

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C1E State

Workload Profile set to Custom

Sub-NUMA Clustering set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-b7s1 Thu Nov 30 09:25:41 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
  2 "physical id"s (chips)
  12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 6
  siblings   : 6
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                12
On-line CPU(s) list:  0-11
Thread(s) per core:   1
Core(s) per socket:   6
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
Stepping:               4
CPU MHz:               1696.032
BogoMIPS:              3392.06
Virtualization:        VT-x
L1d cache:             32K
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL380 Gen10 (1.70 GHz, Intel Xeon Bronze 3104)	<b>SPECrate2017_int_base = 33.5</b> <b>SPECrate2017_int_peak = Not Run</b>
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	<b>Test Date:</b> Nov-2017 <b>Hardware Availability:</b> Oct-2017 <b>Software Availability:</b> Sep-2017

## Platform Notes (Continued)

```
L1i cache: 32K
L2 cache: 1024K
L3 cache: 8448K
NUMA node0 CPU(s): 0-2,6-8
NUMA node1 CPU(s): 3-5,9-11
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movebe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xgetbv1 cqm_llc cqm_occup_llc pkru ospke
```

```
/proc/cpuinfo cache data
cache size : 8448 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 6 7 8
node 0 size: 96350 MB
node 0 free: 94096 MB
node 1 cpus: 3 4 5 9 10 11
node 1 size: 96766 MB
node 1 free: 96475 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10
```

From /proc/meminfo

```
MemTotal: 197751480 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_int\_base = 33.5

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```
os-release:  
  NAME="SLES"  
  VERSION="12-SP3"  
  VERSION_ID="12.3"  
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"  
  ID="sles"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:  
  Linux linux-b7s1 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64  
  x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 30 09:24
```

```
SPEC is set to: /home/cpu2017  
  Filesystem      Type  Size  Used Avail Use% Mounted on  
  /dev/sda4        xfs   852G   52G  801G   7%  /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 10/11/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666, configured at 2133

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
  557.xz_r(base)  
-----
```

```
=====  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
  541.leela_r(base)  
=====
```

```
=====  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL380 Gen10 (1.70 GHz, Intel Xeon Bronze 3104)	SPECrate2017_int_base = 33.5  SPECrate2017_int_peak = Not Run
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	Test Date: Nov-2017 Hardware Availability: Oct-2017 Software Availability: Sep-2017

## Compiler Version Notes (Continued)

```
=====
FC 548.exchange2_r(base)
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc

C++ benchmarks:  
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_int\_base = 33.5

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>  
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>  
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-11-30 10:25:39-0500.

Report generated on 2018-10-31 17:12:10 by CPU2017 PDF formatter v6067.

Originally published on 2018-01-14.