



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6244)

SPECspeed2017_int_base = 10.9

SPECspeed2017_int_peak = Not Run

CPU2017 License: 001176


Test Date: Mar-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Mar-2019

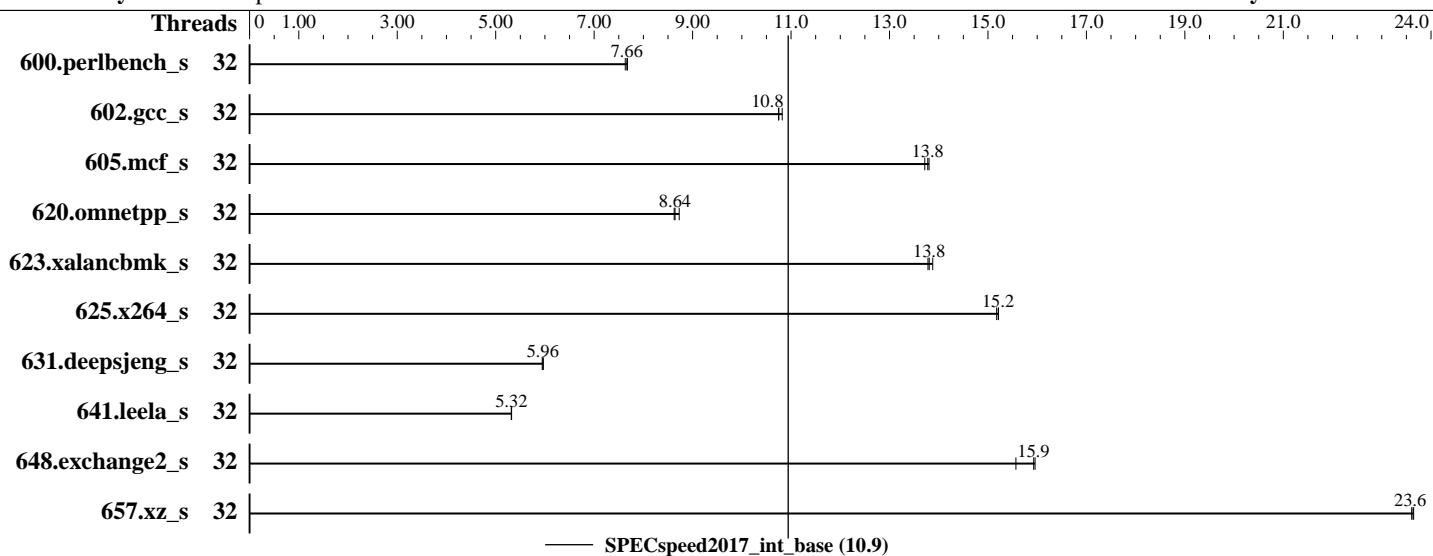

Hardware

CPU Name: Intel Xeon Gold 6244
Max MHz.: 4400
Nominal: 3600
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 24.75 MB I+D on chip per chip
Other: None
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R)
Storage: 1 x 3.84 TB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 4.12.14-94.41-default
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel: Yes
Firmware: Version 3.0a released Feb-2019 tested as Jan-2019
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6244)

SPECspeed2017_int_base = 10.9

SPECspeed2017_int_peak = Not Run

CPU2017 License: 001176

Test Date: Mar-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Mar-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	233	7.63	231	7.68	<u>232</u>	<u>7.66</u>							
602.gcc_s	32	<u>370</u>	<u>10.8</u>	368	10.8	371	10.7							
605.mcf_s	32	342	13.8	<u>343</u>	<u>13.8</u>	344	13.7							
620.omnetpp_s	32	187	8.73	189	8.63	<u>189</u>	<u>8.64</u>							
623.xalancbmk_s	32	<u>103</u>	<u>13.8</u>	103	13.8	102	13.9							
625.x264_s	32	116	15.2	116	15.2	<u>116</u>	<u>15.2</u>							
631.deepsjeng_s	32	241	5.95	<u>241</u>	<u>5.96</u>	240	5.97							
641.leela_s	32	321	5.32	<u>321</u>	<u>5.32</u>	321	5.32							
648.exchange2_s	32	<u>185</u>	<u>15.9</u>	189	15.6	184	16.0							
657.xz_s	32	<u>262</u>	<u>23.6</u>	262	23.6	261	23.6							

SPECspeed2017_int_base = 10.9

SPECspeed2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6244)

SPECspeed2017_int_base = 10.9

SPECspeed2017_int_peak = Not Run

CPU2017 License: 001176

Test Date: Mar-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Mar-2019

Platform Notes

BIOS Settings:

Intel Virtualization Technology = Disable

SNC = Disable

Stale AtoS = Enable

LLC Dead Line Alloc = Disable

IMC Interleaving = 1-way Interleave

Patrol Scrub = Disable

Power Performance Tuning = BIOS Controls EPB

Energy Performance BIAS Setting = Performance

Enhanced Halt State (C1E) = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux Thu Mar 14 22:18:03 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 4 8 17 18 19 24 25 27

physical 1: cores 2 3 4 17 18 19 24 25

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 32

On-line CPU(s) list: 0-31

Thread(s) per core: 2

Core(s) per socket: 8

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz

Stepping: 6

CPU MHz: 3600.000

CPU max MHz: 4400.0000

CPU min MHz: 1200.0000

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6244)

SPECspeed2017_int_base = 10.9

SPECspeed2017_int_peak = Not Run

CPU2017 License: 001176

Test Date: Mar-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Mar-2019

Platform Notes (Continued)

BogoMIPS: 7200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-7,16-23
NUMA node1 CPU(s): 8-15,24-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 25344 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 96235 MB
node 0 free: 95878 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 96741 MB
node 1 free: 96248 MB
node distances:
node 0 1
0: 10 21
1: 21 10

From /proc/meminfo
MemTotal: 197608912 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4

From /etc/*release* /etc/*version*
SuSE-release:

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6244)

SPECspeed2017_int_base = 10.9

SPECspeed2017_int_peak = Not Run

CPU2017 License: 001176

Test Date: Mar-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Mar-2019

Platform Notes (Continued)

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 4

This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP4"

VERSION_ID="12.4"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:

Linux linux 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901) x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Mar 14 22:15

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	3.5T	119G	3.4T	4%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.0a 01/12/2019

Memory:

12x Micron Technology 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933, configured at 2934
4x NO DIMM NO DIMM

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base)

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6244)

SPECspeed2017_int_base = 10.9

SPECspeed2017_int_peak = Not Run

CPU2017 License: 001176

Test Date: Mar-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Mar-2019

Compiler Version Notes (Continued)

657.xz_s(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
641.leela_s(base)

=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 648.exchange2_s(base)

=====
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029TP-HTR
(X11DPT-PS, Intel Xeon Gold 6244)

SPECspeed2017_int_base = 10.9

SPECspeed2017_int_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Mar-2019

Base Portability Flags (Continued)

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-04-02.xml>
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-03-15 01:18:02-0400.

Report generated on 2019-04-02 16:59:41 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.