



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System
2.00 GHz, AMD EPYC 7702P

SPECspeed®2017_fp_base = 133

SPECspeed®2017_fp_peak = 137

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

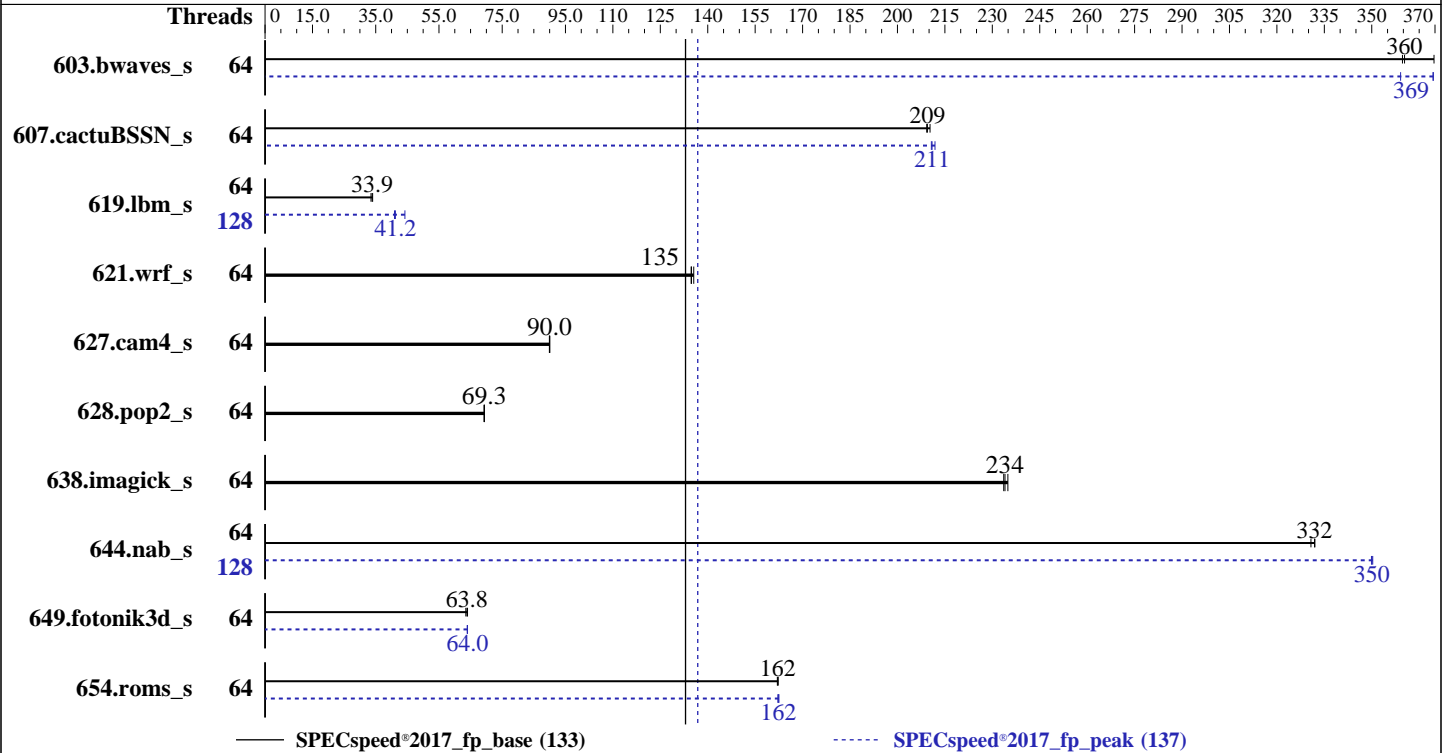

Hardware

CPU Name: AMD EPYC 7702P
 Max MHz: 3350
 Nominal: 2000
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 4 cores
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 240 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86_64)
 Kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 0302 released Aug-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: --



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System
2.00 GHz, AMD EPYC 7702P

SPECSpeed®2017_fp_base = 133

SPECSpeed®2017_fp_peak = 137

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	164	360	160	370	164	360	64	160	369	160	369	164	359
607.cactuBSSN_s	64	79.6	209	79.3	210	79.7	209	64	79.1	211	79.0	211	78.7	212
619.lbm_s	64	156	33.5	154	34.0	155	33.9	128	128	40.9	127	41.2	118	44.2
621.wrf_s	64	98.2	135	97.6	136	98.1	135	64	98.2	135	97.6	136	98.1	135
627.cam4_s	64	98.4	90.1	98.6	89.9	98.5	90.0	64	98.4	90.1	98.6	89.9	98.5	90.0
628.pop2_s	64	171	69.4	171	69.3	171	69.3	64	171	69.4	171	69.3	171	69.3
638.imagick_s	64	61.4	235	61.6	234	61.8	234	64	61.4	235	61.6	234	61.8	234
644.nab_s	64	52.6	332	52.8	331	52.6	332	128	49.9	350	49.9	350	49.9	350
649.fotonik3d_s	64	144	63.5	143	63.8	142	64.0	64	143	63.9	142	64.0	142	64.0
654.roms_s	64	97.0	162	97.2	162	97.1	162	64	96.9	162	97.1	162	96.9	162

SPECSpeed®2017_fp_base = **133**

SPECSpeed®2017_fp_peak = **137**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System
2.00 GHz, AMD EPYC 7702P

SPECspeed®2017_fp_base = 133

SPECspeed®2017_fp_peak = 137

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

General Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-127"

LD_LIBRARY_PATH = "/spec2017new/amd_speed_aocc200_rome_B_lib/64;/spec2017new/amd_speed_aocc200_rome_B_lib/32:"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "128"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration:

Power phase shedding = Disabled

SVM Mode = Disabled

SR-IOV support = Disabled

DRAM Scrub time = Disabled

NUMA nodes per socket = NPS4

Determinism Slider = Power

Sysinfo program /spec2017new/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-k4o7 Tue Sep 24 15:01:55 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7702P 64-Core Processor

1 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System
2.00 GHz, AMD EPYC 7702P

SPECspeed®2017_fp_base = 133

SPECspeed®2017_fp_peak = 137

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
siblings : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 43 bits physical, 48 bits virtual
CPU(s): 128
On-line CPU(s) list: 0-127
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 1
NUMA node(s): 4
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7702P 64-Core Processor
Stepping: 0
CPU MHz: 2000.000
CPU max MHz: 2000.0000
CPU min MHz: 1500.0000
BogoMIPS: 4040.03
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
```

```
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca
```

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System
2.00 GHz, AMD EPYC 7702P

SPECspeed®2017_fp_base = 133

SPECspeed®2017_fp_peak = 137

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Platform Notes (Continued)

cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79

node 0 size: 128796 MB

node 0 free: 128554 MB

node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95

node 1 size: 129011 MB

node 1 free: 128845 MB

node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111

node 2 size: 129011 MB

node 2 free: 128853 MB

node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127

node 3 size: 128996 MB

node 3 free: 128629 MB

node distances:

node	0	1	2	3
0:	10	12	12	12
1:	12	10	12	12
2:	12	12	10	12
3:	12	12	12	10

From /proc/meminfo

MemTotal: 528194168 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="SLES"

VERSION="15-SP1"

VERSION_ID="15.1"

PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"

ID="sles"

ID_LIKE="suse"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:

Linux linux-k4o7 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System
2.00 GHz, AMD EPYC 7702P

SPECspeed®2017_fp_base = 133

SPECspeed®2017_fp_peak = 137

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Sep 24 08:51

SPEC is set to: /spec2017new

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	199G	25G	175G	13%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0302 08/07/2019

Memory:

8x Samsung M393A8G40AB2-CWE 64 kB 2 rank 3200

8x Unknown Unknown

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
  | 644.nab_s(base, peak)
=====

```

```

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

```

```

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System
2.00 GHz, AMD EPYC 7702P

SPECspeed®2017_fp_base = 133

SPECspeed®2017_fp_peak = 137

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

Fortran benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System
2.00 GHz, AMD EPYC 7702P

SPECspeed®2017_fp_base = 133

SPECspeed®2017_fp_peak = 137

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System
2.00 GHz, AMD EPYC 7702P

SPECspeed®2017_fp_base = 133

SPECspeed®2017_fp_peak = 137

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

638.imagick_s: basepeak = yes

644.nab_s: Same as 619.lbm_s

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System
2.00 GHz, AMD EPYC 7702P

SPECspeed®2017_fp_base = 133

SPECspeed®2017_fp_peak = 137

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

```
603.bwaves_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

649.fotonik3d_s: Same as 603.bwaves_s

```
654.roms_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000
-O3 -funroll-loops -Mrecursive -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -lmvec -lamdlibm -ljemalloc -lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System
2.00 GHz, AMD EPYC 7702P

SPECspeed®2017_fp_base = 133

SPECspeed®2017_fp_peak = 137

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Peak Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Rome-V1.0-revA.html>

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.2019-09-17.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Rome-V1.0-revA.xml>

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.2019-09-17.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-24 03:01:55-0400.

Report generated on 2019-10-15 14:43:27 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-15.