



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 157

H3C UniServer R4900 G3 (Intel Xeon Silver 4214R)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066


Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2020

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

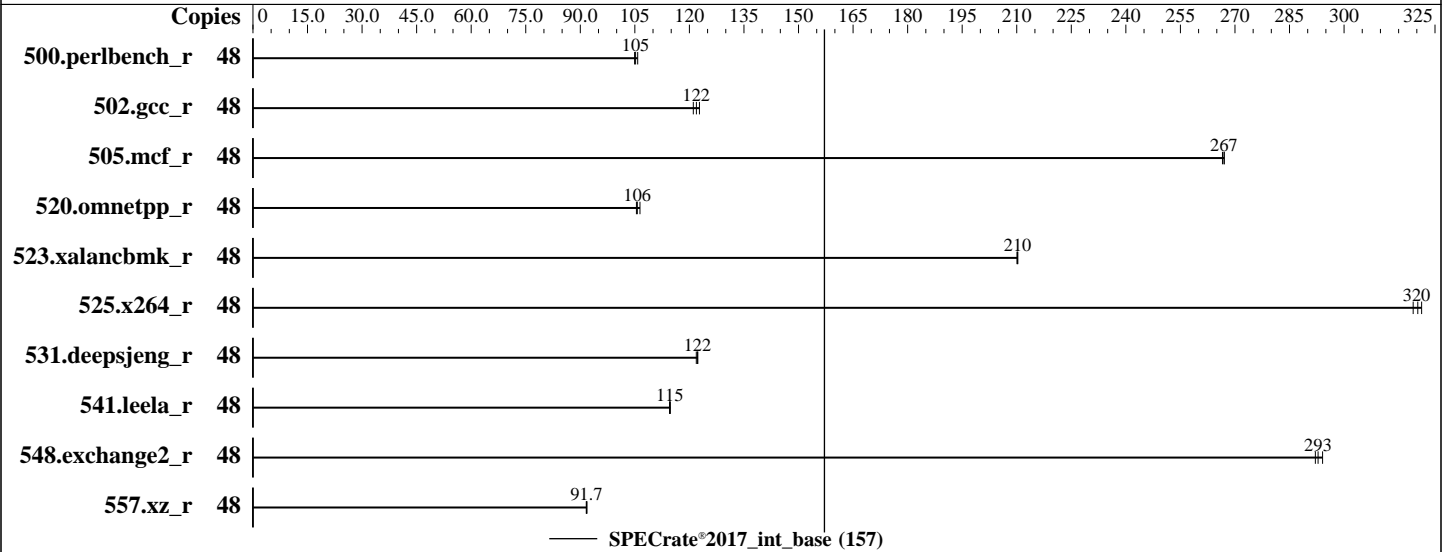

Hardware

CPU Name: Intel Xeon Silver 4214R
 Max MHz: 3500
 Nominal: 2400
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 16.5 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
 Storage: 2 x 600 GB SAS HDD,10000RPM,RAID 1
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler Build 20200306 for Linux; Fortran: Version 19.1.1.217 of Intel Fortran Compiler Build 20200306 for Linux
 Parallel: No
 Firmware: Version 2.00.33 released Aug-2019 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 157

H3C UniServer R4900 G3 (Intel Xeon Silver 4214R)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	726	105	728	105	722	106							
502.gcc_r	48	557	122	554	123	561	121							
505.mcf_r	48	290	267	291	267	291	267							
520.omnetpp_r	48	596	106	592	106	597	105							
523.xalancbmk_r	48	241	210	241	210	241	210							
525.x264_r	48	262	320	263	319	262	321							
531.deepsjeng_r	48	450	122	451	122	450	122							
541.leela_r	48	694	115	693	115	693	115							
548.exchange2_r	48	428	294	429	293	431	292							
557.xz_r	48	565	91.7	566	91.6	564	91.8							

SPECrate®2017_int_base = 157

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux. The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 157

H3C UniServer R4900 G3 (Intel Xeon Silver 4214R)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Platform Notes

BIOS settings:

Set SNC to Enabled

Set IMC Interleaving to 1-way Interleave

Set Patrol Scrub to Disabled

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Wed Oct 21 01:32:14 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4214R CPU @ 2.40GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 48

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 157

H3C UniServer R4900 G3 (Intel Xeon Silver 4214R)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2020

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

Platform Notes (Continued)

```

On-line CPU(s) list: 0-47
Thread(s) per core: 2
Core(s) per socket: 12
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Silver 4214R CPU @ 2.40GHz
Stepping: 7
CPU MHz: 3286.634
CPU max MHz: 3500.0000
CPU min MHz: 1000.0000
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0-2,6-8,24-26,30-32
NUMA node1 CPU(s): 3-5,9-11,27-29,33-35
NUMA node2 CPU(s): 12-14,18-20,36-38,42-44
NUMA node3 CPU(s): 15-17,21-23,39-41,45-47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 24 25 26 30 31 32
node 0 size: 95074 MB
node 0 free: 92683 MB
node 1 cpus: 3 4 5 9 10 11 27 28 29 33 34 35
node 1 size: 96765 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 157

H3C UniServer R4900 G3 (Intel Xeon Silver 4214R)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Platform Notes (Continued)

```

node 1 free: 95084 MB
node 2 cpus: 12 13 14 18 19 20 36 37 38 42 43 44
node 2 size: 96737 MB
node 2 free: 94854 MB
node 3 cpus: 15 16 17 21 22 23 39 40 41 45 46 47
node 3 size: 96764 MB
node 3 free: 94454 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

```

From /proc/meminfo

```

MemTotal:      394590152 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.2 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.2"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
  ANSI_COLOR="0;31"
  redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
  system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```

uname -a:

```

Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

itlb_multihit:                                KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):            Not affected
Microarchitectural Data Sampling:            Not affected
CVE-2017-5754 (Meltdown):                     Not affected
CVE-2018-3639 (Speculative Store Bypass):     Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):            Mitigation: usercopy/swaps barriers and __user
                                                pointer sanitization

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 157

H3C UniServer R4900 G3 (Intel Xeon Silver 4214R)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

tsx_async_abort: Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Oct 20 17:16

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	503G	18G	485G	4%	/home

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 2.00.33 08/22/2019

Vendor: Unis Huashan Technologies Co., Ltd.

Product: UniServer R4900 G3

Product Family: Rack

Serial: 210200A00QH177000025

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666

12x NO DIMM NO DIMM

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
          | 525.x264_r(base) 557.xz_r(base)
=====

```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```

=====
C++       | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
          | 541.leela_r(base)
=====

```

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 157

H3C UniServer R4900 G3 (Intel Xeon Silver 4214R)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Compiler Version Notes (Continued)

=====
Fortran | 548.exchange2_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 157

H3C UniServer R4900 G3 (Intel Xeon Silver 4214R)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2020

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

Base Optimization Flags (Continued)

C benchmarks (continued):

-lqkmalloc

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse  
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-20 13:32:13-0400.

Report generated on 2020-11-10 15:18:49 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-10.