



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 88.5

H3C UniServer R6900 G3 (Intel Xeon Gold 5222)

SPECSpeed®2017_fp_peak = 89.7

CPU2017 License: 9066


Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

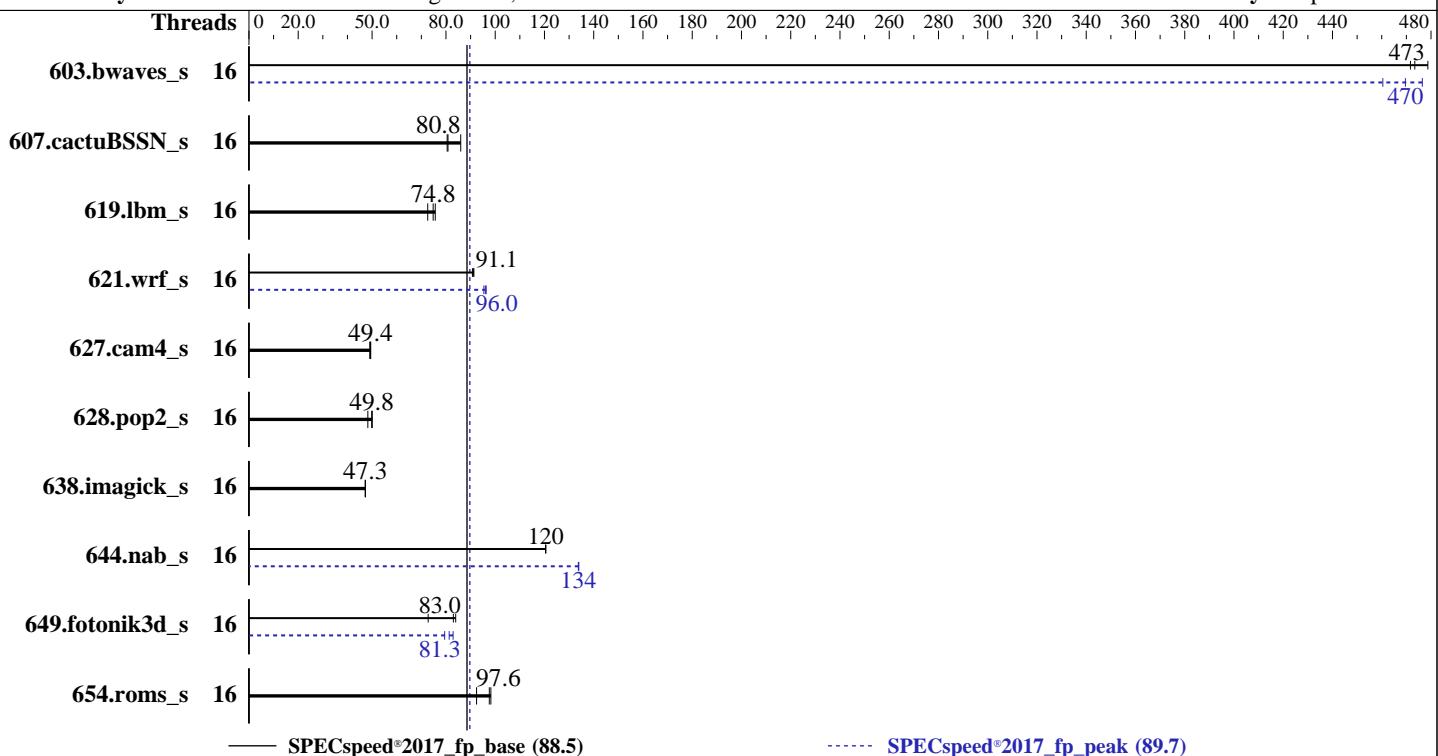

Hardware		Software	
CPU Name:	Intel Xeon Gold 5222	OS:	Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
Max MHz:	3900	Compiler:	C/C++: Version 19.1.1.217 of Intel C/C++ Compiler Build 20200306 for Linux;
Nominal:	3800		Fortran: Version 19.1.1.217 of Intel Fortran Compiler Build 20200306 for Linux
Enabled:	16 cores, 4 chips	Parallel:	Yes
Orderable:	1,2,3,4 chips	Firmware:	Version 2.00.33 released Aug-2019 BIOS
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	xfs
L2:	1 MB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	16.5 MB I+D on chip per chip	Base Pointers:	64-bit
Other:	None	Peak Pointers:	64-bit
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2933V-R)	Other:	jemalloc memory allocator V5.0.1
Storage:	1 x 960 GB SATA SSD	Power Management:	BIOS set to prefer performance at the cost of additional power usage
Other:	None		



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 88.5

H3C UniServer R6900 G3 (Intel Xeon Gold 5222)

SPECSpeed®2017_fp_peak = 89.7

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	123	479	<u>125</u>	473	125	472	16	124	476	128	460	<u>126</u>	470
607.cactuBSSN_s	16	206	80.8	194	86.0	207	80.5	16	206	80.8	194	86.0	207	80.5
619.lbm_s	16	70.0	74.8	69.2	75.7	72.2	72.6	16	70.0	74.8	69.2	75.7	72.2	72.6
621.wrf_s	16	145	91.1	145	91.3	146	90.7	16	139	95.4	137	96.3	138	96.0
627.cam4_s	16	181	49.0	179	49.4	<u>179</u>	49.4	16	181	49.0	179	49.4	<u>179</u>	49.4
628.pop2_s	16	238	49.8	237	50.1	246	48.3	16	238	49.8	237	50.1	246	48.3
638.imagick_s	16	305	47.2	<u>305</u>	47.3	305	47.3	16	305	47.2	<u>305</u>	47.3	305	47.3
644.nab_s	16	145	120	145	120	145	121	16	131	134	131	134	130	134
649.fotonik3d_s	16	109	84.0	<u>110</u>	83.0	125	72.8	16	110	82.9	115	79.5	112	81.3
654.roms_s	16	161	97.6	160	98.2	170	92.4	16	161	97.6	160	98.2	170	92.4
SPECSpeed®2017_fp_base =							88.5	SPECSpeed®2017_fp_peak =						
SPECSpeed®2017_fp_peak =							89.7							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 88.5

H3C UniServer R6900 G3 (Intel Xeon Gold 5222)

SPECSpeed®2017_fp_peak = 89.7

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Set Hyper Threading to Disabled

Set Patrol Scrub to Disabled

Set IMC Interleaving to 2-way Interleave

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on localhost.localdomain Wed Oct 28 00:08:00 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5222 CPU @ 3.80GHz
        4 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
    cpu cores : 4
    siblings : 4
    physical 0: cores 1 2 5 13
    physical 1: cores 5 8 9 13
    physical 2: cores 1 2 5 13
    physical 3: cores 1 2 5 12
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               16
On-line CPU(s) list: 0-15
Thread(s) per core:  1
Core(s) per socket:  4
Socket(s):            4
NUMA node(s):         4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 5222 CPU @ 3.80GHz
Stepping:              7
CPU MHz:              2807.431
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 88.5

H3C UniServer R6900 G3 (Intel Xeon Gold 5222)

SPECSpeed®2017_fp_peak = 89.7

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

Platform Notes (Continued)

CPU max MHz: 3900.0000
CPU min MHz: 1200.0000
BogoMIPS: 7600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0-3
NUMA node1 CPU(s): 4-7
NUMA node2 CPU(s): 8-11
NUMA node3 CPU(s): 12-15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf fm perf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpq rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveropt xsaverc xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni md_clear flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 16896 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3
node 0 size: 95073 MB
node 0 free: 94629 MB
node 1 cpus: 4 5 6 7
node 1 size: 96766 MB
node 1 free: 90776 MB
node 2 cpus: 8 9 10 11
node 2 size: 96766 MB
node 2 free: 95461 MB
node 3 cpus: 12 13 14 15
node 3 size: 96738 MB
node 3 free: 96287 MB
node distances:
node    0    1    2    3
  0: 10 31 21 21
  1: 31 10 21 21
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 88.5

H3C UniServer R6900 G3 (Intel Xeon Gold 5222)

SPECSpeed®2017_fp_peak = 89.7

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

Platform Notes (Continued)

```
2: 21 21 10 31  
3: 21 21 31 10
```

```
From /proc/meminfo  
MemTotal: 394593880 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux"  
  VERSION="8.2 (Ootpa)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VERSION_ID="8.2"  
  PLATFORM_ID="platform:el8"  
  PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"  
  ANSI_COLOR="0;31"  
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)  
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:  
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

itlb_multihit:	KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
tsx_async_abort:	Mitigation: Clear CPU buffers; SMT disabled

run-level 3 Oct 27 19:33

```
SPEC is set to: /home/speccpu  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 839G 112G 727G 14% /home
```

From /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 88.5

H3C UniServer R6900 G3 (Intel Xeon Gold 5222)

SPECSpeed®2017_fp_peak = 89.7

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

Platform Notes (Continued)

BIOS: American Megatrends Inc. 2.00.33 08/22/2019

Vendor: New H3C Technologies Co., Ltd.

Product: H3C UniServer R6900 G3

Product Family: Rack

Serial: 210235A3T0H204000004

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Micron 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933

24x NO DIMM NO DIMM

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 88.5

H3C UniServer R6900 G3 (Intel Xeon Gold 5222)

SPECSpeed®2017_fp_peak = 89.7

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

Compiler Version Notes (Continued)

64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 88.5

H3C UniServer R6900 G3 (Intel Xeon Gold 5222)

SPECspeed®2017_fp_peak = 89.7

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs  
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 88.5

H3C UniServer R6900 G3 (Intel Xeon Gold 5222)

SPECSpeed®2017_fp_peak = 89.7

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

```
644.nab_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.html



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 88.5

H3C UniServer R6900 G3 (Intel Xeon Gold 5222)

SPECSpeed®2017_fp_peak = 89.7

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.xml

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-27 12:07:59-0400.

Report generated on 2020-11-25 10:28:39 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-24.