



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239

SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

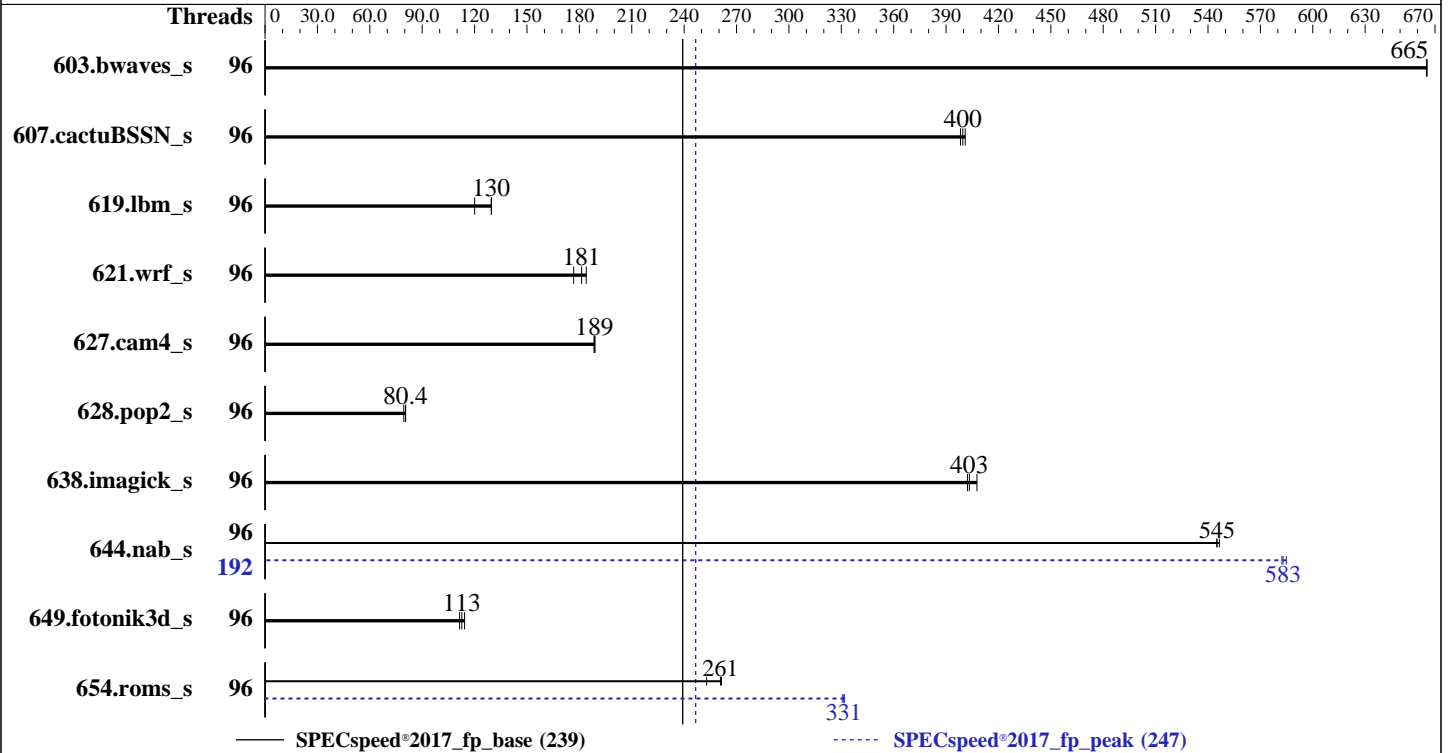

Hardware

CPU Name: AMD EPYC 7643
 Max MHz: 3600
 Nominal: 2300
 Enabled: 96 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 6 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 240 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86_64)
 Kernel 5.3.18-22-default
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 0404 released Feb-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECSpeed®2017_fp_base = 239

SPECSpeed®2017_fp_peak = 247

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	88.7	665	88.7	665	88.7	665	96	88.7	665	88.7	665	88.7	665
607.cactuBSSN_s	96	41.7	400	41.6	401	41.9	398	96	41.7	400	41.6	401	41.9	398
619.lbm_s	96	40.4	130	40.4	130	43.6	120	96	40.4	130	40.4	130	43.6	120
621.wrf_s	96	71.9	184	74.8	177	73.0	181	96	71.9	184	74.8	177	73.0	181
627.cam4_s	96	47.0	189	46.9	189	47.0	188	96	47.0	189	46.9	189	47.0	188
628.pop2_s	96	149	79.5	147	80.5	148	80.4	96	149	79.5	147	80.5	148	80.4
638.imagick_s	96	35.8	403	35.9	402	35.4	408	96	35.8	403	35.9	402	35.4	408
644.nab_s	96	32.0	547	32.0	545	32.1	545	192	30.0	583	30.0	582	29.9	585
649.fotonik3d_s	96	80.9	113	79.8	114	81.8	111	96	80.9	113	79.8	114	81.8	111
654.roms_s	96	60.2	261	62.3	253	60.4	261	96	47.5	331	47.6	331	47.5	332

SPECSpeed®2017_fp_base = **239**

SPECSpeed®2017_fp_peak = **247**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239
SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s, and 638.imagick_s,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 644.nab_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-191"
LD_LIBRARY_PATH =
"/spec2017B1/amd_speed_aocc300_milan_B_lib/64:/spec2017B1/amd_speed_aocc
300_milan_B_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "192"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0 96 1 97 2 98 3 99 4 100 5 101 6 102 7 103 8 104 9 105
10 106 11 107 12 108 13 109 14 110 15 111 16 112 17 113 18 114 19 115 20
116 21 117 22 118 23 119 24 120 25 121 26 122 27 123 28 124 29 125 30
126 31 127 32 128 33 129 34 130 35 131 36 132 37 133 38 134 39 135 40
136 41 137 42 138 43 139 44 140 45 141 46 142 47 143 48 144 49 145 50
146 51 147 52 148 53 149 54 150 55 151 56 152 57 153 58 154 59 155 60
156 61 157 62 158 63 159 64 160 65 161 66 162 67 163 68 164 69 165 70
166 71 167 72 168 73 169 74 170 75 171 76 172 77 173 78 174 79 175 80
176 81 177 82 178 83 179 84 180 85 181 86 182 87 183 88 184 89 185 90
186 91 187 92 188 93 189 94 190 95 191"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-95"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239

SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

General Notes (Continued)

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration:
DLWM Support = Disabled
SVM Mode = Disabled
NUMA nodes per socket = NPS1
APBDIS = 1
Fix SOC P-state = P0
Engine Boost = Enabled

Sysinfo program /spec2017B1/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost Fri Apr 9 12:43:14 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7643 48-Core Processor
2 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 48
siblings : 96
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
32 33 34 35 36 37 40 41 42 43 44 45 48 49 50 51 52 53 56 57 58 59 60 61
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
32 33 34 35 36 37 40 41 42 43 44 45 48 49 50 51 52 53 56 57 58 59 60 61

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 192
On-line CPU(s) list: 0-191
Thread(s) per core: 2
Core(s) per socket: 48

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239

SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Platform Notes (Continued)

```

Socket(s): 2
NUMA node(s): 2
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7643 48-Core Processor
Stepping: 1
CPU MHz: 2802.693
CPU max MHz: 2300.0000
CPU min MHz: 1500.0000
BogoMIPS: 4591.10
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 32768K
NUMA node0 CPU(s): 0-47,96-143
NUMA node1 CPU(s): 48-95,144-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102 103
104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125
126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143
node 0 size: 515820 MB
node 0 free: 514866 MB
node 1 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72
73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 144 145 146 147
148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169
170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239

SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Platform Notes (Continued)

```
node 1 size: 516068 MB
node 1 free: 515549 MB
node distances:
node 0 1
  0: 10 32
  1: 32 10
```

From /proc/meminfo

```
MemTotal:      1056654748 kB
HugePages_Total:      0
Hugepagesize:      2048 kB
```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

uname -a:

```
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit): Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline,
IBPB: conditional, IBRS_FW, STIBP:
always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239

SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Platform Notes (Continued)

run-level 3 Apr 9 10:18

SPEC is set to: /spec2017B1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xf	199G	65G	135G	33%	/

From /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.
 Product: RS720A-E11-RS12E
 Product Family: Server
 Serial: 123456789012

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200
 16x Unknown Unknown

BIOS:

BIOS Vendor: American Megatrends Inc.
 BIOS Version: 0404
 BIOS Date: 02/02/2021
 BIOS Revision: 4.4

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
  | 644.nab_s(base, peak)
=====

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239

SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Compiler Version Notes (Continued)

```

LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

```

=====
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                  | 654.roms_s(base, peak)
=====

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

```

=====
Fortran, C       | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
=====

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```




SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239

SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64

628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize

-Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3

-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5

-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

-fremap-arrays -mllvm -function-specialize -flv-function-specialization

-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true

-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs

-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc

-lflang -lflangrti

Fortran benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239

SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-fininline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239

SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239

SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

644.nab_s (continued):

```
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

```
654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.30 GHz, AMD EPYC 7643

SPECspeed®2017_fp_base = 239

SPECspeed®2017_fp_peak = 247

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.2.html>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.2.xml>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-04-09 00:43:14-0400.

Report generated on 2021-05-12 13:40:30 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-11.