



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant DL365 Gen10 Plus  
(3.0 GHz, AMD EPYC 7313)

SPECspeed®2017\_fp\_base = 172

SPECspeed®2017\_fp\_peak = 181

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2021  
Hardware Availability: Apr-2021  
Software Availability: Mar-2021

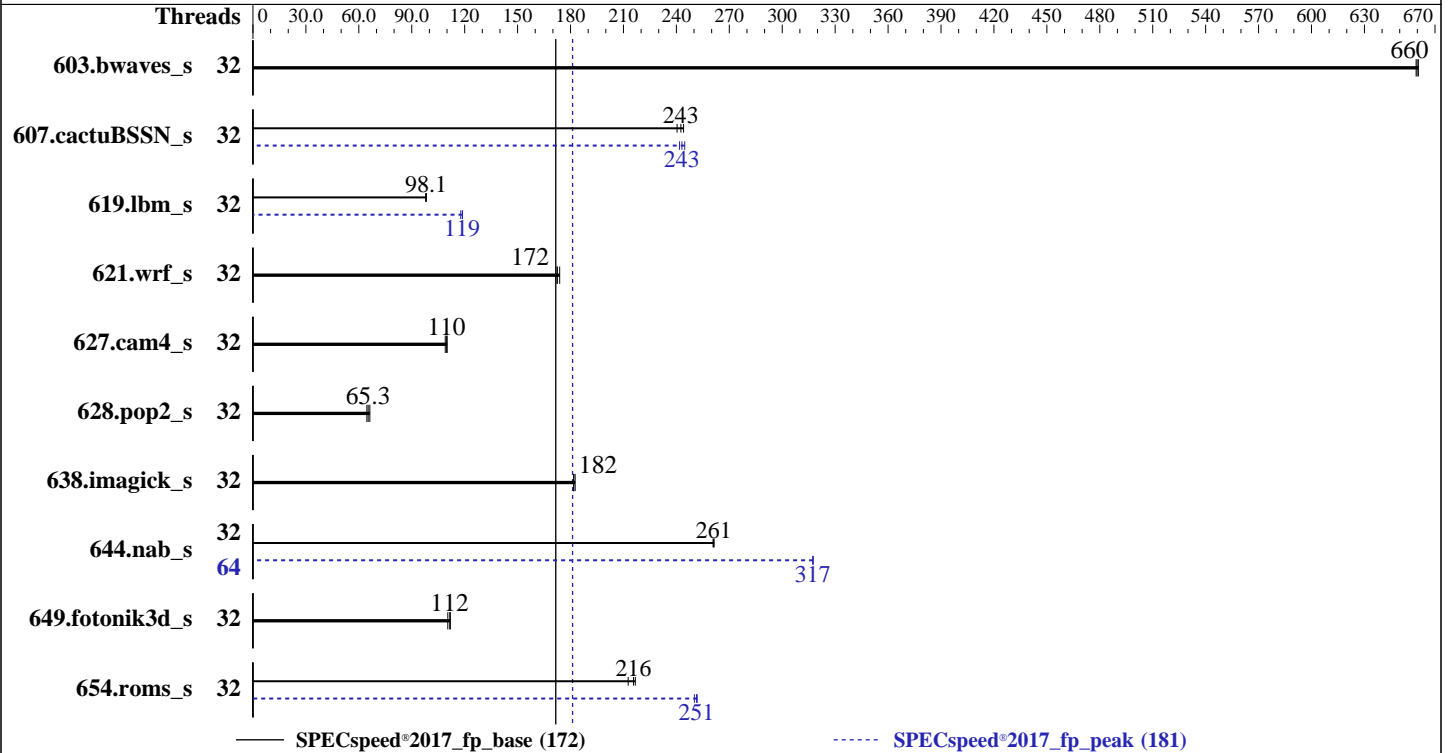

### Hardware

CPU Name: AMD EPYC 7313  
 Max MHz: 3700  
 Nominal: 3000  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 32 MB shared / 4 cores  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)  
 Storage: 1 x 196 GB SATA SSD, RAID 0  
 Other: None

### Software

OS: Ubuntu 20.04.1 LTS (x86\_64)  
 Kernel 5.4.0-56-generic  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: Yes  
 Firmware: HPE BIOS Version A42 v2.40 02/23/2021 released Feb-2021  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus  
(3.0 GHz, AMD EPYC 7313)

SPECSpeed®2017\_fp\_base = 172

SPECSpeed®2017\_fp\_peak = 181

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2021  
Hardware Availability: Apr-2021  
Software Availability: Mar-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	89.5	659	89.3	661	<b>89.4</b>	<b>660</b>	32	89.5	659	89.3	661	<b>89.4</b>	<b>660</b>
607.cactuBSSN_s	32	<b>68.7</b>	<b>243</b>	68.3	244	69.3	240	32	68.1	245	<b>68.6</b>	<b>243</b>	68.9	242
619.lbm_s	32	<b>53.4</b>	<b>98.1</b>	53.5	97.9	53.3	98.3	32	<b>44.1</b>	<b>119</b>	44.5	118	44.1	119
621.wrf_s	32	76.1	174	<b>76.7</b>	<b>172</b>	76.7	172	32	76.1	174	<b>76.7</b>	<b>172</b>	76.7	172
627.cam4_s	32	<b>80.8</b>	<b>110</b>	80.5	110	81.3	109	32	<b>80.8</b>	<b>110</b>	80.5	110	81.3	109
628.pop2_s	32	<b>182</b>	<b>65.3</b>	179	66.2	184	64.6	32	<b>182</b>	<b>65.3</b>	179	66.2	184	64.6
638.imagick_s	32	79.0	183	<b>79.3</b>	<b>182</b>	79.4	182	32	79.0	183	<b>79.3</b>	<b>182</b>	79.4	182
644.nab_s	32	<b>66.9</b>	<b>261</b>	67.0	261	66.9	261	64	55.0	317	<b>55.0</b>	<b>317</b>	55.1	317
649.fotonik3d_s	32	82.5	110	81.5	112	<b>81.7</b>	<b>112</b>	32	82.5	110	81.5	112	<b>81.7</b>	<b>112</b>
654.roms_s	32	<b>73.0</b>	<b>216</b>	74.0	213	72.7	217	32	62.9	250	<b>62.6</b>	<b>251</b>	62.5	252

SPECSpeed®2017\_fp\_base = 172

SPECSpeed®2017\_fp\_peak = 181

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
'echo 8 > /proc/sys/vm/dirty\_ratio' run as root to limit dirty cache to 8% of memory.  
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.  
'echo 1 > /proc/sys/vm/zone\_reclaim\_mode' run as root to free node-local memory and avoid remote memory usage.  
'sync; echo 3 > /proc/sys/vm/drop\_caches' run as root to reset filesystem caches.  
'sysctl -w kernel.randomize\_va\_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

**SPECspeed®2017\_fp\_base = 172**

**SPECspeed®2017\_fp\_peak = 181**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.  
To enable THP only on request for peak runs of 628.pop2\_s, and 638.imagick\_s,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To disable THP for peak runs of 627.cam4\_s, 644.nab\_s, 649.fotonik3d\_s, and 654.roms\_s,  
'echo never > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-63"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017n/amd\_speed\_aocc300\_milan\_B\_lib/64;/home/cpu2017n/amd\_spee  
d\_aocc300\_milan\_B\_lib/32:"  
MALLOC\_CONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 607.cactuBSSN\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 619.lbm\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 644.nab\_s peak run:  
GOMP\_CPU\_AFFINITY = "0 32 1 33 2 34 3 35 4 36 5 37 6 38 7 39 8 40 9 41 10 42  
11 43 12 44 13 45 14 46 15 47 16 48 17 49 18 50 19 51 20 52 21 53 22 54  
23 55 24 56 25 57 26 58 27 59 28 60 29 61 30 62 31 63"

Environment variables set by runcpu during the 654.roms\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

**SPECspeed®2017\_fp\_base = 172**

**SPECspeed®2017\_fp\_peak = 181**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

### BIOS Configuration

Workload Profile set to General Peak Frequency Compute  
Determinism Control set to Manual  
Performance Determinism set to Power Deterministic  
Last-Level Cache (LLC) as NUMA Node set to Enabled  
NUMA memory domains per socket set to One memory domain per socket  
Thermal Configuration set to Maximum Cooling  
Workload Profile set to Custom  
Infinity Fabric Power Management set to Disabled  
Infinity Fabric Performance State set to P0  
Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017n/bin/sysinfo  
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
running on admin Thu Apr 2 02:35:28 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name : AMD EPYC 7313 16-Core Processor
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

### From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 64
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

**SPECspeed®2017\_fp\_base = 172**

**SPECspeed®2017\_fp\_peak = 181**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Platform Notes (Continued)

```

On-line CPU(s) list:          0-63
Thread(s) per core:          2
Core(s) per socket:          16
Socket(s):                    2
NUMA node(s):                8
Vendor ID:                    AuthenticAMD
CPU family:                   25
Model:                        1
Model name:                   AMD EPYC 7313 16-Core Processor
Stepping:                     1
Frequency boost:              enabled
CPU MHz:                      3637.266
CPU max MHz:                  3000.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     5989.34
Virtualization:              AMD-V
L1d cache:                    1 MiB
L1i cache:                    1 MiB
L2 cache:                     16 MiB
L3 cache:                     256 MiB
NUMA node0 CPU(s):           0-3,32-35
NUMA node1 CPU(s):           4-7,36-39
NUMA node2 CPU(s):           8-11,40-43
NUMA node3 CPU(s):           12-15,44-47
NUMA node4 CPU(s):           16-19,48-51
NUMA node5 CPU(s):           20-23,52-55
NUMA node6 CPU(s):           24-27,56-59
NUMA node7 CPU(s):           28-31,60-63
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

**SPECspeed®2017\_fp\_base = 172**

**SPECspeed®2017\_fp\_peak = 181**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Platform Notes (Continued)

ibpb stibp vmcall fsgsbase bml avx2 smep bmi2 invpcid cqm rdt\_a rdseed adx smap  
clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc  
cqm\_mbm\_total cqm\_mbm\_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm\_lock  
nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold  
v\_umsave\_vmload vgif umip pku ospke vaes vpcmulqdq rdpid overflow\_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 257800 MB
node 0 free: 257564 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 258046 MB
node 1 free: 257750 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 258046 MB
node 2 free: 257899 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 245935 MB
node 3 free: 245666 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 258021 MB
node 4 free: 257881 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 258046 MB
node 5 free: 257921 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 258046 MB
node 6 free: 257891 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 258043 MB
node 7 free: 257914 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 11 11 11 32 32 32 32
 1:  11 10 11 11 32 32 32 32
 2:  11 11 10 11 32 32 32 32
 3:  11 11 11 10 32 32 32 32
 4:  32 32 32 32 10 11 11 11
 5:  32 32 32 32 11 10 11 11
 6:  32 32 32 32 11 11 10 11
 7:  32 32 32 32 11 11 11 10
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

**SPECspeed®2017\_fp\_base = 172**

**SPECspeed®2017\_fp\_peak = 181**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Platform Notes (Continued)

From /proc/meminfo

MemTotal: 2101232320 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sbin/tuned-adm active  
Current active profile: balanced

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
performance

/usr/bin/lsb\_release -d  
Ubuntu 20.04.1 LTS

From /etc/\*release\* /etc/\*version\*

debian\_version: bullseye/sid  
os-release:  
NAME="Ubuntu"  
VERSION="20.04.1 LTS (Focal Fossa)"  
ID=ubuntu  
ID\_LIKE=debian  
PRETTY\_NAME="Ubuntu 20.04.1 LTS"  
VERSION\_ID="20.04"  
HOME\_URL="https://www.ubuntu.com/"  
SUPPORT\_URL="https://help.ubuntu.com/"

uname -a:

Linux admin 5.4.0-56-generic #62-Ubuntu SMP Mon Nov 23 19:20:19 UTC 2020 x86\_64 x86\_64  
x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

**SPECspeed®2017\_fp\_base = 172**

**SPECspeed®2017\_fp\_peak = 181**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Platform Notes (Continued)

run-level 5 Apr 1 17:24

SPEC is set to: /home/cpu2017n

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	196G	50G	137G	27%	/

From /sys/devices/virtual/dmi/id

Vendor: HPE  
Product: ProLiant DL365 Gen10 Plus  
Product Family: ProLiant  
Serial: CN70430NKR

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x UNKNOWN M386AAG40AM3-CWE 128 GB 4 rank 3200  
16x UNKNOWN NOT AVAILABLE

BIOS:

BIOS Vendor: HPE  
BIOS Version: A42  
BIOS Date: 02/23/2021  
BIOS Revision: 2.40  
Firmware Revision: 2.40

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
=====
```

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```
=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

**SPECspeed®2017\_fp\_base = 172**

**SPECspeed®2017\_fp\_peak = 181**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
654.roms\_s(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
628.pop2\_s(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

**SPECspeed®2017\_fp\_base = 172**

**SPECspeed®2017\_fp\_peak = 181**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs  
-DSPEC\_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang -lflangrti

Fortran benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

**SPECspeed®2017\_fp\_base = 172**

**SPECspeed®2017\_fp\_peak = 181**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-fininline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

SPECspeed®2017\_fp\_base = 172

SPECspeed®2017\_fp\_peak = 181

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: -m64 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=5 -mllvm -unroll-threshold=50

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

**SPECSpeed®2017\_fp\_base = 172**

**SPECSpeed®2017\_fp\_peak = 181**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Peak Optimization Flags (Continued)

619.lbm\_s (continued):

```
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

638.imagick\_s: basepeak = yes

```
644.nab_s: -m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

```
654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.0 GHz, AMD EPYC 7313)

SPECspeed®2017\_fp\_base = 172

SPECspeed®2017\_fp\_peak = 181

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2020-04-01 22:35:28-0400.

Report generated on 2021-05-12 13:42:09 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-11.