



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 219

H3C UniServer R4900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_int_peak = 227

CPU2017 License: 9066


Test Date: Aug-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2020

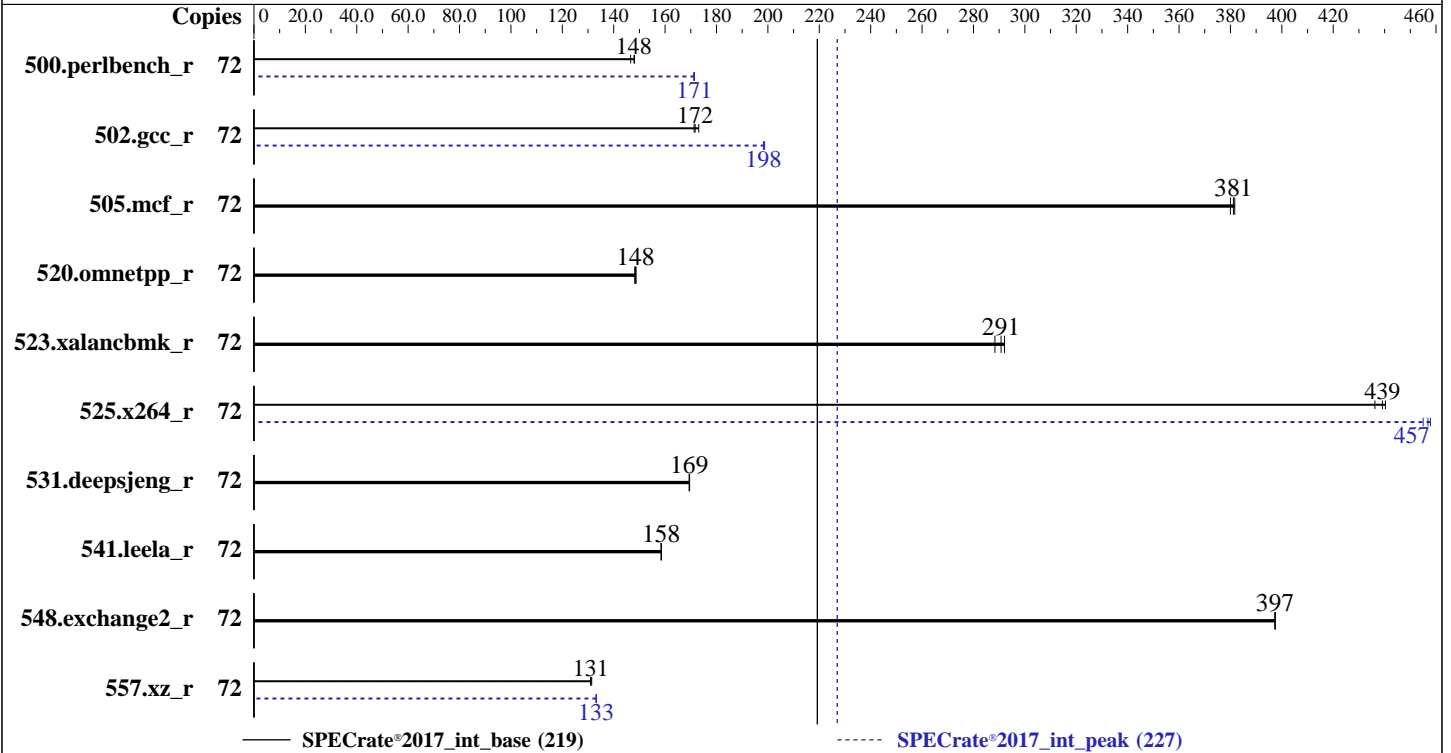

Hardware

CPU Name: Intel Xeon Gold 5220
 Max MHz: 3900
 Nominal: 2200
 Enabled: 36 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
 Storage: 1 x 480GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
 Parallel: No
 Firmware: Version 2.00.49 released Apr-2021 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 219

H3C UniServer R4900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_int_peak = 227

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021

Hardware Availability: Jun-2019

Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	72	<u>775</u>	<u>148</u>	774	148	782	147	72	670	171	669	171	<u>669</u>	<u>171</u>
502.gcc_r	72	<u>594</u>	<u>172</u>	595	171	589	173	72	<u>514</u>	<u>198</u>	514	198	513	199
505.mcf_r	72	305	382	306	380	<u>305</u>	<u>381</u>	72	305	382	306	380	<u>305</u>	<u>381</u>
520.omnetpp_r	72	635	149	637	148	<u>636</u>	<u>148</u>	72	635	149	637	148	<u>636</u>	<u>148</u>
523.xalancbmk_r	72	<u>262</u>	<u>291</u>	260	292	264	288	72	<u>262</u>	<u>291</u>	260	292	264	288
525.x264_r	72	289	436	286	440	<u>287</u>	<u>439</u>	72	<u>276</u>	<u>457</u>	277	455	275	458
531.deepsjeng_r	72	<u>487</u>	<u>169</u>	487	170	487	169	72	<u>487</u>	<u>169</u>	487	170	487	169
541.leela_r	72	<u>752</u>	<u>158</u>	752	158	752	159	72	<u>752</u>	<u>158</u>	752	158	752	159
548.exchange2_r	72	<u>475</u>	<u>397</u>	475	397	475	397	72	<u>475</u>	<u>397</u>	475	397	475	397
557.xz_r	72	<u>593</u>	<u>131</u>	594	131	592	131	72	584	133	583	133	<u>584</u>	<u>133</u>

SPECrate®2017_int_base = 219

SPECrate®2017_int_peak = 227

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 219

H3C UniServer R4900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_int_peak = 227

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021

Hardware Availability: Jun-2019

Software Availability: Dec-2020

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

Set SNC to Enabled

Set IMC Interleaving to 1-way Interleave

Set Patrol Scrub to Disabled

Set XPT Prefetcher to Enabled

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Wed Aug 11 08:16:15 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5220 CPU @ 2.20GHz
```

```
2 "physical id"s (chips)
```

```
72 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
```

```
siblings : 36
```

```
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

```
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

From lscpu from util-linux 2.32.1:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 72

On-line CPU(s) list: 0-71

Thread(s) per core: 2

Core(s) per socket: 18

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 219

H3C UniServer R4900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_int_peak = 227

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021

Hardware Availability: Jun-2019

Software Availability: Dec-2020

Platform Notes (Continued)

```

Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5220 CPU @ 2.20GHz
Stepping: 6
CPU MHz: 2700.008
CPU max MHz: 3900.0000
CPU min MHz: 1000.0000
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-2,5,6,9,10,14,15,36-38,41,42,45,46,50,51
NUMA node1 CPU(s): 3,4,7,8,11-13,16,17,39,40,43,44,47-49,52,53
NUMA node2 CPU(s): 18-20,23,24,27,28,32,33,54-56,59,60,63,64,68,69
NUMA node3 CPU(s): 21,22,25,26,29-31,34,35,57,58,61,62,65-67,70,71
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 9 10 14 15 36 37 38 41 42 45 46 50 51
node 0 size: 95092 MB
node 0 free: 94745 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 39 40 43 44 47 48 49 52 53
node 1 size: 96763 MB
node 1 free: 96457 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 54 55 56 59 60 63 64 68 69
node 2 size: 96763 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 219

H3C UniServer R4900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_int_peak = 227

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021

Hardware Availability: Jun-2019

Software Availability: Dec-2020

Platform Notes (Continued)

```

node 2 free: 95875 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 57 58 61 62 65 66 67 70 71
node 3 size: 96735 MB
node 3 free: 96285 MB
node distances:
node 0 1 2 3
0: 10 11 21 21
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10

```

```

From /proc/meminfo
MemTotal: 394604756 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```

```

uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 219

H3C UniServer R4900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_int_peak = 227

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021

Hardware Availability: Jun-2019

Software Availability: Dec-2020

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): Bypass disabled via prctl and seccomp
Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported

CVE-2019-11135 (TSX Asynchronous Abort): Mitigation: Clear CPU buffers; SMT vulnerable

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	392G	96G	296G	25%	/home

From /sys/devices/virtual/dmi/id

Vendor: New H3C Technologies Co., Ltd.
Product: UniServer R4900 G3
Product Family: Rack
Serial: 210235A3TKH19B000002

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Hynix HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2666
12x NO DIMM NO DIMM

BIOS:

BIOS Vendor: American Megatrends Inc.
BIOS Version: 2.00.49
BIOS Date: 04/16/2021
BIOS Revision: 5.14

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C | 500.perlbench_r(peak) 557.xz_r(peak)
-----
```

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 219

H3C UniServer R4900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_int_peak = 227

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021

Hardware Availability: Jun-2019

Software Availability: Dec-2020

Compiler Version Notes (Continued)

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(peak) 557.xz_r(peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 219

H3C UniServer R4900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_int_peak = 227

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021

Hardware Availability: Jun-2019

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 219

H3C UniServer R4900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_int_peak = 227

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021

Hardware Availability: Jun-2019

Software Availability: Dec-2020

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 219

H3C UniServer R4900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_int_peak = 227

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021

Hardware Availability: Jun-2019

Software Availability: Dec-2020

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench_r: icc

557.xz_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2)

-xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4 -fno-strict-overflow

-mbranches-within-32B-boundaries

-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin

-lqkmalloc

502.gcc_r: -m32

-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin

-std=gnu89 -w1, -z, muldefs -fprofile-generate(pass 1)

-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto

-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 219

H3C UniServer R4900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_int_peak = 227

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021

Hardware Availability: Jun-2019

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

502.gcc_r (continued):

```
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto  
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-11 08:16:14-0400.

Report generated on 2021-09-14 19:14:52 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-14.