



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

SPECrate®2017\_fp\_base = 60.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19


Test Date: Dec-2021

Test Sponsor: Fujitsu

Hardware Availability: Mar-2022

Tested by: Fujitsu

Software Availability: Jun-2021

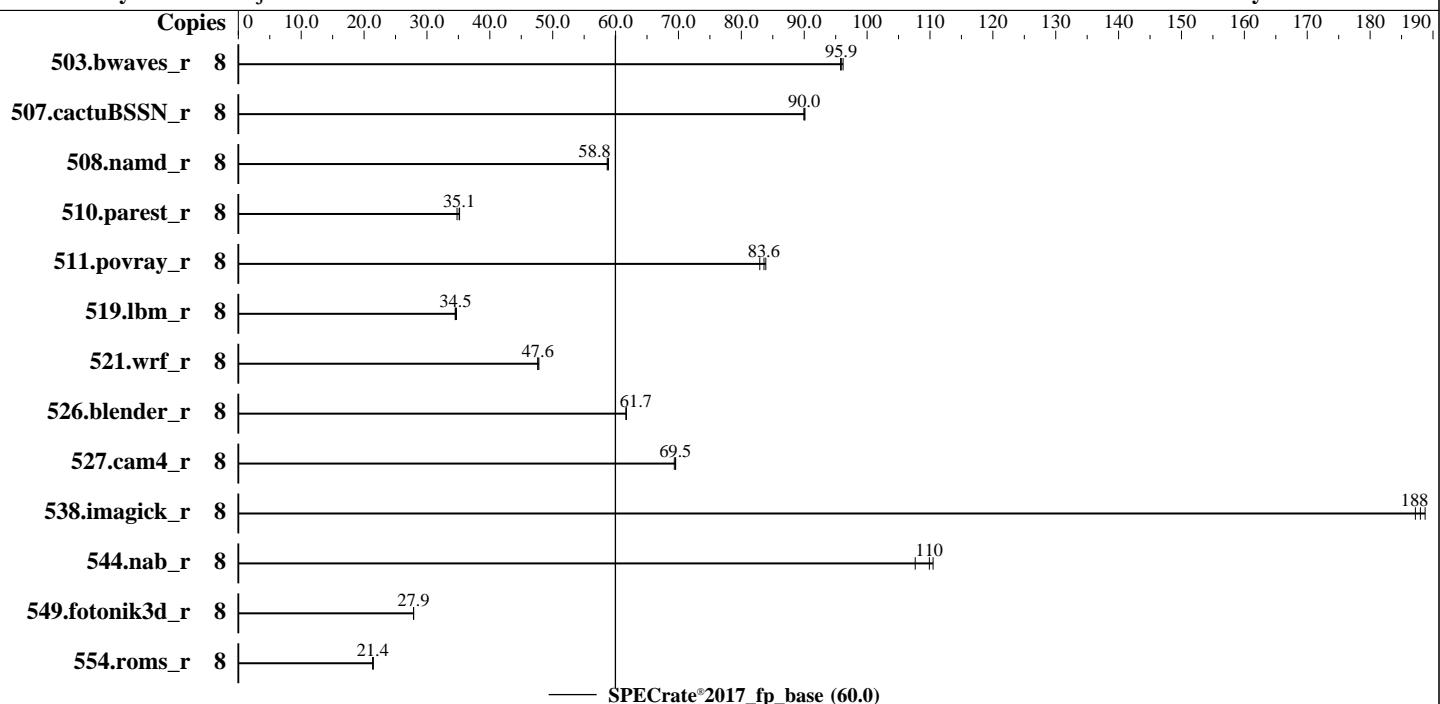

SPECrate®2017\_fp\_base (60.0)

## Hardware

CPU Name: Intel Xeon E-2388G  
 Max MHz: 5100  
 Nominal: 3200  
 Enabled: 8 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 16 MB I+D on chip per chip  
 Other: None  
 Memory: 32 GB (2 x 16 GB 2Rx8 PC4-3200AA-E)  
 Storage: 1 x SATA M.2 SSD, 240GB  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 SP3  
 5.3.18-57-default  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V5.0.0.22 R1.30.0 for D3931-A1x. Released Mar-2022 tested as V5.0.0.22 R1.15.0 for D3931-A1x Dec-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

SPECrate®2017\_fp\_base = 60.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2021

Test Sponsor: Fujitsu

Hardware Availability: Mar-2022

Tested by: Fujitsu

Software Availability: Jun-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	8	<b>837</b>	<b>95.9</b>	834	96.2	838	95.8							
507.cactuBSSN_r	8	112	90.1	113	90.0	<b>113</b>	<b>90.0</b>							
508.namd_r	8	130	58.7	<b>129</b>	<b>58.8</b>	129	58.9							
510.parest_r	8	602	34.8	<b>596</b>	<b>35.1</b>	595	35.2							
511.povray_r	8	225	82.9	<b>223</b>	<b>83.6</b>	223	83.9							
519.lbm_r	8	243	34.7	<b>244</b>	<b>34.5</b>	244	34.5							
521.wrf_r	8	375	47.8	376	47.6	<b>376</b>	<b>47.6</b>							
526.blender_r	8	198	61.7	197	61.7	<b>197</b>	<b>61.7</b>							
527.cam4_r	8	<b>201</b>	<b>69.5</b>	201	69.6	202	69.3							
538.imagick_r	8	<b>106</b>	<b>188</b>	106	187	105	189							
544.nab_r	8	<b>123</b>	<b>110</b>	125	108	122	110							
549.fotonik3d_r	8	1119	27.9	1118	27.9	<b>1119</b>	<b>27.9</b>							
554.roms_r	8	<b>594</b>	<b>21.4</b>	595	21.4	592	21.5							

SPECrate®2017\_fp\_base = 60.0

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/PVT/speccpu-1.1.8_b/lib/intel64:/home/PVT/speccpu-1.1.8_b/je5.0.1
    -64"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M5, Intel Xeon E-2388G, 3.20GHz

SPECrate®2017\_fp\_base = 60.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2021

Hardware Availability: Mar-2022

Software Availability: Jun-2021

## General Notes (Continued)

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Hyper Threading = Disabled

C-States Auto Demotion = Disabled

C-States Un Demotion = Disabled

DDR Speed Control = Auto

DMI Gen3 ASPM = ASPM L0s

FAN Control = Full

```
Sysinfo program /home/PVT/speccpu-1.1.8_b/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on localhost Mon Dec 13 20:25:31 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) E-2388G CPU @ 3.20GHz
```

```
 1 "physical id"s (chips)
```

```
 8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
  cpu cores : 8
```

```
  siblings : 8
```

```
  physical 0: cores 0 1 2 3 4 5 6 7
```

From lscpu from util-linux 2.36.2:

```
Architecture: x86_64
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

SPECrate®2017\_fp\_base = 60.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2021

Test Sponsor: Fujitsu

Hardware Availability: Mar-2022

Tested by: Fujitsu

Software Availability: Jun-2021

## Platform Notes (Continued)

CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
Address sizes: 39 bits physical, 48 bits virtual  
CPU(s): 8  
On-line CPU(s) list: 0-7  
Thread(s) per core: 1  
Core(s) per socket: 8  
Socket(s): 1  
NUMA node(s): 1  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 167  
Model name: Intel(R) Xeon(R) E-2388G CPU @ 3.20GHz  
Stepping: 1  
CPU MHz: 1000.156  
CPU max MHz: 5100.0000  
CPU min MHz: 800.0000  
BogoMIPS: 6384.00  
Virtualization: VT-x  
L1d cache: 384 KiB  
L1i cache: 256 KiB  
L2 cache: 4 MiB  
L3 cache: 16 MiB  
NUMA node0 CPU(s): 0-7  
Vulnerability Itlb multihit: Not affected  
Vulnerability Llft: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmpf perf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb invpcid\_single ssbd ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmi1 avx2 smep bmi2 erms invpcid mpx avx512f avx512dq rdseed adx smap avx512ifma clflushopt intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp\_notify hwp\_act\_window hwp\_epp hwp\_pkg\_req avx512vbmi umip pkru ospke avx512\_vbmi2 gfni vaes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M5, Intel Xeon E-2388G, 3.20GHz

SPECrate®2017\_fp\_base = 60.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2021

Test Sponsor: Fujitsu

Hardware Availability: Mar-2022

Tested by: Fujitsu

Software Availability: Jun-2021

## Platform Notes (Continued)

```
vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid fsrm md_clear flush_l1d  
arch_capabilities
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	512K	4M	8	Unified	2	1024	1	64
L3	16M	16M	16	Unified	3	16384	1	64

```
/proc/cpuinfo cache data  
cache size : 16384 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)  
node 0 cpus: 0 1 2 3 4 5 6 7  
node 0 size: 31512 MB  
node 0 free: 31044 MB  
node distances:  
node 0  
0: 10
```

From /proc/meminfo

```
MemTotal: 32269196 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has  
powersave
```

From /etc/\*release\* /etc/\*version\*

```
os-release:  
NAME="SLES"  
VERSION="15-SP3"  
VERSION_ID="15.3"  
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"  
ID="sles"  
ID_LIKE="suse"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:15:sp3"
```

uname -a:

```
Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021  
(ba3c2e9/1p-5d9e8aa) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M5, Intel Xeon E-2388G, 3.20GHz

SPECrate®2017\_fp\_base = 60.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2021

Test Sponsor: Fujitsu

Hardware Availability: Mar-2022

Tested by: Fujitsu

Software Availability: Jun-2021

## Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Dec 13 16:11

SPEC is set to: /home/PVT/speccpu-1.1.8\_b

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	140G	64G	76G	46%	/home

From /sys/devices/virtual/dmi/id

Vendor:	FUJITSU
Product:	PRIMERGY TX1320 M5
Product Family:	SERVER
Serial:	EWBTxxxxxx

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Samsung M391A2K43DB1-CWE 16 GB 2 rank 3200

BIOS:

BIOS Vendor:	FUJITSU // American Megatrends International, LLC.
BIOS Version:	V5.0.0.22 R1.15.0 for D3931-Alx
BIOS Date:	12/03/2021
BIOS Revision:	1.15

(End of data from sysinfo program)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M5, Intel Xeon E-2388G, 3.20GHz

SPECrate®2017\_fp\_base = 60.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2021

Test Sponsor: Fujitsu

Hardware Availability: Mar-2022

Tested by: Fujitsu

Software Availability: Jun-2021

## Compiler Version Notes

=====

C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd\_r(base) 510.parest\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 507.cactusBSSN\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M5, Intel Xeon E-2388G, 3.20GHz

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

SPECrate®2017\_fp\_base = 60.0

SPECrate®2017\_fp\_peak = Not Run

Test Date: Dec-2021

Hardware Availability: Mar-2022

Software Availability: Jun-2021

## Compiler Version Notes (Continued)

```
=====
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
-----
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

SPECrate®2017\_fp\_base = 60.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2021

Test Sponsor: Fujitsu

Hardware Availability: Mar-2022

Tested by: Fujitsu

Software Availability: Jun-2021

## Base Portability Flags (Continued)

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M5, Intel Xeon E-2388G, 3.20GHz

SPECrate®2017\_fp\_base = 60.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2021

Hardware Availability: Mar-2022

Software Availability: Jun-2021

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevC.html>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevC.xml>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-13 06:25:31-0500.

Report generated on 2022-01-05 13:34:42 by CPU2017 PDF formatter v6442.

Originally published on 2022-01-04.