



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M7, Intel Xeon Gold 6434H, 3.70GHz

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

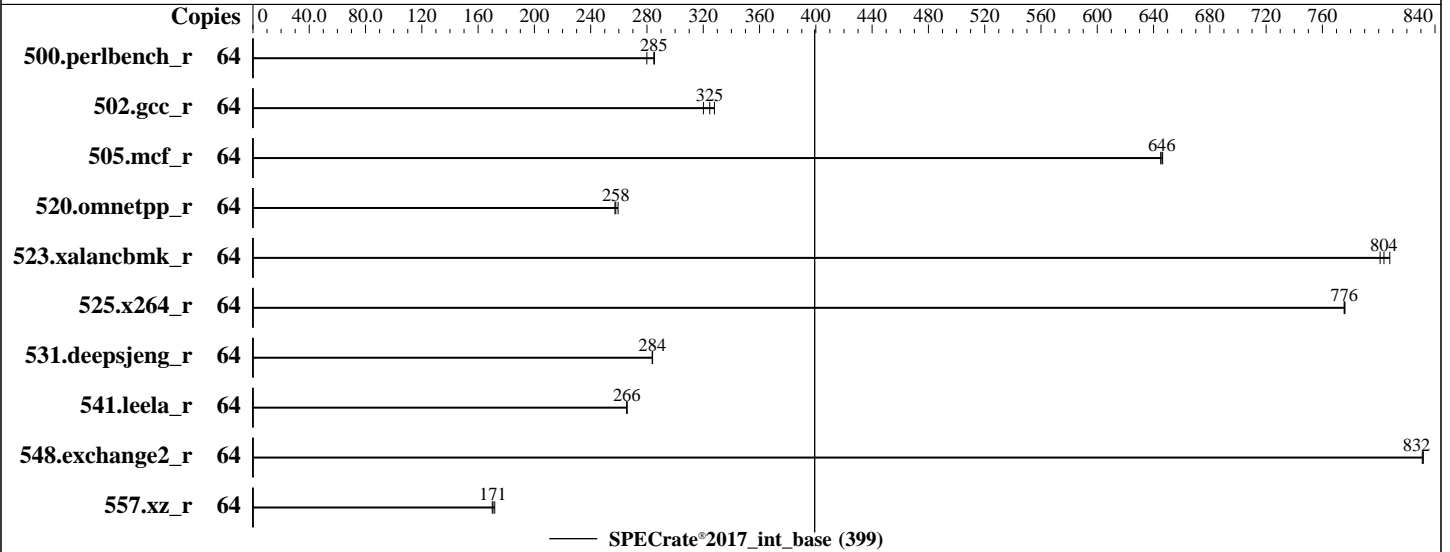

### Hardware

CPU Name: Intel Xeon Gold 6434H  
 Max MHz: 4100  
 Nominal: 3700  
 Enabled: 32 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 22.5 MB I+D on chip per chip  
 Other: None  
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for D3984-A1x. Released Jun-2023 tested as V1.0.0.0 R0.26.1 for D3984-A1x Jan-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M7, Intel Xeon Gold 6434H, 3.70GHz

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Apr-2023  
Hardware Availability: Jun-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	<b>358</b>	<b>285</b>	357	285	364	280							
502.gcc_r	64	276	328	<b>279</b>	<b>325</b>	283	320							
505.mcf_r	64	<b>160</b>	<b>646</b>	160	645	160	646							
520.omnetpp_r	64	324	259	326	257	<b>326</b>	<b>258</b>							
523.xalancbmk_r	64	83.7	808	84.4	801	<b>84.1</b>	<b>804</b>							
525.x264_r	64	145	776	<b>144</b>	<b>776</b>	144	776							
531.deepsjeng_r	64	258	284	258	284	<b>258</b>	<b>284</b>							
541.leela_r	64	399	266	399	266	<b>399</b>	<b>266</b>							
548.exchange2_r	64	202	831	<b>202</b>	<b>832</b>	202	832							
557.xz_r	64	402	172	407	170	<b>405</b>	<b>171</b>							

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/Benchmark/speccpu/lib/intel64:/home/Benchmark/speccpu/lib/ia32:/home/Benchmark/speccpu/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M7, Intel Xeon Gold 6434H, 3.70GHz

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2023  
**Hardware Availability:** Jun-2023  
**Software Availability:** Dec-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
DCU Streamer Prefetcher = Disabled  
Package C State limit = C0  
LLC Dead Line Alloc = Disabled  
CPU Performance Boost = Aggressive  
SNC (Sub NUMA) = Enable SNC2  
FAN Control = Full

Sysinfo program /home/Benchmark/speccpu/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Apr 25 22:31:44 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M7, Intel Xeon Gold 6434H,  
3.70GHz

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2023  
**Hardware Availability:** Jun-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

- 
- uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux
  - w  
22:31:44 up 0 min, 1 user, load average: 0.34, 0.09, 0.03  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 22:31 8.00s 1.92s 0.18s /home/Benchmark/ptu-unified/ptu -i 500000  
-filter 0x3f -ts -csv -log -logdir . -logname ptu\_intrate\_SPR\_2017\_withptu\_202304252231
  - Username  
From environment variable \$USER: root
  - ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 8254138  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 8254138  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited
  - sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base --output\_format all --nopower --runmode  
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/Benchmark/speccpu
  - /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6434H  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0xab000160

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M7, Intel Xeon Gold 6434H, 3.70GHz

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2023  
**Hardware Availability:** Jun-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
bugs          : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores     : 8
siblings      : 16
4 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 2: core ids 0-7
physical id 3: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 128-143
physical id 2: apicids 256-271
physical id 3: apicids 384-399
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Gold 6434H
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):             4
Stepping:              8
CPU max MHz:           4100.0000
CPU min MHz:           800.0000
BogoMIPS:              7400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             1.5 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              64 MiB (32 instances)
L3 cache:              90 MiB (4 instances)
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M7, Intel Xeon Gold 6434H, 3.70GHz

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2023  
**Hardware Availability:** Jun-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

NUMA node(s): 8
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
NUMA node7 CPU(s): 28-31,60-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	22.5M	90M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-3,32-35
node 0 size: 257626 MB
node 0 free: 256871 MB
node 1 cpus: 4-7,36-39
node 1 size: 258045 MB
node 1 free: 257799 MB
node 2 cpus: 8-11,40-43
node 2 size: 258045 MB
node 2 free: 257784 MB
node 3 cpus: 12-15,44-47
node 3 size: 258045 MB
node 3 free: 257858 MB
node 4 cpus: 16-19,48-51
node 4 size: 258045 MB
node 4 free: 257854 MB
node 5 cpus: 20-23,52-55
node 5 size: 258045 MB
node 5 free: 257868 MB
node 6 cpus: 24-27,56-59
node 6 size: 258045 MB
node 6 free: 257888 MB
node 7 cpus: 28-31,60-63
node 7 size: 257658 MB
node 7 free: 257489 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  21  21  21  21  21  21
1:  12  10  21  21  21  21  21  21
2:  21  21  10  12  21  21  21  21
3:  21  21  12  10  21  21  21  21

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M7, Intel Xeon Gold 6434H, 3.70GHz

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

### Platform Notes (Continued)

```

4: 21 21 21 21 10 12 21 21
5: 21 21 21 21 12 10 21 21
6: 21 21 21 21 21 21 10 12
7: 21 21 21 21 21 21 12 10

```

```

9. /proc/meminfo
   MemTotal:      2113084280 kB

```

```

10. who -r
    run-level 3 Apr 25 22:31

```

```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target   Status
    multi-user       degraded

```

```

12. Failed units, from systemctl list-units --state=failed
    UNIT          LOAD ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

```

13. Services, from systemctl list-unit-files
    STATE          UNIT FILES
enabled           YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@
                 haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor
                 nscd postfix purge-kernels rollback rsyslog sep5 smartd sshd wicked wickedd-auto4
                 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime   systemd-remount-fs
disabled          accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
                 bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
                 cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once
                 haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiui issue-add-ssh-keys kexec-load
                 lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rdisc rpcbind
                 rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                 speech-dispatcherd sysstat systemd-boot-check-no-failures systemd-network-generator
                 systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2 upower
indirect          wickedd

```

```

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=9e2670af-d584-4578-97c8-36df0cfc1166
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=324M,high
crashkernel=72M,low

```

```

15. cpupower frequency-info
    analyzing CPU 0:
      current policy: frequency should be within 800 MHz and 4.10 GHz.
                     The governor "powersave" may decide which speed to use
                     within this range.
    boost state support:
      Supported: yes

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M7, Intel Xeon Gold 6434H, 3.70GHz

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

### Platform Notes (Continued)

Active: yes

```

-----
16. sysctl
kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio     1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              60
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       0

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

-----
20. Disk information
SPEC is set to: /home/Benchmark/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   1.8T  79G  1.7T   5% /

-----
21. /sys/devices/virtual/dmi/id
Vendor:          FUJITSU
Product:         PRIMERGY RX4770 M7
Product Family:  SERVER
Serial:          EWCDXXXXXX

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M7, Intel Xeon Gold 6434H, 3.70GHz

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2023  
**Hardware Availability:** Jun-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

### 22. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

2x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800  
19x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800  
11x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: FUJITSU  
BIOS Version: V1.0.0.0 R0.26.0 for D3984-Alx  
BIOS Date: 01/13/2023  
BIOS Revision: 0.26  
Firmware Revision: 2.20

## Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 548.exchange2\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

### C benchmarks:

icx

### C++ benchmarks:

icpx

### Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M7, Intel Xeon Gold 6434H, 3.70GHz

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2023  
**Hardware Availability:** Jun-2023  
**Software Availability:** Dec-2022

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

### C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M7, Intel Xeon Gold 6434H,  
3.70GHz

SPECrate®2017\_int\_base = 399

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Apr-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-25 09:31:43-0400.

Report generated on 2024-01-29 17:58:19 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.