



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

## NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

CPU2017 License: 3358


Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

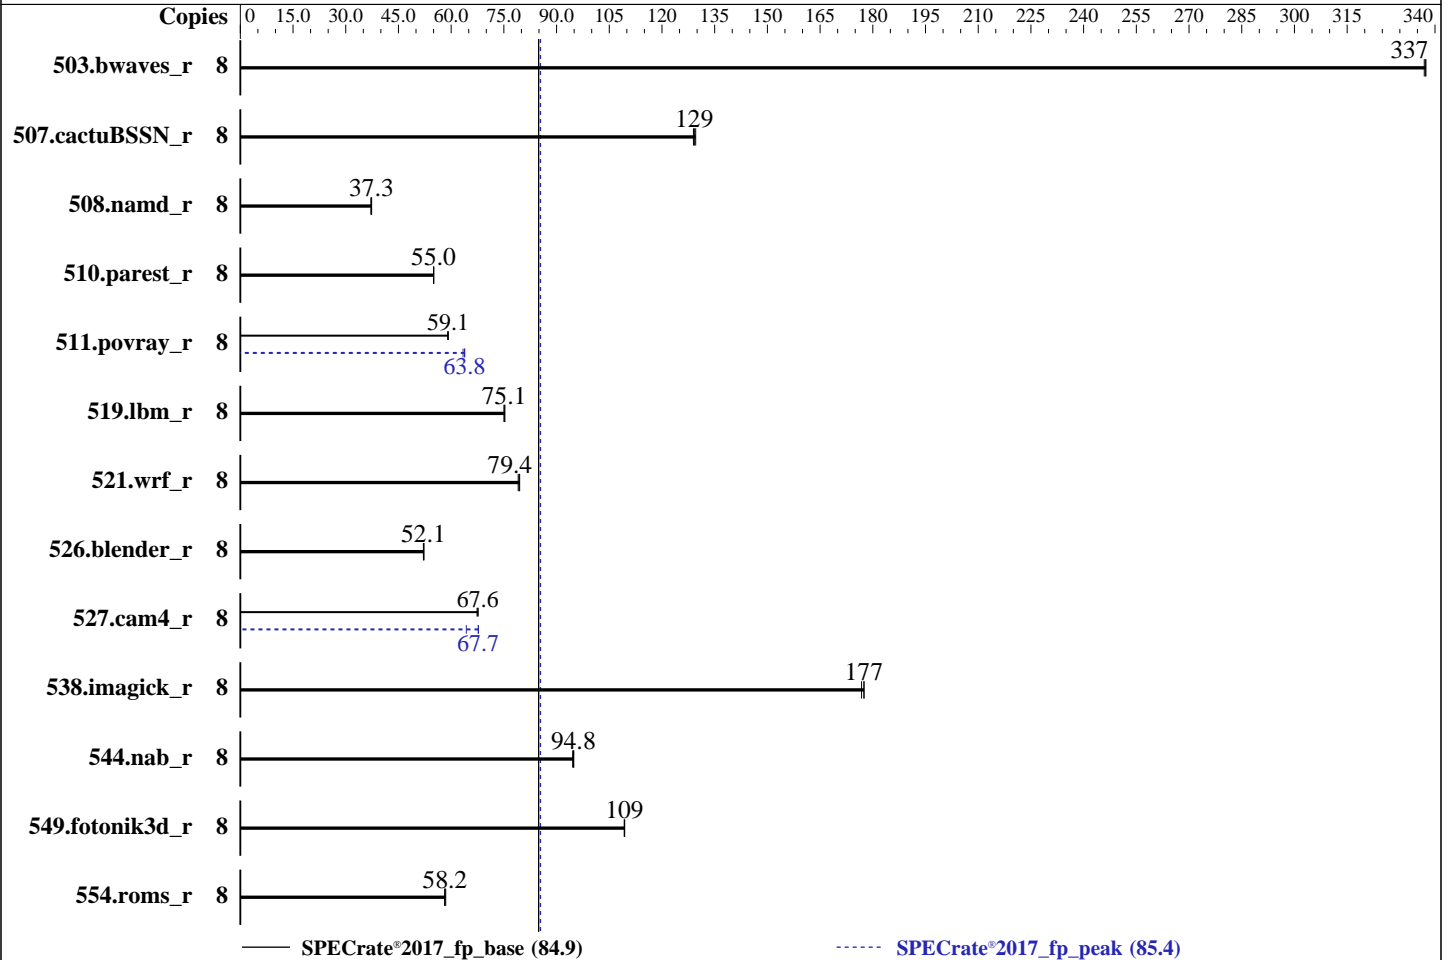

### Hardware

CPU Name: Intel Xeon Bronze 3508U  
 Max MHz: 2200  
 Nominal: 2100  
 Enabled: 8 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 22.5 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)  
 Storage: 1 x 1.92 TB NVME SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2024.0.2 of Intel Fortran  
 Compiler for Linux;  
 Parallel: No  
 Firmware: Version 05.13.00 released Nov-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost  
 of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

## NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	8	<b>238</b>	<b>337</b>	238	337	238	337	8	<b>238</b>	<b>337</b>	238	337	238	337
507.cactuBSSN_r	8	78.2	130	<b>78.4</b>	<b>129</b>	78.5	129	8	78.2	130	<b>78.4</b>	<b>129</b>	78.5	129
508.namd_r	8	203	37.4	205	37.1	<b>204</b>	<b>37.3</b>	8	203	37.4	205	37.1	<b>204</b>	<b>37.3</b>
510.parest_r	8	<b>380</b>	<b>55.0</b>	381	55.0	380	55.1	8	<b>380</b>	<b>55.0</b>	381	55.0	380	55.1
511.povray_r	8	316	59.0	316	59.2	<b>316</b>	<b>59.1</b>	8	<b>293</b>	<b>63.8</b>	292	63.9	295	63.4
519.lbm_r	8	112	75.3	<b>112</b>	<b>75.1</b>	112	75.1	8	112	75.3	<b>112</b>	<b>75.1</b>	112	75.1
521.wrf_r	8	227	79.1	<b>226</b>	<b>79.4</b>	225	79.5	8	227	79.1	<b>226</b>	<b>79.4</b>	225	79.5
526.blender_r	8	234	52.1	<b>234</b>	<b>52.1</b>	233	52.3	8	234	52.1	<b>234</b>	<b>52.1</b>	233	52.3
527.cam4_r	8	207	67.7	<b>207</b>	<b>67.6</b>	208	67.4	8	<b>207</b>	<b>67.7</b>	218	64.3	206	67.8
538.imagick_r	8	112	177	113	177	<b>112</b>	<b>177</b>	8	112	177	113	177	<b>112</b>	<b>177</b>
544.nab_r	8	142	94.9	<b>142</b>	<b>94.8</b>	142	94.6	8	142	94.9	<b>142</b>	<b>94.8</b>	142	94.6
549.fotonik3d_r	8	285	109	<b>285</b>	<b>109</b>	285	109	8	285	109	<b>285</b>	<b>109</b>	285	109
554.roms_r	8	217	58.5	219	58.2	<b>218</b>	<b>58.2</b>	8	217	58.5	219	58.2	<b>218</b>	<b>58.2</b>

SPECrate®2017\_fp\_base = **84.9**

SPECrate®2017\_fp\_peak = **85.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Mar 26 16:44:04 2024

SUT (System Under Test) info as seen by some common utilities.

### ----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
16:44:04 up 4:55, 1 user, load average: 5.56, 7.45, 7.81  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 11:48 4:48m 2.08s 0.02s sh

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

reportable-ic2024.0.2-lin-sapphirerapids-rate-smt-off-20231213.sh

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2060333
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 2060333
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
sh reportable-ic2024.0.2-lin-sapphirerapids-rate-smt-off-20231213.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=8 -c
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define cores=8 --define physicalfirst --define
invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=8 --configfile
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define cores=8 --define physicalfirst --define
invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower --runmode rate
--tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

```

### 6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) BRONZE 3508U
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode     : 0x2b000461
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 8
siblings      : 8
1 physical ids (chips)
8 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0,2,4,6,8,10,12,14
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

## NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Mar-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

### Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 8
On-line CPU(s) list:   0-7
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) BRONZE 3508U
CPU family:             6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    8
Socket(s):              1
Stepping:               8
CPU max MHz:           2200.0000
CPU min MHz:           800.0000
BogoMIPS:              4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                        tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
                        avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                        sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                        cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
                        avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                        hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 flush_l1d arch_capabilities

L1d cache:             384 KiB (8 instances)
L1i cache:             256 KiB (8 instances)
L2 cache:              16 MiB (8 instances)
L3 cache:              22.5 MiB (1 instance)
NUMA node(s):         2
NUMA node0 CPU(s):    0-3
NUMA node1 CPU(s):    4-7
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBSRB-eIBRS SW
                        sequence
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

## NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Mar-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

### Platform Notes (Continued)

L1d	48K	384K	12 Data	1	64	1	64
L1i	32K	256K	8 Instruction	1	64	1	64
L2	2M	16M	16 Unified	2	2048	1	64
L3	22.5M	22.5M	15 Unified	3	24576	1	64

#### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-3
node 0 size: 257518 MB
node 0 free: 248316 MB
node 1 cpus: 4-7
node 1 size: 257594 MB
node 1 free: 248845 MB
node distances:
node  0  1
  0: 10 12
  1: 12 10

```

#### 9. /proc/meminfo

MemTotal: 527475972 kB

#### 10. who -r

run-level 3 Mar 26 11:48

#### 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

#### 12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix
purge-kernels rollback rsyslog smartd sshd systemd-pstore

enabled-runtime systemd-remount-fs
disabled autofsd autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys kdump
kdump-early kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvme-f-autoconnect
rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@ wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
wickedd

indirect wickedd

```

#### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=0a76fbd6-6541-4f13-928e-2a3caa636f4c
splash=silent
resume=/dev/disk/by-uuid/e6a5bcc3-5591-4cd4-a737-ee6cc3cdc083
mitigations=auto
quiet
security=apparmor
crashkernel=447M,high

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

crashkernel=72M,low

### 14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 800 MHz and 2.20 GHz.

The governor "powersave" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

### 15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

### 16. /sys/kernel/mm/transparent\_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

### 17. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

### 18. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5

### 19. Disk information

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
------------	------	------	------	-------	------	------------

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

/dev/nvme0n1p4 xfs 1.3T 178G 1.1T 15% /home

```

20. /sys/devices/virtual/dmi/id
Vendor:      IEIT
Product:     NF5280-M7-A0-R0-00
Product Family: Not specified
Serial:      000000000

```

```

21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 3x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 4400
 5x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 4400

```

```

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:   American Megatrends International, LLC.
BIOS Version:  05.13.00
BIOS Date:     11/30/2023

```

## Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Base Portability Flags (Continued)

```

519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using Fortran, C, and C++:

```

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

```
527.cam4_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.0.html>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 84.9

NF5280M7 (Intel Xeon Bronze 3508U)

SPECrate®2017\_fp\_peak = 85.4

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Mar-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-26 16:44:04-0400.

Report generated on 2024-05-07 22:15:23 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-07.