



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

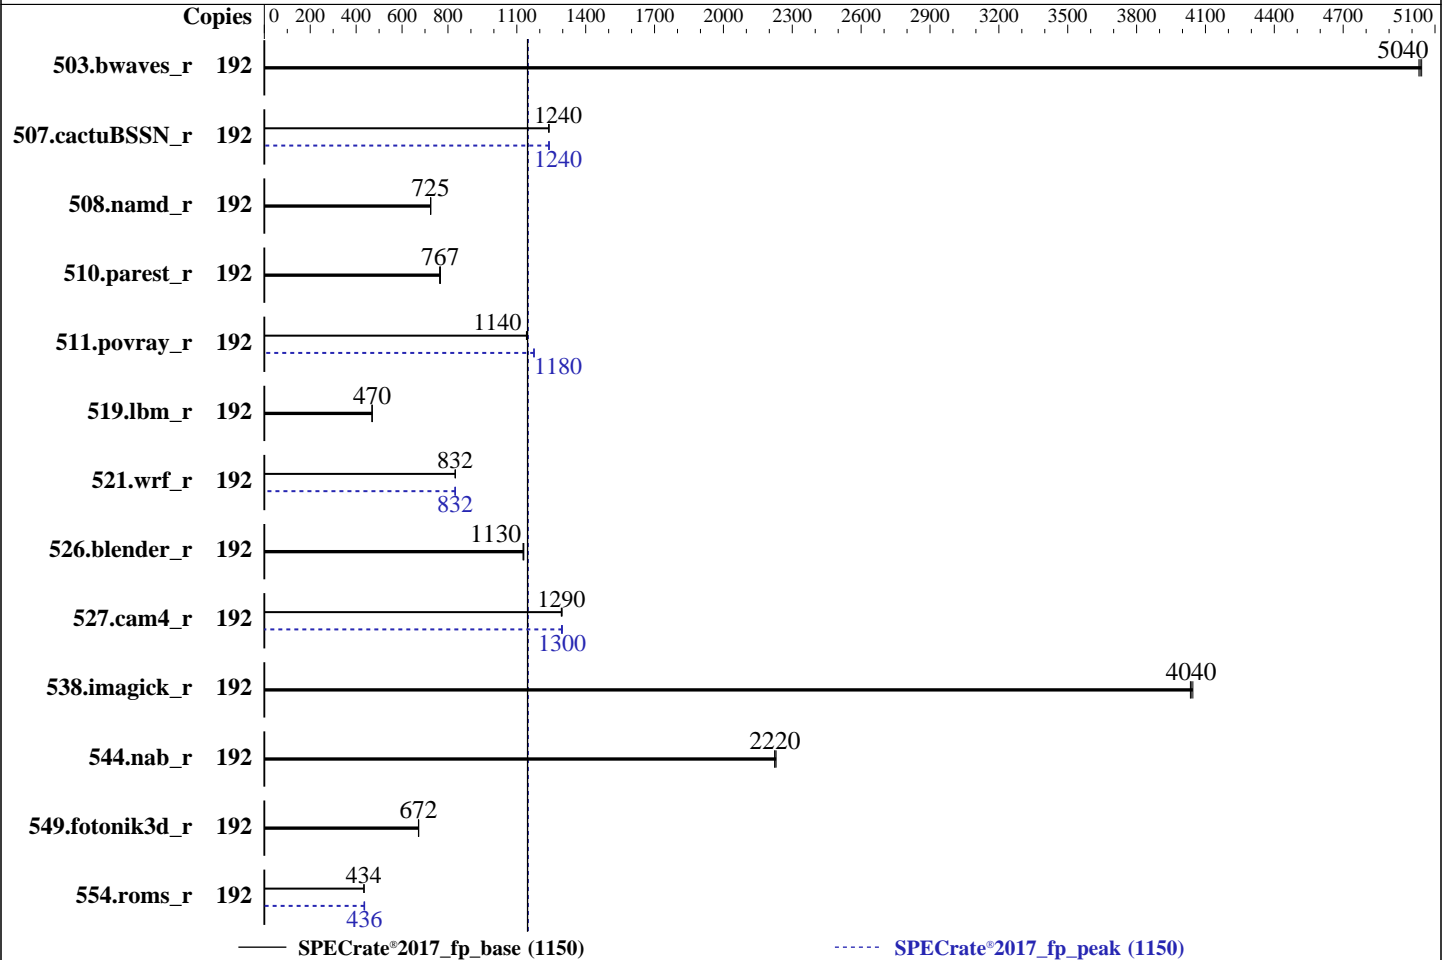

Hardware

CPU Name: Intel Xeon Platinum 8558P
 Max MHz: 4000
 Nominal: 2700
 Enabled: 96 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 260 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R)
 Storage: 1 x 1.92 TB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 01.01.03.05 Released Apr-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	382	5040	<u>382</u>	<u>5040</u>	383	5030	192	382	5040	<u>382</u>	<u>5040</u>	383	5030
507.cactuBSSN_r	192	<u>196</u>	<u>1240</u>	196	1240	196	1240	192	196	1240	<u>196</u>	<u>1240</u>	196	1240
508.namd_r	192	252	725	252	724	<u>252</u>	<u>725</u>	192	252	725	252	724	<u>252</u>	<u>725</u>
510.parest_r	192	<u>655</u>	<u>767</u>	655	767	658	764	192	<u>655</u>	<u>767</u>	655	767	658	764
511.povray_r	192	392	1140	393	1140	<u>392</u>	<u>1140</u>	192	382	1170	381	1180	<u>381</u>	<u>1180</u>
519.lbm_r	192	431	470	<u>431</u>	<u>470</u>	431	469	192	431	470	<u>431</u>	<u>470</u>	431	469
521.wrf_r	192	<u>517</u>	<u>832</u>	517	832	517	832	192	518	830	<u>517</u>	<u>832</u>	517	833
526.blender_r	192	259	1130	259	1130	<u>259</u>	<u>1130</u>	192	259	1130	259	1130	<u>259</u>	<u>1130</u>
527.cam4_r	192	259	1300	<u>259</u>	<u>1290</u>	260	1290	192	259	1290	<u>259</u>	<u>1300</u>	259	1300
538.imagick_r	192	<u>118</u>	<u>4040</u>	118	4030	118	4050	192	<u>118</u>	<u>4040</u>	118	4030	118	4050
544.nab_r	192	145	2220	<u>145</u>	<u>2220</u>	145	2230	192	145	2220	<u>145</u>	<u>2220</u>	145	2230
549.fotonik3d_r	192	<u>1113</u>	<u>672</u>	1114	671	1113	672	192	<u>1113</u>	<u>672</u>	1114	671	1113	672
554.roms_r	192	703	434	702	434	<u>703</u>	<u>434</u>	192	<u>700</u>	<u>436</u>	698	437	702	434

SPECrate®2017_fp_base = 1150

SPECrate®2017_fp_peak = 1150

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-191

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Uniautos/speccpu2017/lib/intel64:/home/Uniautos/speccpu2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /home/Uniautos/speccpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed May 22 23:42:08 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.el9_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT 2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
23:42:08 up 5:35, 2 users, load average: 136.14, 178.67, 186.15
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
root      tty1      18:18    5:23m  1.34s  0.07s  -bash
root      pts/0     18:13    5:11m  0.06s  0.06s  -bash
```

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2060063
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2060063
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 192 -c ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg
--define smt-on --define cores=96 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak -o all fprate
runcpu --define default-platform-flags --copies 192 --configfile
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.023/templogs/preenv.fprate.023.0.log --lognum 023.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/Uniautos/speccpu2017

6. /proc/cpuinfo
model name : INTEL(R) XEON(R) PLATINUM 8558P
vendor_id : GenuineIntel
cpu family : 6
model : 207
stepping : 2
microcode : 0x21000200
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores : 48
siblings : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 1: apicids 128-223

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:  0-191
Vendor ID:             GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:            INTEL(R) XEON(R) PLATINUM 8558P
BIOS Model name:      INTEL(R) XEON(R) PLATINUM 8558P
CPU family:            6
Model:                 207
Thread(s) per core:    2
Core(s) per socket:   48
Socket(s):             2
Stepping:              2
BogoMIPS:              5400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                      vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
                      ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                      rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                      avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                      cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd
                      dtherm ida arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                      gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                      rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                      serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                      amx_int8 flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             4.5 MiB (96 instances)
L1i cache:             3 MiB (96 instances)
L2 cache:              192 MiB (96 instances)
L3 cache:              520 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-23,96-119
NUMA node1 CPU(s):    24-47,120-143
NUMA node2 CPU(s):    48-71,144-167
NUMA node3 CPU(s):    72-95,168-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	260M	520M	20	Unified	3	212992	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-23,96-119
node 0 size: 128031 MB
node 0 free: 99405 MB
node 1 cpus: 24-47,120-143
node 1 size: 129013 MB
node 1 free: 110274 MB
node 2 cpus: 48-71,144-167
node 2 size: 129013 MB
node 2 free: 110234 MB
node 3 cpus: 72-95,168-191
node 3 size: 128999 MB
node 3 free: 106945 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527419864 kB

10. who -r

run-level 3 May 22 18:07

11. Systemd service manager version: systemd 252 (252-13.el9_2)

```

Default Target Status
multi-user      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* dnf-makecache.service             loaded failed failed dnf makecache
* sep5.service                       loaded failed failed systemd script to load sep5 driver at boot time

```

13. Services, from systemctl list-unit-files

```

STATE      UNIT FILES
enabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
           dbus-broker getty@ insights-client-boot irqbalance kdump lvm2-monitor mdmonitor microcode
           nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

systemd-boot-update systemd-network-generator tuned udisks2
enabled-runtime systemd-remount-fs
disabled blk-availability console-getty cpupower debug-shell dnf-system-upgrade firewalld kvm_stat
man-db-restart-cache-update nftables rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
systemd-pstore systemd-sysex
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
nohz_full=1-191

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
16. tuned-adm active
Current active profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs    60000
   defrag                    1
   max_ptes_none            511
   max_ptes_shared          256
   max_ptes_swap            64
   pages_to_scan            4096
   scan_sleep_millisecs     10000
-----
```

```
-----
20. OS release
   From /etc/*-release /etc/*-version
   os-release      Red Hat Enterprise Linux 9.2 (Plow)
   redhat-release  Red Hat Enterprise Linux release 9.2 (Plow)
   system-release  Red Hat Enterprise Linux release 9.2 (Plow)
-----
```

```
-----
21. Disk information
   SPEC is set to: /home/Uniautos/speccpu2017
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   1.7T  148G  1.6T   9% /home
-----
```

```
-----
22. /sys/devices/virtual/dmi/id
   Vendor:      XFUSION
   Product:     2288H V7
   Product Family: Eagle Stream
   Serial:      2106182101X3N8000001
-----
```

```
-----
23. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     8x Hynix HMC88AGBRA190N 32 GB 2 rank 5600
     8x Hynix HMC88AGBRA191N 32 GB 2 rank 5600
-----
```

```
-----
24. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      XFUSION
   BIOS Version:     01.01.03.05
   BIOS Date:        04/12/2024
   BIOS Revision:    3.5
-----
```

Compiler Version Notes

```
-----
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 1150

FusionServer 2288H V7 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_peak = 1150

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-05-22 11:42:07-0400.

Report generated on 2024-06-24 10:36:31 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-18.