



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

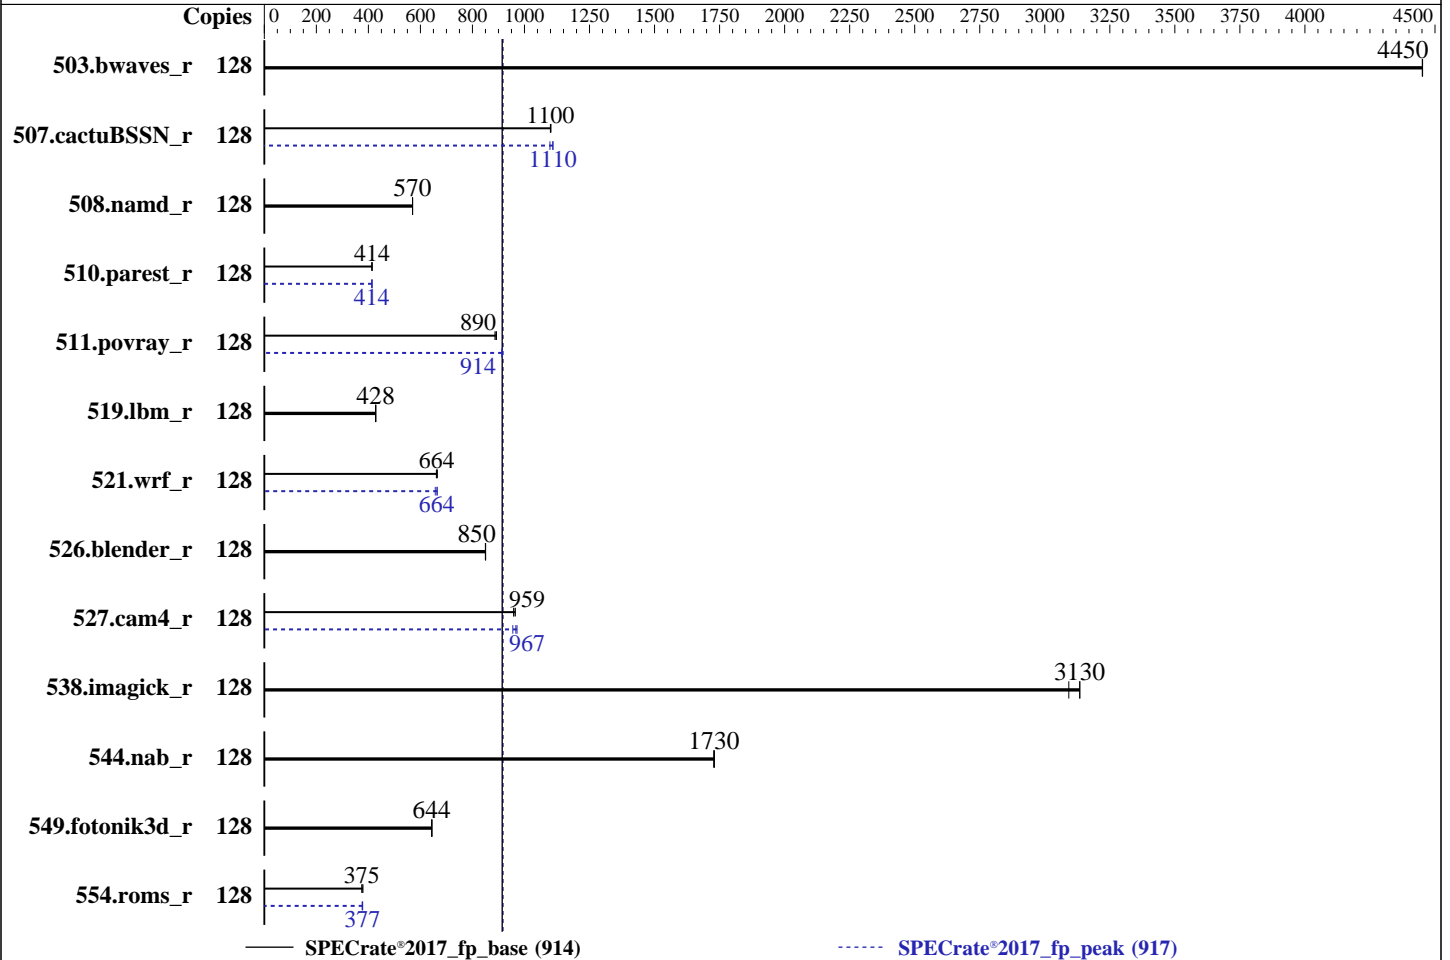

### Hardware

CPU Name: Intel Xeon Platinum 8562Y+  
 Max MHz: 4100  
 Nominal: 2800  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.2 (Plow)  
 5.14.0-284.11.1.el9\_2.x86\_64  
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2024.0.2 of Intel Fortran  
 Compiler for Linux;  
 Parallel: No  
 Firmware: Version 01.01.03.05 Released Apr-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: May-2024  
Hardware Availability: Dec-2023  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<u>288</u>	<u>4450</u>	288	4450	288	4450	128	<u>288</u>	<u>4450</u>	288	4450	288	4450
507.cactuBSSN_r	128	147	1100	<u>147</u>	<u>1100</u>	147	1100	128	148	1100	146	1110	<u>146</u>	<u>1110</u>
508.namd_r	128	213	570	213	570	<u>213</u>	<u>570</u>	128	213	570	213	570	<u>213</u>	<u>570</u>
510.parest_r	128	<u>809</u>	<u>414</u>	808	414	810	413	128	811	413	<u>810</u>	<u>414</u>	809	414
511.povray_r	128	337	887	<u>336</u>	<u>890</u>	335	892	128	<u>327</u>	<u>914</u>	327	914	327	914
519.lbm_r	128	315	428	<u>315</u>	<u>428</u>	315	428	128	315	428	<u>315</u>	<u>428</u>	315	428
521.wrf_r	128	434	661	<u>432</u>	<u>664</u>	431	665	128	<u>432</u>	<u>664</u>	436	657	431	665
526.blender_r	128	229	850	<u>229</u>	<u>850</u>	229	851	128	229	850	<u>229</u>	<u>850</u>	229	851
527.cam4_r	128	234	958	<u>233</u>	<u>959</u>	232	965	128	234	955	230	971	<u>232</u>	<u>967</u>
538.imagick_r	128	103	3090	<u>102</u>	<u>3130</u>	102	3130	128	103	3090	<u>102</u>	<u>3130</u>	102	3130
544.nab_r	128	<u>125</u>	<u>1730</u>	125	1730	125	1730	128	<u>125</u>	<u>1730</u>	125	1730	125	1730
549.fotonik3d_r	128	774	644	<u>775</u>	<u>644</u>	775	644	128	774	644	<u>775</u>	<u>644</u>	775	644
554.roms_r	128	536	379	542	375	<u>542</u>	<u>375</u>	128	538	378	540	376	<u>540</u>	<u>377</u>

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 917

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Uniautos/speccpu2017/lib/intel64:/home/Uniautos/speccpu2017/je5.0.1-64"  
MALLOCONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /home/Uniautos/speccpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Tue May 28 22:44:07 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19\_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-284.11.1.e19\_2.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 12 10:45:03 EDT 2023 x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
22:44:07 up 4:43, 2 users, load average: 77.67, 115.62, 122.97  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 18:03 4:40m 1.13s 0.06s -bash

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
root pts/1 18:01 4:40m 0.03s 0.03s -bash
```

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2060154
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2060154
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 128 -c ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg
--define smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak -o all fprate
runcpu --define default-platform-flags --copies 128 --configfile
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.044/templogs/preenv.fprate.044.0.log --lognum 044.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/speccpu2017
```

-----  
6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) PLATINUM 8562Y+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping      : 2
microcode     : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            INTEL(R) XEON(R) PLATINUM 8562Y+
BIOS Model name:      INTEL(R) XEON(R) PLATINUM 8562Y+
CPU family:            6
Model:                 207
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             2
Stepping:              2
BogoMIPS:              5600.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                      vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
                      ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                      rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                      avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                      cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd
                      dtherm ida arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                      gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                      rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                      serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                      amx_int8 flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-15,64-79
NUMA node1 CPU(s):    16-31,80-95
NUMA node2 CPU(s):    32-47,96-111
NUMA node3 CPU(s):    48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

sequence  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K		3M	12 Data	1	64	1	64
L1i	32K		2M	8 Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 128074 MB
node 0 free: 106924 MB
node 1 cpus: 16-31,80-95
node 1 size: 129016 MB
node 1 free: 115627 MB
node 2 cpus: 32-47,96-111
node 2 size: 128977 MB
node 2 free: 113454 MB
node 3 cpus: 48-63,112-127
node 3 size: 129012 MB
node 3 free: 115770 MB
node distances:
node  0  1  2  3
  0: 10 12 21 21
  1: 12 10 21 21
  2: 21 21 10 12
  3: 21 21 12 10

```

9. /proc/meminfo

MemTotal: 527443192 kB

10. who -r

run-level 3 May 28 18:00

11. Systemd service manager version: systemd 252 (252-13.el9\_2)

```

Default Target Status
multi-user      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD ACTIVE SUB DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

13. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker getty@ insights-client-boot irqbalance kdump lvm2-monitor mdmonitor microcode
nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd
systemd-boot-update systemd-network-generator tuned udisks2
enabled-runtime systemd-remount-fs

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

disabled blk-availability console-getty cpupower debug-shell dnf-system-upgrade firewalld kvm\_stat  
man-db-restart-cache-update nftables rdisc rhcd rhsm rhsm-facts rpmdb-rebuild  
selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures  
systemd-pstore systemd-sysex  
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate  
systemd-sysupdate-reboot

-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9\_2.x86\_64  
root=/dev/mapper/rhel-root  
ro  
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap

-----  
15. cpupower frequency-info  
analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

-----  
16. tuned-adm active  
Current active profile: throughput-performance

-----  
17. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 40  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 10  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
18. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled [always] madvice never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
19. /sys/kernel/mm/transparent\_hugepage/khugepaged

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

```
-----
20. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)
-----
```

```
-----
21. Disk information
SPEC is set to: /home/Uniautos/speccpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 1.7T 177G 1.5T 11% /home
-----
```

```
-----
22. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 2288H V7
Product Family: Eagle Stream
Serial: 2106182101X3N8000001
-----
```

```
-----
23. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
8x Hynix HMC88AGBRA190N 32 GB 2 rank 5600
8x Hynix HMC88AGBRA191N 32 GB 2 rank 5600
-----
```

```
-----
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 01.01.03.05
BIOS Date: 04/12/2024
BIOS Revision: 3.5
-----
```

### Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 914

FusionServer 2288H V7 (Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_peak = 917

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**Test Date:** May-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

511.povray\_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-05-28 10:44:07-0400.

Report generated on 2024-06-24 10:37:39 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-18.