



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion


FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

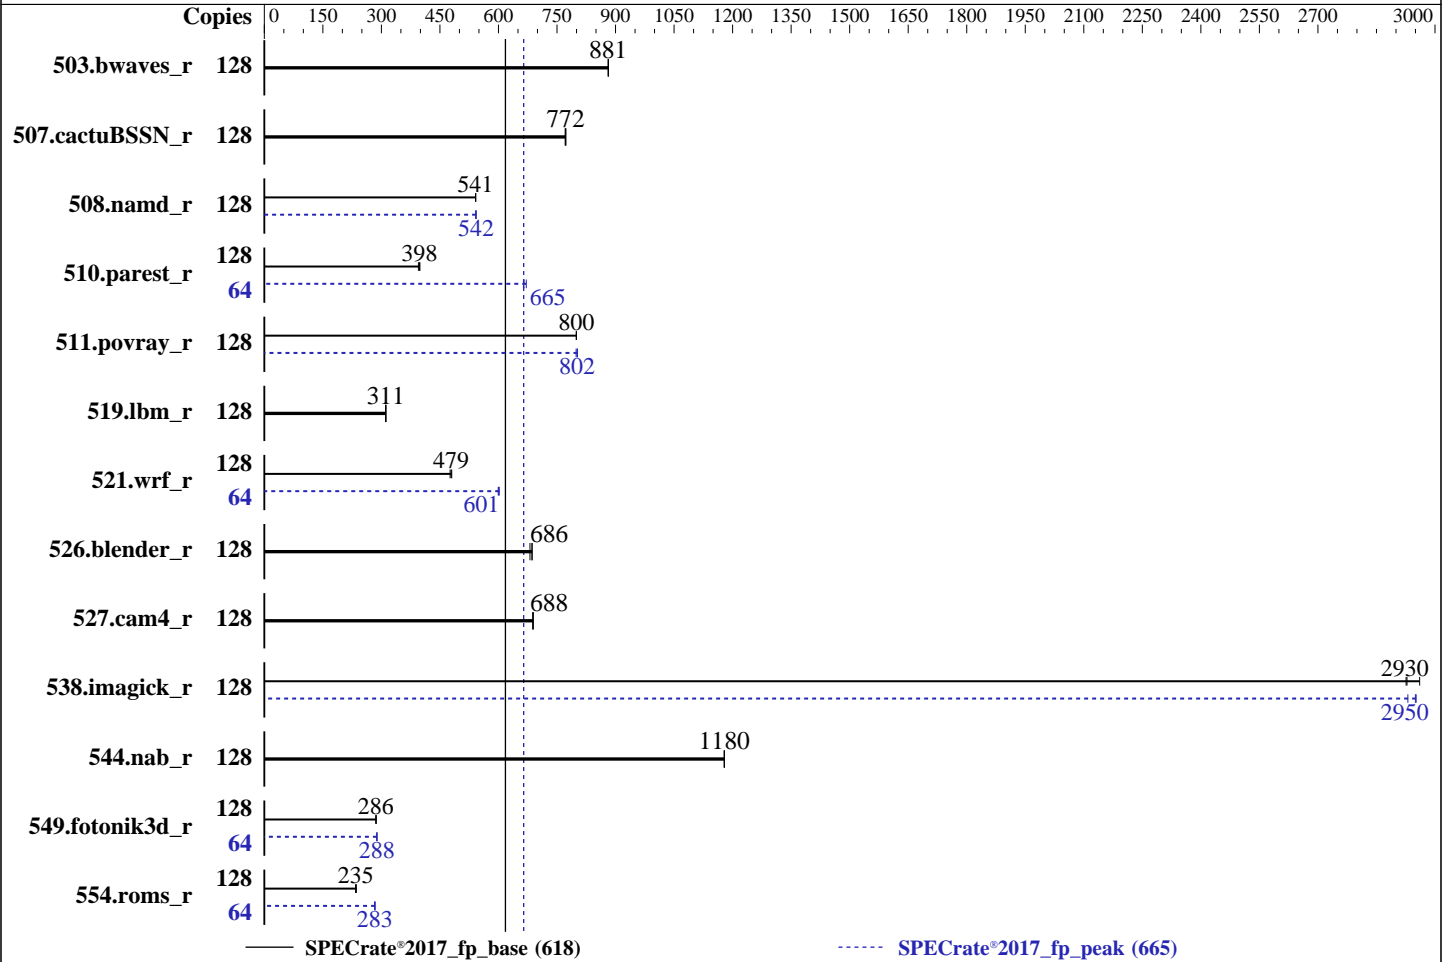

Hardware

CPU Name: AMD EPYC 9554
Max MHz: 3750
Nominal: 3100
Enabled: 64 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 480 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
5.14.0-70.13.1.el9_0.x86_64
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
Parallel: No
Firmware: Version 2.09.11 released Jun-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|-------------|------------|------------|-------------|-------------|------------|--------|---------|-------|------------|-------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 128 | 1457 | 881 | 1455 | 882 | <u>1457</u> | <u>881</u> | 128 | 1457 | 881 | 1455 | 882 | <u>1457</u> | <u>881</u> |
| 507.cactuBSSN_r | 128 | 210 | 773 | <u>210</u> | <u>772</u> | 210 | 771 | 128 | 210 | 773 | <u>210</u> | <u>772</u> | 210 | 771 |
| 508.namd_r | 128 | 225 | 542 | <u>225</u> | <u>541</u> | 225 | 541 | 128 | 224 | 543 | <u>224</u> | <u>542</u> | 224 | 542 |
| 510.parest_r | 128 | 840 | 398 | 848 | 395 | <u>841</u> | <u>398</u> | 64 | 252 | 664 | <u>252</u> | <u>665</u> | 249 | 671 |
| 511.povray_r | 128 | 374 | 799 | 374 | 800 | <u>374</u> | <u>800</u> | 128 | 374 | 799 | <u>373</u> | <u>802</u> | 372 | 802 |
| 519.lbm_r | 128 | 433 | 312 | <u>433</u> | <u>311</u> | 434 | 311 | 128 | 433 | 312 | <u>433</u> | <u>311</u> | 434 | 311 |
| 521.wrf_r | 128 | 597 | 480 | 602 | 476 | <u>599</u> | <u>479</u> | 64 | 239 | 599 | 238 | 602 | <u>239</u> | <u>601</u> |
| 526.blender_r | 128 | 286 | 681 | 284 | 686 | <u>284</u> | <u>686</u> | 128 | 286 | 681 | 284 | 686 | <u>284</u> | <u>686</u> |
| 527.cam4_r | 128 | 325 | 689 | <u>325</u> | <u>688</u> | 325 | 688 | 128 | 325 | 689 | <u>325</u> | <u>688</u> | 325 | 688 |
| 538.imagick_r | 128 | 108 | 2960 | <u>109</u> | <u>2930</u> | 109 | 2930 | 128 | 108 | 2950 | 109 | 2930 | <u>108</u> | <u>2950</u> |
| 544.nab_r | 128 | 183 | 1180 | <u>183</u> | <u>1180</u> | 183 | 1180 | 128 | 183 | 1180 | <u>183</u> | <u>1180</u> | 183 | 1180 |
| 549.fotonik3d_r | 128 | <u>1744</u> | <u>286</u> | 1740 | 287 | 1745 | 286 | 64 | 865 | 288 | <u>865</u> | <u>288</u> | 865 | 288 |
| 554.roms_r | 128 | 869 | 234 | <u>867</u> | <u>235</u> | 863 | 236 | 64 | 358 | 284 | 360 | 283 | <u>359</u> | <u>283</u> |

SPECrate®2017_fp_base = **618**

SPECrate®2017_fp_peak = **665**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/cpu2017/amd_rate_aocc400_znver4_A_lib/lib:/cpu2017/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

Determinism Control = Manual
Determinism Enable = Power
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400
NUMA Nodes Per Socket = NPS4

Sysinfo program /cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sat Jul 6 03:22:04 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```

14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

```

```

-----
2. w
03:22:04 up 2:32, 2 users, load average: 0.45, 27.15, 77.10
USER  TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root  pts/0    01:06   1:15m  0.06s  0.06s  -bash
root  pts/1    02:42   12.00s 1.03s  0.05s  -bash

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3094757
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3094757
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/1
-bash
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```
$SPEC/tmp/CPU2017.028/templogs/preenv.fprate.028.0.log --lognum 028.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9554 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 64
siblings       : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 0: apicids 0-127
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9554 64-Core Processor
BIOS Model name:      AMD EPYC 9554 64-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):              1
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3762.9880
CPU min MHz:           1500.0000
BogoMIPS:              6190.40
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                      pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                      abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                      perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                      invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                      avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                      avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                      svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Platform Notes (Continued)

pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
AMD-V

```

Virtualization:
L1d cache:      2 MiB (64 instances)
L1i cache:      2 MiB (64 instances)
L2 cache:       64 MiB (64 instances)
L3 cache:       256 MiB (8 instances)
NUMA node(s):   4
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 32K | 2M | 8 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 2M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 1M | 64M | 8 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 32M | 256M | 16 | Unified | 3 | 32768 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 95926 MB
node 0 free: 94968 MB
node 1 cpus: 16-31,80-95
node 1 size: 96761 MB
node 1 free: 96020 MB
node 2 cpus: 32-47,96-111
node 2 size: 96724 MB
node 2 free: 95970 MB
node 3 cpus: 48-63,112-127
node 3 size: 96712 MB
node 3 free: 95930 MB
node distances:
node  0  1  2  3
0:  10  12  12  12
1:  12  10  12  12
2:  12  12  10  12
3:  12  12  12  10

```

9. /proc/meminfo

MemTotal: 395391788 kB

10. who -r

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Platform Notes (Continued)

run-level 3 Jul 6 00:49

11. Systemd service manager version: systemd 250 (250-6.el9_0)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
                dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd
                rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2
enabled-runtime systemd-remount-fs
disabled       console-getty cpupower debug-shell hwloc-dump-hwdata kvm_stat man-db-restart-cache-update
                nftables rdisc rhsm rhsm-facts rpmbd-rebuild serial-getty@ sshd-keygen@
                systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,msdos2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=UUID=10976966-ea39-4bac-9efc-bf882faaa099
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=a11e21b6-41a7-47ed-890c-9fb71934ef79
nohz_full=1-127
```

14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 3.10 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 3100MHz
```

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```

vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
20. Disk information
SPEC is set to: /cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   150G  7.6G  143G   6% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Product:        1158H V7
Product Family: Genoa

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  12x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:    INSYDE Corp.
BIOS Version:   2.09.11
BIOS Date:      06/14/2024
BIOS Revision:  2.9

```




SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Peak Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

```
538.imagick_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

544.nab_r: basepeak = yes

C++ benchmarks:

```
508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Peak Optimization Flags (Continued)

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

Fortran benchmarks:

```
503.bwaves_r: basepeak = yes
```

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang
```

```
554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

```
527.cam4_r: basepeak = yes
```

Benchmarks using both C and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

Peak Optimization Flags (Continued)

```
511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.1.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1158H V7
(AMD EPYC 9554)

SPECrate®2017_fp_base = 618

SPECrate®2017_fp_peak = 665

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: May-2024
Software Availability: Jun-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-05 15:22:03-0400.
Report generated on 2024-07-30 19:30:42 by CPU2017 PDF formatter v6716.
Originally published on 2024-07-30.