



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

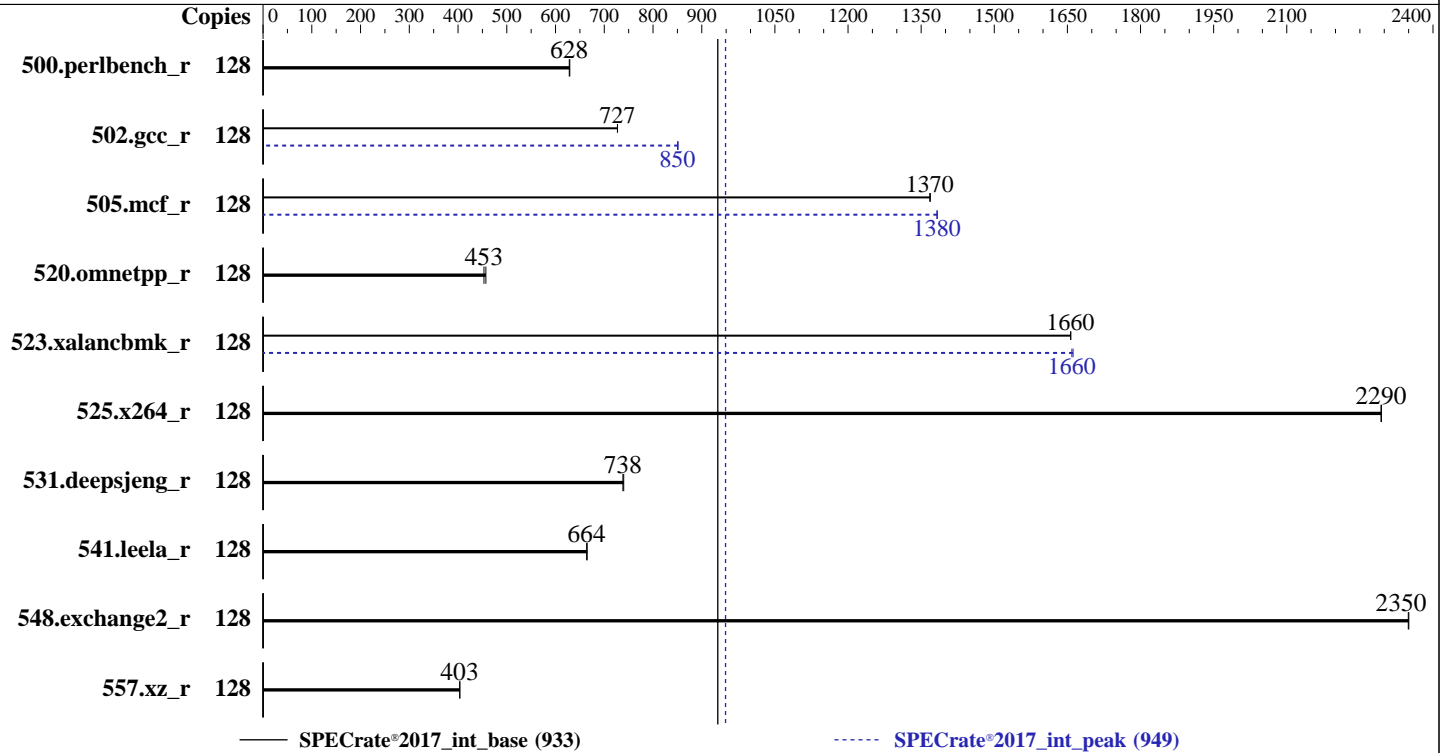

Hardware

CPU Name: AMD EPYC 9355
 Max MHz: 4400
 Nominal: 3550
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
 Storage: 80 GB on tmpfs
 Other: CPU Cooling: DLC

Software

OS: Ubuntu 24.04 LTS
 6.8.0-41-generic
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Version 0.3.3 [X-REV] released Oct-2024
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	324	629	324	628			128	324	629	324	628		
502.gcc_r	128	249	727	249	727			128	213	850	213	852		
505.mcf_r	128	151	1370	151	1370			128	150	1380	150	1380		
520.omnetpp_r	128	367	457	371	453			128	367	457	371	453		
523.xalancbmk_r	128	81.6	1660	81.6	1660			128	81.3	1660	81.5	1660		
525.x264_r	128	97.7	2290	97.7	2290			128	97.7	2290	97.7	2290		
531.deepsjeng_r	128	199	738	198	740			128	199	738	198	740		
541.leela_r	128	319	664	319	665			128	319	664	319	665		
548.exchange2_r	128	143	2350	143	2350			128	143	2350	143	2350		
557.xz_r	128	342	404	343	403			128	342	404	343	403		

SPECrate®2017_int_base = 933

SPECrate®2017_int_peak = 949

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1/amd_rate_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1
.1.9-aocc500-znerv5_A1/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:always"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

DRAM Refresh Delay : Performance

DIMM Self Healing on -

Uncorrectable Memory Error : Disabled

Virtualization Technology : Disabled

NUMA Nodes per Socket : 4

System Profile : Custom

C-States : Disabled

Memory Patrol Scrub : Disabled

PCI ASPM L1 Link -

Power Management : Disabled

Determinism Control : Manual

Determinism Slider : Power Determinism

Optimizer Mode : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on SLR7747-R7725 Thu Oct 24 20:24:27 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Platform Notes (Continued)

- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
-----
1. uname -a
Linux SLR7747-R7725 6.8.0-41-generic #41-Ubuntu SMP PREEMPT_DYNAMIC Fri Aug 2 20:41:06 UTC 2024 x86_64
x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
20:24:27 up 1 min, 1 user, load average: 0.14, 0.03, 0.01
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU WHAT
root      tty1    -             20:23       27.00s     1.22s     0.36s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6189341
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----
```

```
-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_EPYC-5.inc --define
DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.7 --output_format html,pdf,txt
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Platform Notes (Continued)

```
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define DL-BIOS-NPS=4
--define DL-BIOSinc=Dell-BIOS_EPYC-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define
DL-VERS=5.3.7 --output_format html,pdf,txt intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=5.3.7 --output_format html,pdf,txt --nopower --runmode rate --tune
base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9355 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002116
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 1: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu
From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              AuthenticAMD
BIOS Vendor ID:        AMD
Model name:             AMD EPYC 9355 32-Core Processor
BIOS Model name:       AMD EPYC 9355 32-Core Processor
BIOS CPU family:       107
CPU family:             26
Model:                  2
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               1
Frequency boost:       enabled
CPU(s) scaling MHz:    81%
CPU max MHz:           4413.2319
CPU min MHz:           1500.0000
BogoMIPS:               7090.55
CPU @ 3.5GHz
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Platform Notes (Continued)

Flags:

```
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnni
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap
```

```
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBSB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```

node 0 cpus: 0-7,64-71
node 0 size: 192801 MB
node 0 free: 187005 MB
node 1 cpus: 8-15,72-79
node 1 size: 193528 MB
node 1 free: 193223 MB
node 2 cpus: 16-23,80-87
node 2 size: 193528 MB
node 2 free: 193202 MB
node 3 cpus: 24-31,88-95
node 3 size: 193512 MB
node 3 free: 193184 MB
node 4 cpus: 32-39,96-103
node 4 size: 193528 MB
node 4 free: 193229 MB
node 5 cpus: 40-47,104-111
node 5 size: 193528 MB
node 5 free: 193197 MB
node 6 cpus: 48-55,112-119
node 6 size: 193485 MB
node 6 free: 193137 MB
node 7 cpus: 56-63,120-127
node 7 size: 193493 MB
node 7 free: 193142 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1584544108 kB

```

```

-----
10. who -r
    run-level 3 Oct 24 20:23

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-lubuntu8)
    Default Target Status
    multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd
networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```

indirect      systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
masked        systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
              systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
              systemd-time-wait-sync upower
              systemd-sysupdate systemd-sysupdate-reboot uidd
              cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-41-generic
root=UUID=646610b2-1524-4713-b470-eb06f7216655
ro

```

```

-----
14. cpupower frequency-info
analyzing CPU 119:
  current policy: frequency should be within 1.50 GHz and 3.55 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 19800MHz

```

```

-----
15. tuned-adm active
    Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04 LTS

20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 80G 3.3G 77G 5% /mnt/ramdisk

21. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R7725
Product Family: PowerEdge
Serial: SLR7747

22. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
24x 802C0000802C MTC40F2046S1RC64BD2 64 GB 2 rank 6400, configured at 6000

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 0.3.3 [X-REV]
BIOS Date: 10/14/2024
BIOS Revision: 0.3

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Compiler Version Notes (Continued)

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

```

C | 502.gcc_r(peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

```

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
  | 557.xz_r(base, peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

```

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
    | 541.leela_r(base, peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

```

Fortran | 548.exchange2_r(base, peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

```

C++ benchmarks:

```

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

```

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 933

PowerEdge R7725 (AMD EPYC 9355 32-Core Processor)

SPECrate®2017_int_peak = 949

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.4.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-24 16:24:26-0400.

Report generated on 2024-11-20 11:06:23 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-19.