



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

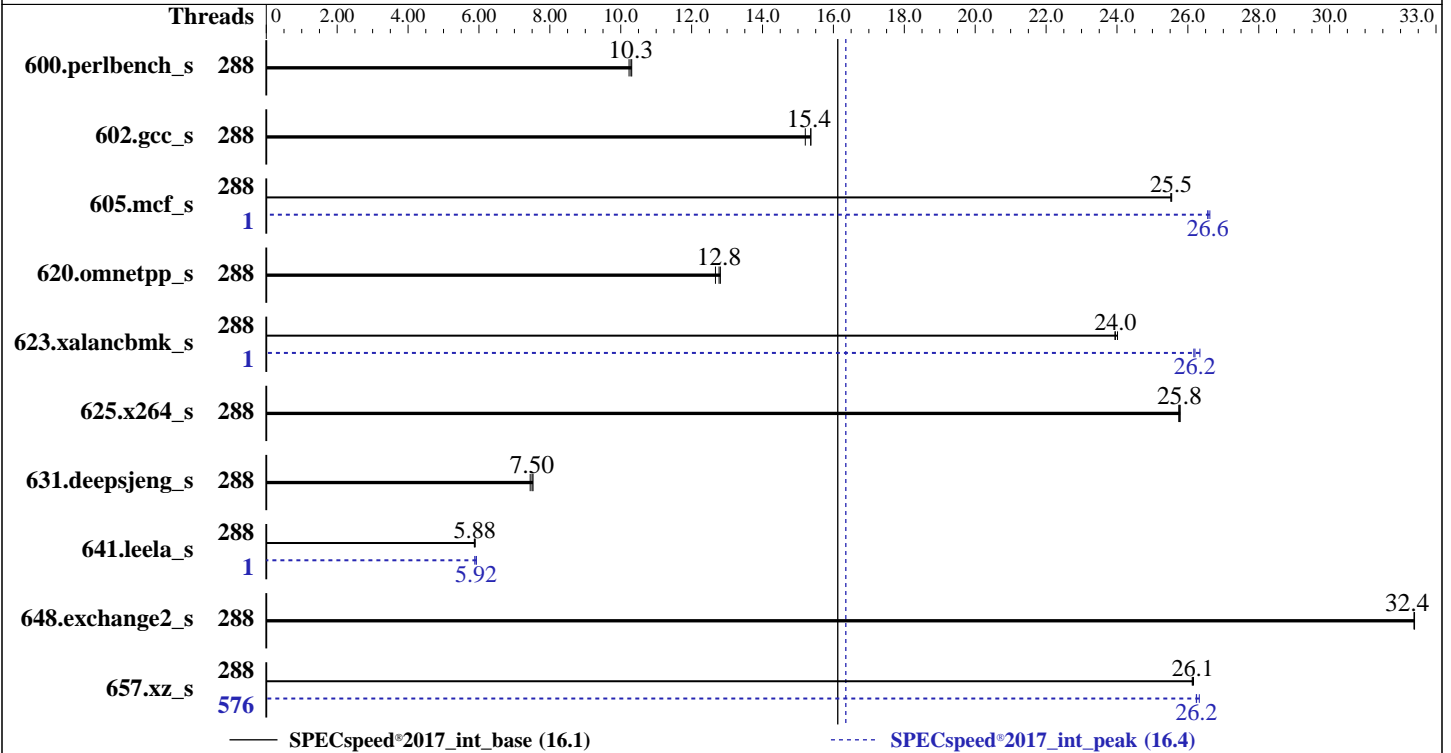

### Hardware

CPU Name: AMD EPYC 9825  
 Max MHz: 3700  
 Nominal: 2200  
 Enabled: 288 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip,  
 32 MB shared / 12 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version KAE131I 5.30 released Dec-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Results Table

| Benchmark       | Base    |                    |                    |                    |                    |                   |                    | Peak    |                    |                    |                    |                    |                   |                    |
|-----------------|---------|--------------------|--------------------|--------------------|--------------------|-------------------|--------------------|---------|--------------------|--------------------|--------------------|--------------------|-------------------|--------------------|
|                 | Threads | Seconds            | Ratio              | Seconds            | Ratio              | Seconds           | Ratio              | Threads | Seconds            | Ratio              | Seconds            | Ratio              | Seconds           | Ratio              |
| 600.perlbench_s | 288     | 172                | 10.3               | <b><u>173</u></b>  | <b><u>10.3</u></b> | 173               | 10.2               | 288     | 172                | 10.3               | <b><u>173</u></b>  | <b><u>10.3</u></b> | 173               | 10.2               |
| 602.gcc_s       | 288     | 262                | 15.2               | <b><u>259</u></b>  | <b><u>15.4</u></b> | 259               | 15.4               | 288     | 262                | 15.2               | <b><u>259</u></b>  | <b><u>15.4</u></b> | 259               | 15.4               |
| 605.mcf_s       | 288     | <b><u>185</u></b>  | <b><u>25.5</u></b> | 185                | 25.5               | 185               | 25.5               | 1       | 178                | 26.6               | 177                | 26.6               | <b><u>178</u></b> | <b><u>26.6</u></b> |
| 620.omnetpp_s   | 288     | 129                | 12.7               | 127                | 12.8               | <b><u>128</u></b> | <b><u>12.8</u></b> | 288     | 129                | 12.7               | 127                | 12.8               | <b><u>128</u></b> | <b><u>12.8</u></b> |
| 623.xalancbmk_s | 288     | 59.0               | 24.0               | <b><u>59.2</u></b> | <b><u>24.0</u></b> | 59.2              | 23.9               | 1       | <b><u>54.1</u></b> | <b><u>26.2</u></b> | 53.8               | 26.3               | 54.2              | 26.2               |
| 625.x264_s      | 288     | 68.5               | 25.7               | <b><u>68.5</u></b> | <b><u>25.8</u></b> | 68.4              | 25.8               | 288     | 68.5               | 25.7               | <b><u>68.5</u></b> | <b><u>25.8</u></b> | 68.4              | 25.8               |
| 631.deepsjeng_s | 288     | <b><u>191</u></b>  | <b><u>7.50</u></b> | 190                | 7.53               | 192               | 7.45               | 288     | <b><u>191</u></b>  | <b><u>7.50</u></b> | 190                | 7.53               | 192               | 7.45               |
| 641.leela_s     | 288     | 291                | 5.87               | <b><u>290</u></b>  | <b><u>5.88</u></b> | 290               | 5.89               | 1       | 288                | 5.93               | <b><u>288</u></b>  | <b><u>5.92</u></b> | 290               | 5.88               |
| 648.exchange2_s | 288     | <b><u>90.8</u></b> | <b><u>32.4</u></b> | 90.8               | 32.4               | 90.8              | 32.4               | 288     | <b><u>90.8</u></b> | <b><u>32.4</u></b> | 90.8               | 32.4               | 90.8              | 32.4               |
| 657.xz_s        | 288     | 237                | 26.1               | 236                | 26.2               | <b><u>237</u></b> | <b><u>26.1</u></b> | 576     | 235                | 26.3               | 236                | 26.2               | <b><u>236</u></b> | <b><u>26.2</u></b> |

SPECspeed®2017\_int\_base = **16.1**

SPECspeed®2017\_int\_peak = **16.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

### Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

### Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

cpupower set to performance mode  
cpupower frequency-set -r -g performance  
To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-575"

LD\_LIBRARY\_PATH =

"/home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "576"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:

GOMP\_CPU\_AFFINITY = "0-575"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

P-State set to Enabled

NUMA Nodes per Socket set to NPS4

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sun Dec 29 18:48:08 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 16.1

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9017

Test Date: Dec-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

### Platform Notes (Continued)

```

6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
18:48:08 up 4 min, 1 user, load average: 0.81, 3.20, 1.72
USER      TTY      FROM          LOGIN@      IDLE       JCPU      PCPU      WHAT

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6188691
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6188691
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 16.1

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9017

Test Date: Dec-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

### Platform Notes (Continued)

```

/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeerd --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.018/templogs/preenv.intspeerd.018.0.log --lognum 018.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9825 144-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101025
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 144
siblings      : 288
2 physical ids (chips)
576 processors (hardware threads)
physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 1: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 0: apicids
0-23,32-55,64-87,96-119,128-151,160-183,192-215,224-247,256-279,288-311,320-343,352-375
physical id 1: apicids
512-535,544-567,576-599,608-631,640-663,672-695,704-727,736-759,768-791,800-823,832-855,864-887
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      576
On-line CPU(s) list:         0-575
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                  AMD EPYC 9825 144-Core Processor
BIOS Model name:             AMD EPYC 9825 144-Core Processor
BIOS CPU family:             107
CPU family:                  26
Model:                       17
Thread(s) per core:          2
Core(s) per socket:          144
Socket(s):                   2
Stepping:                    0
Frequency boost:             enabled
CPU(s) scaling MHz:          101%
CPU max MHz:                 2200.0000
CPU min MHz:                 1500.0000
BogoMIPS:                    4393.13
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpoptndq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap
```

#### Virtualization:

```
AMD-V
L1d cache: 13.5 MiB (288 instances)
L1i cache: 9 MiB (288 instances)
L2 cache: 288 MiB (288 instances)
L3 cache: 768 MiB (24 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-35,288-323
NUMA node1 CPU(s): 36-71,324-359
NUMA node2 CPU(s): 72-107,360-395
NUMA node3 CPU(s): 108-143,396-431
NUMA node4 CPU(s): 144-179,432-467
NUMA node5 CPU(s): 180-215,468-503
NUMA node6 CPU(s): 216-251,504-539
NUMA node7 CPU(s): 252-287,540-575
```

```
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

#### From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 13.5M    | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 9M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 288M     | 16   | Unified     | 2     | 1024  | 1        | 64             |
| L3   | 32M      | 768M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

#### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 8 nodes (0-7)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

```

node 0 cpus: 0-35,288-323
node 0 size: 192863 MB
node 0 free: 192153 MB
node 1 cpus: 36-71,324-359
node 1 size: 193517 MB
node 1 free: 192694 MB
node 2 cpus: 72-107,360-395
node 2 size: 193517 MB
node 2 free: 192502 MB
node 3 cpus: 108-143,396-431
node 3 size: 193517 MB
node 3 free: 192863 MB
node 4 cpus: 144-179,432-467
node 4 size: 193517 MB
node 4 free: 193292 MB
node 5 cpus: 180-215,468-503
node 5 size: 193517 MB
node 5 free: 193324 MB
node 6 cpus: 216-251,504-539
node 6 size: 193478 MB
node 6 free: 193198 MB
node 7 cpus: 252-287,540-575
node 7 size: 193271 MB
node 7 free: 193071 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1584332004 kB

```

```

-----
10. who -r
    run-level 3 Dec 29 18:44

```

```

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target   Status
    multi-user       running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog sapconf smartd
sshd sysctl-logger systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 16.1

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9017

Test Date: Dec-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

### Platform Notes (Continued)

```
serial-getty@ smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd
```

```
generated ntp_sync
indirect systemd-userdbd uidd wickedd
```

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=36ce2ea9-ca92-4f5a-b22a-9bea62fad028
splash=silent
mitigations=auto
quiet
security=apparmor
```

-----  
14. cpupower frequency-info

```
analyzing CPU 376:
  current policy: frequency should be within 1.50 GHz and 2.20 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes
```

-----  
15. tuned-adm active

```
Current active profile: virtual-host
```

-----  
16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      5
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

-----  
17. /sys/kernel/mm/transparent\_hugepage

```
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

-----  
20. Disk information  
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda3 xfs 442G 124G 318G 28% /

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: Lenovo  
Product: ThinkSystem SR645 V3  
Product Family: ThinkSystem  
Serial: 1234567890

-----  
22. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
1x Samsung M321R8GA0PB1-CCPPC 64 GB 2 rank 6400, configured at 6000  
21x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400, configured at 6000  
2x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 6000

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: KAE131I-5.30  
BIOS Date: 12/17/2024  
BIOS Revision: 5.30  
Firmware Revision: 54.6

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

-----  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Compiler Version Notes (Continued)

-----  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

-----  
Fortran | 648.exchange2\_s(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_int\_base = 16.1

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9017

**Test Date:** Dec-2024

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Feb-2025

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2024

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

625.x264\_s: basepeak = yes

657.xz\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

657.xz\_s (continued):

-lamdlibm -lamdalloc -lflang

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -DSPEC\_OPENMP -mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=100 -zopt

-fvirtual-function-elimination -fvisibility=hidden

-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp

-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: basepeak = yes

641.leela\_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -DSPEC\_OPENMP -mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=100 -zopt

-fvirtual-function-elimination -fvisibility=hidden

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-29 05:48:07-0500.

Report generated on 2025-01-28 22:07:56 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-28.