



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)


SPECspeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECspeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

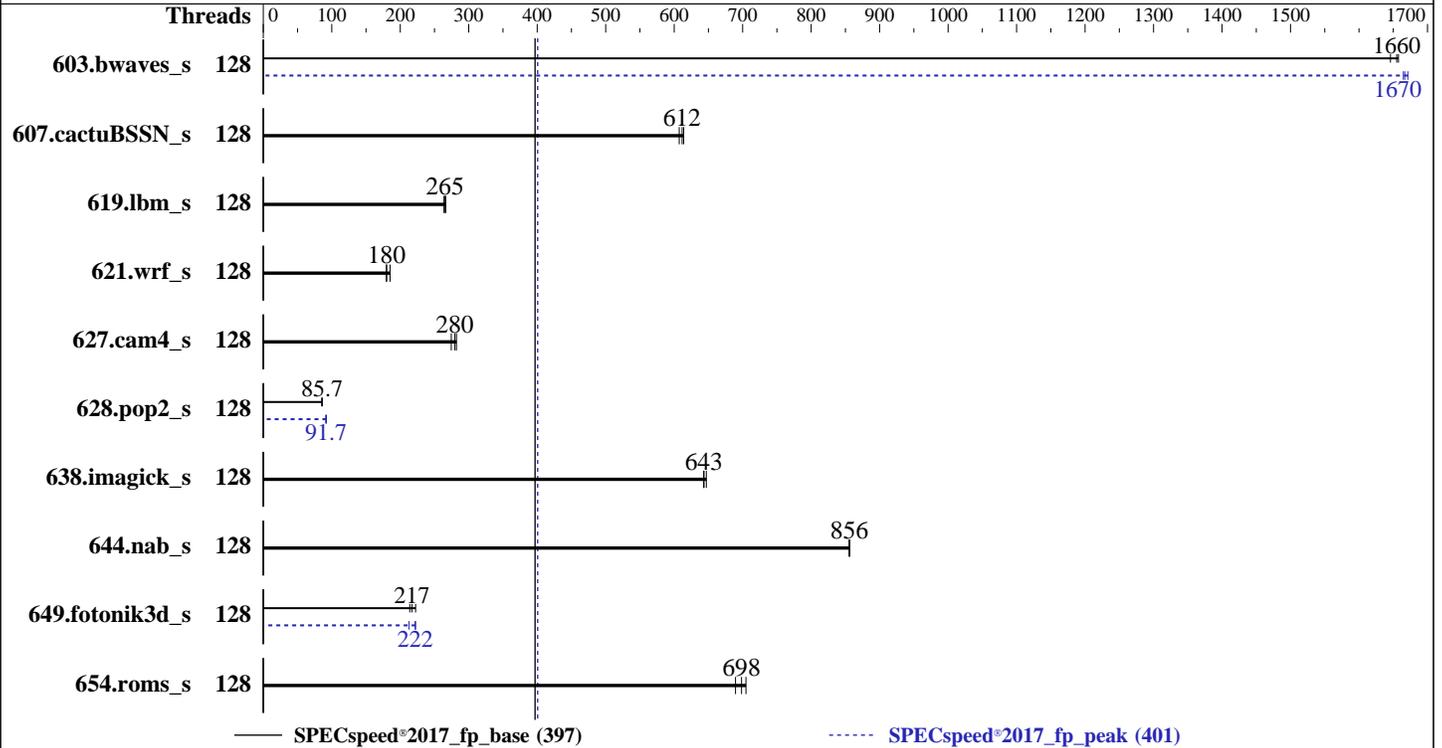

### Hardware

CPU Name: AMD EPYC 9554  
 Max MHz: 3750  
 Nominal: 3100  
 Enabled: 256 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC5-5600B-R, running at 4800)  
 Storage: 960 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: Ubuntu 22.04.5 LTS  
 kernel version 6.8.0-51-generic  
 C/C++/Fortran: Version 5.0.0 of AOCC  
 Compiler: Yes  
 Parallel: Yes  
 Firmware: Version 5.27 released Nov-2024  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: OS set to prefer performance at the expense of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECSpeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECSpeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	35.8	1650	<b><u>35.6</u></b>	<b><u>1660</u></b>	35.6	1660	128	35.3	1670	35.4	1660	<b><u>35.4</u></b>	<b><u>1670</u></b>
607.cactuBSSN_s	128	<b><u>27.3</u></b>	<b><u>612</u></b>	27.4	607	27.2	614	128	<b><u>27.3</u></b>	<b><u>612</u></b>	27.4	607	27.2	614
619.lbm_s	128	19.9	264	<b><u>19.7</u></b>	<b><u>265</u></b>	19.7	266	128	19.9	264	<b><u>19.7</u></b>	<b><u>265</u></b>	19.7	266
621.wrf_s	128	<b><u>73.4</u></b>	<b><u>180</u></b>	71.5	185	73.5	180	128	<b><u>73.4</u></b>	<b><u>180</u></b>	71.5	185	73.5	180
627.cam4_s	128	<b><u>31.7</u></b>	<b><u>280</u></b>	32.3	274	31.4	282	128	<b><u>31.7</u></b>	<b><u>280</u></b>	32.3	274	31.4	282
628.pop2_s	128	<b><u>138</u></b>	<b><u>85.7</u></b>	138	85.9	139	85.7	128	129	92.2	130	91.3	<b><u>129</u></b>	<b><u>91.7</u></b>
638.imagick_s	128	22.4	643	22.3	647	<b><u>22.4</u></b>	<b><u>643</u></b>	128	22.4	643	22.3	647	<b><u>22.4</u></b>	<b><u>643</u></b>
644.nab_s	128	20.4	856	<b><u>20.4</u></b>	<b><u>856</u></b>	20.4	855	128	20.4	856	<b><u>20.4</u></b>	<b><u>856</u></b>	20.4	855
649.fotonik3d_s	128	41.0	222	42.6	214	<b><u>42.0</u></b>	<b><u>217</u></b>	128	41.0	222	<b><u>41.1</u></b>	<b><u>222</u></b>	42.9	213
654.roms_s	128	<b><u>22.5</u></b>	<b><u>698</u></b>	22.3	705	22.8	690	128	<b><u>22.5</u></b>	<b><u>698</u></b>	22.3	705	22.8	690

SPECSpeed®2017\_fp\_base = **397**

SPECSpeed®2017\_fp\_peak = **401**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECSpeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECSpeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
  "/home/speccpu/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/speccpu/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"
```

Environment variables set by runcpu during the 603.bwaves\_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"
```

Environment variables set by runcpu during the 628.pop2\_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"
```

Environment variables set by runcpu during the 649.fotonik3d\_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

## Platform Notes

```
Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on AMD Mon Jan 20 16:04:33 2025
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECspeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id  
22. dmidecode  
23. BIOS

1. uname -a  
Linux AMD 6.8.0-51-generic #52-22.04.1-Ubuntu SMP PREEMPT\_DYNAMIC Mon Dec 9 15:00:52 UTC 2 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
16:04:33 up 5:32, 2 users, load average: 7.20, 8.90, 5.66  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
test :l :l 10:32 ?xdm? 3:00m 0.00s /usr/libexec/gdm-x-session --run-script env  
GNOME\_SHELL\_SESSION\_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu  
test pts/2 - 12:45 3:18m 2.27s 0.07s sudo -s

3. Username  
From environment variable \$USER: root  
From the command 'logname': test

4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 3094316  
nofiles 1024  
vmemory(kbytes) unlimited  
locks unlimited  
rtprio 0

5. sysinfo process ancestry  
/sbin/init splash  
/lib/systemd/systemd --user  
/usr/libexec/gnome-terminal-server  
bash  
sudo -s  
sudo -s  
/bin/bash  
python3 ./run\_amd\_speed\_aocc500\_znver5\_A1.py  
/bin/bash ./amd\_speed\_aocc500\_znver5\_A1.sh  
runcpu --config amd\_speed\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 fpspeed  
runcpu --configfile amd\_speed\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/speccpu/cpu2017

6. /proc/cpuinfo  
model name : AMD EPYC 9554 64-Core Processor  
vendor\_id : AuthenticAMD

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECspeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```

cpu family      : 25
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size      : 3584 4K pages
cpu cores      : 64
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:  0-255
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9554 64-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3762.9880
CPU min MHz:           1500.0000
BogoMIPS:              6200.45
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpoptndq la57 rdpid overflow_recov succor smca fsrm flush_l1d
debug_swap

Virtualization:        AMD-V
L1d cache:             4 MiB (128 instances)

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECspeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```

L1i cache:          4 MiB (128 instances)
L2 cache:          128 MiB (128 instances)
L3 cache:          512 MiB (16 instances)
NUMA node(s):      2
NUMA node0 CPU(s): 0-63,128-191
NUMA node1 CPU(s): 64-127,192-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:            Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:               Not affected
Vulnerability Tsx async abort:     Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-63,128-191
node 0 size: 386725 MB
node 0 free: 383556 MB
node 1 cpus: 64-127,192-255
node 1 size: 386930 MB
node 1 free: 384148 MB
node distances:
node  0  1
  0: 10 32
  1: 32 10

```

9. /proc/meminfo

MemTotal: 792222860 kB

10. who -r

run-level 5 Jan 20 10:32

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

```

Default Target Status
graphical      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD    ACTIVE SUB    DESCRIPTION

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECspeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

\* user@127.service loaded failed failed User Manager for UID 127

### 13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oomd systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	acpid brltty console-getty debug-shell ipmievd nftables openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysextd systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated	apport openipmi speech-dispatcher
indirect	saned@ spice-vdagentd uuidd
masked	alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned screen-cleanup sudo x11-common

### 14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-51-generic
root=UUID=e953dd87-e49e-4230-a412-5a6320fe39a0
ro
quiet
splash
vt.handoff=7
```

### 15. cpupower frequency-info

```
analyzing CPU 151:
  current policy: frequency should be within 1.50 GHz and 3.10 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes
  Boost States: 0
  Total States: 3
  Pstate-P0: 3100MHz
```

### 16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECspeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```

vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.5 LTS

```

```

-----
20. Disk information
SPEC is set to: /home/speccpu/cpu2017
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2       ext4      879G  35G  800G   5% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:         FusionStor
Product:        Fusionstor_Invento_i6000_EPYC_Series
Product Family: Server
Serial:         GNG6PB312A0006

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x Samsung M321R4GA3PB0-CWMMKJ 32 GB 2 rank 5600, configured at 4800

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:    FUSIONSTOR
BIOS Version:   F18
BIOS Date:      10/11/2024
BIOS Revision:  5.27

```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECspeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Compiler Version Notes

-----  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

-----  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

-----  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

-----  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

## Base Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECspeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECSpeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECSpeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECSpeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECSpeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math  
-fopenmp -fscalar-transform -fvector-transform  
-mllvm -reduce-array-computations=3 -Mrecursive  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math  
-fopenmp -flto -mllvm -reduce-array-computations=3  
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm  
-lamdalloc -lflang

654.roms\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECSpeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECSpeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_fp\_base = 397

**Invento i6000 EPYC (AMD EPYC 9554)**

SPECspeed®2017\_fp\_peak = 401

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-20 05:34:32-0500.  
Report generated on 2025-03-12 10:24:25 by CPU2017 PDF formatter v6716.  
Originally published on 2025-03-11.