



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221


Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

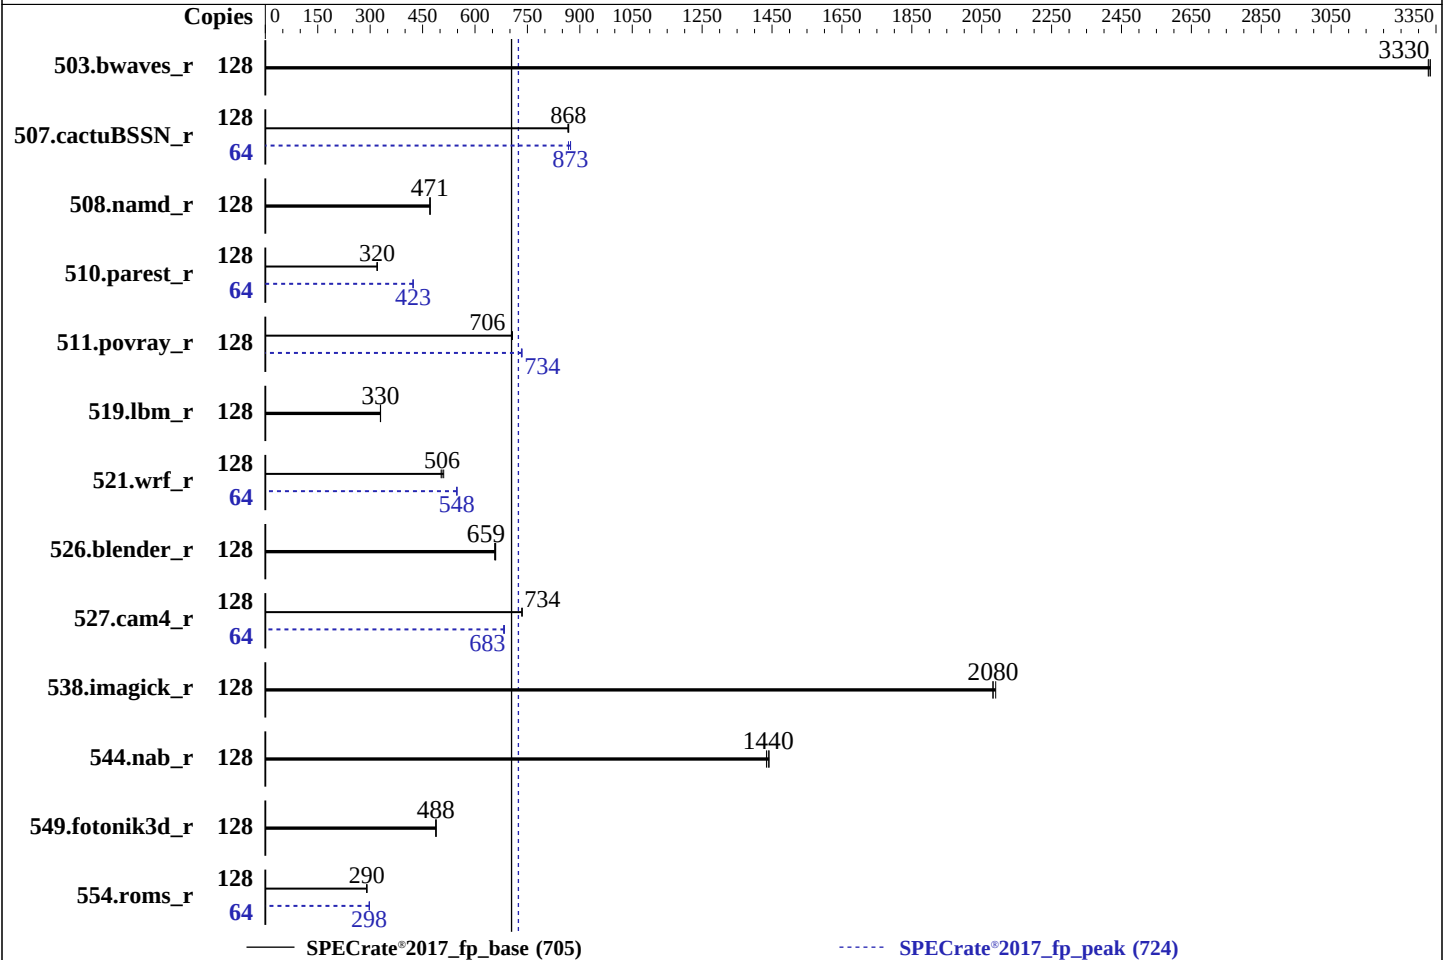

Hardware

CPU Name: Intel Xeon Gold 6548Y+
Max MHz: 4100
Nominal: 2500
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)
Storage: 960 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.5 LTS
6.8.0-49-generic
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version EG0.10.01 released Mar-2024
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: OS set to prefer performance at the expense of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<u>385</u>	<u>3330</u>	385	3330	386	3330	128	<u>385</u>	<u>3330</u>	385	3330	386	3330
507.cactuBSSN_r	128	<u>187</u>	<u>868</u>	187	868	187	866	64	92.8	873	<u>92.8</u>	<u>873</u>	93.4	868
508.namd_r	128	<u>258</u>	<u>471</u>	258	471	258	472	128	<u>258</u>	<u>471</u>	258	471	258	472
510.parest_r	128	1044	321	<u>1045</u>	<u>320</u>	1048	320	64	396	423	396	423	<u>396</u>	<u>423</u>
511.povray_r	128	<u>423</u>	<u>706</u>	423	706	423	707	128	<u>407</u>	<u>734</u>	408	733	407	734
519.lbm_r	128	409	330	410	329	<u>409</u>	<u>330</u>	128	409	330	410	329	<u>409</u>	<u>330</u>
521.wrf_r	128	<u>567</u>	<u>506</u>	562	510	570	503	64	262	548	<u>261</u>	<u>548</u>	261	548
526.blender_r	128	297	656	<u>296</u>	<u>659</u>	296	659	128	297	656	<u>296</u>	<u>659</u>	296	659
527.cam4_r	128	305	734	<u>305</u>	<u>734</u>	305	735	64	<u>164</u>	<u>683</u>	164	684	164	682
538.imagick_r	128	152	2090	153	2080	<u>153</u>	<u>2080</u>	128	152	2090	153	2080	<u>153</u>	<u>2080</u>
544.nab_r	128	149	1440	150	1430	<u>150</u>	<u>1440</u>	128	149	1440	150	1430	<u>150</u>	<u>1440</u>
549.fotonik3d_r	128	<u>1022</u>	<u>488</u>	1020	489	1022	488	128	<u>1022</u>	<u>488</u>	1020	489	1022	488
554.roms_r	128	<u>700</u>	<u>290</u>	700	291	701	290	64	341	298	342	297	<u>342</u>	<u>298</u>

SPECrate®2017_fp_base = 705

SPECrate®2017_fp_peak = 724

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/cpu2017/lib/intel64:/home/speccpu/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on intel Fri Dec 13 19:00:09 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux intel 6.8.0-49-generic #49-22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Wed Nov 6 17:42:15 UTC 2 x86_64 x86_64
x86_64 GNU/Linux

2. w
19:00:09 up 6:39, 2 users, load average: 71.53, 112.72, 121.17
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
intel :1 :1 12:24 ?xdm? 39:14 0.00s /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
intel pts/1 - 13:12 5:48m 0.88s 0.03s sudo
./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh

3. Username
From environment variable \$USER: root
From the command 'logname': intel

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Platform Notes (Continued)

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 132058160
process            4126513
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0

-----

5. sysinfo process ancestry
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sh ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.032/temlogs/preenv.fprate.032.0.log --lognum 032.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017

-----

6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6548Y+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000230
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----

7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Platform Notes (Continued)

Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	128
On-line CPU(s) list:	0-127
Vendor ID:	GenuineIntel
Model name:	INTEL(R) XEON(R) GOLD 6548Y+
CPU family:	6
Model:	207
Thread(s) per core:	2
Core(s) per socket:	32
Socket(s):	2
Stepping:	2
CPU max MHz:	4100.0000
CPU min MHz:	800.0000
BogoMIPS:	5000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	3 MiB (64 instances)
L1i cache:	2 MiB (64 instances)
L2 cache:	128 MiB (64 instances)
L3 cache:	120 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-31,64-95
NUMA node1 CPU(s):	32-63,96-127
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-IBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
------	----------	----------	------	------	-------	------	----------	----------------

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Platform Notes (Continued)

L1d	48K	3M	12 Data	1	64	1	64
L1i	32K	2M	8 Instruction	1	64	1	64
L2	2M	128M	16 Unified	2	2048	1	64
L3	60M	120M	15 Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-31,64-95

node 0 size: 515637 MB

node 0 free: 483821 MB

node 1 cpus: 32-63,96-127

node 1 size: 516066 MB

node 1 free: 486847 MB

node distances:

node 0 1

0: 10 21

1: 21 10

9. /proc/meminfo

MemTotal: 1056465284 kB

10. who -r

run-level 5 Dec 13 12:21

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

Default Target Status

graphical degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
------	------	--------	-----	-------------

* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online
--------------------------------------	--------	--------	--------	-----------------------------

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
-------	------------

enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oond systemd-pstore systemd-resolved systemd-timesyncd teamviewer thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	acpid brltty console-getty debug-shell nftables openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysext systemd-time-wait-sync tlp upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated	apport cpufrequtils loadcpufreq speech-dispatcher
indirect	saned@ spice-vdagentd uuidd
masked	alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned screen-cleanup sudo systemd-rfkill x11-common

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-49-generic
root=UUID=073562bb-1438-42b9-adfa-6a6f7f3d3559
ro
quiet
splash
vt.handoff=7
```

15. cpupower frequency-info

```
analyzing CPU 98:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag          always defer defer+madvice [madvice] never
enabled         always [madvice] never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
```

19. OS release

```
From /etc/*-release /etc/*-version
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Platform Notes (Continued)

os-release Ubuntu 22.04.5 LTS

20. Disk information

SPEC is set to: /home/speccpu/cpu2017

Filesystem	Type	Size	Used	Avail	Use% Mounted on
/dev/sda2	ext4	879G	684G	151G	82% /

21. /sys/devices/virtual/dmi/id

Vendor: Fusionstor
Product: Invento_i6000
Product Family: SG_Intel_EagleStream
Serial: HQ3110001BDA03CD0002

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x NO DIMM NO DIMM

16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800, configured at 4400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: EG0.10.01
BIOS Date: 03/22/2024
BIOS Revision: 5.32

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Compiler Version Notes (Continued)

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 705

Invento i6000 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Dec-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-13 08:30:08-0500.

Report generated on 2025-03-12 10:24:48 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-11.