



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.9

PowerEdge R470 (Intel Xeon 6787P)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

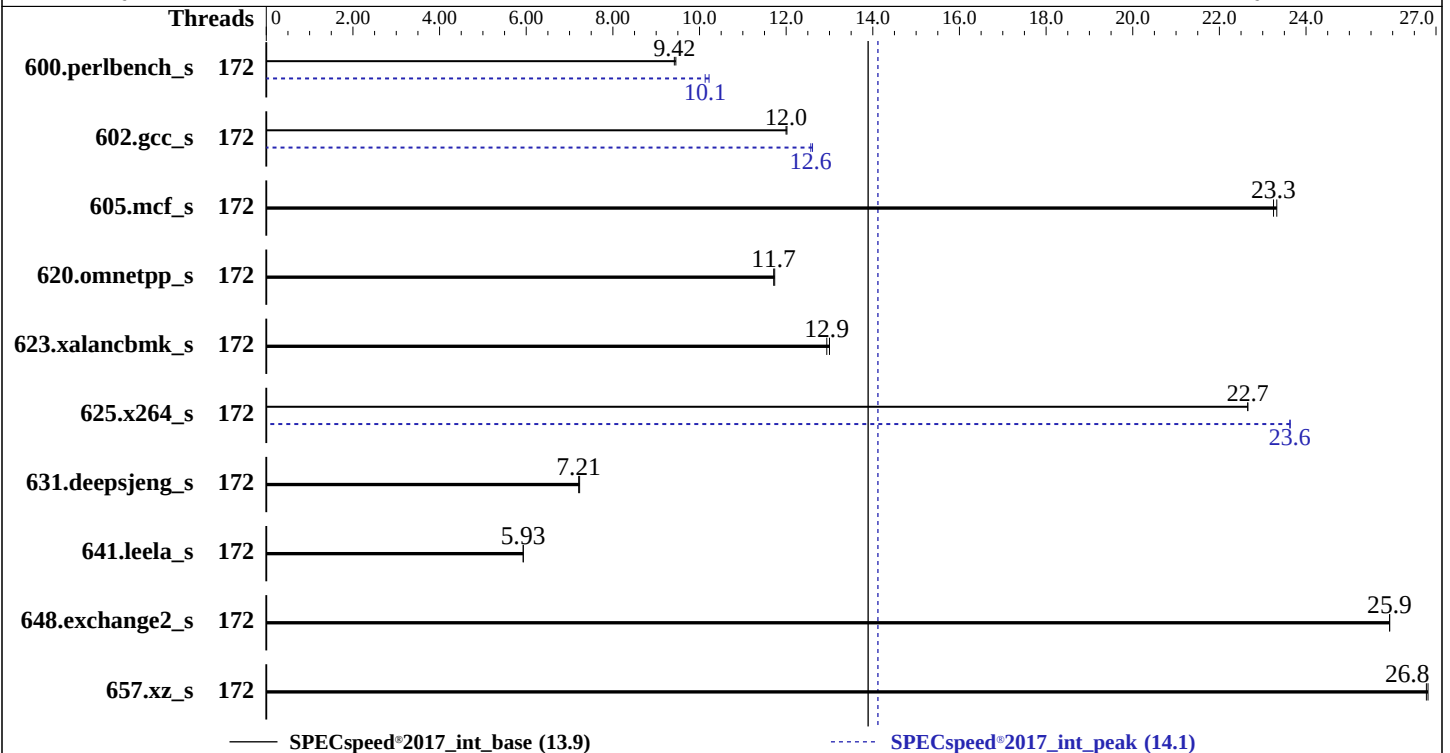

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 86 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 100 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler
for Linux;
Parallel: Yes
Firmware: Version 1.2.6 released Feb-2025
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of
additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.9

PowerEdge R470 (Intel Xeon 6787P)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	172	188	9.45	<u>188</u>	<u>9.42</u>			172	174	10.2	<u>175</u>	<u>10.1</u>		
602.gcc_s	172	331	12.0	<u>332</u>	<u>12.0</u>			172	<u>317</u>	<u>12.6</u>	316	12.6		
605.mcf_s	172	<u>203</u>	<u>23.3</u>	202	23.3			172	<u>203</u>	<u>23.3</u>	202	23.3		
620.omnetpp_s	172	<u>139</u>	<u>11.7</u>	139	11.7			172	<u>139</u>	<u>11.7</u>	139	11.7		
623.xalancbmk_s	172	<u>110</u>	<u>12.9</u>	109	13.0			172	<u>110</u>	<u>12.9</u>	109	13.0		
625.x264_s	172	<u>77.9</u>	<u>22.7</u>	77.9	22.7			172	74.6	23.6	<u>74.7</u>	<u>23.6</u>		
631.deepsjeng_s	172	198	7.23	<u>199</u>	<u>7.21</u>			172	198	7.23	<u>199</u>	<u>7.21</u>		
641.leela_s	172	288	5.93	<u>288</u>	<u>5.93</u>			172	288	5.93	<u>288</u>	<u>5.93</u>		
648.exchange2_s	172	<u>113</u>	<u>25.9</u>	113	25.9			172	<u>113</u>	<u>25.9</u>	113	25.9		
657.xz_s	172	<u>231</u>	<u>26.8</u>	231	26.8			172	<u>231</u>	<u>26.8</u>	231	26.8		

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

Benchmark run from a 100 GB ramdisk created with the cmd: "mount -t tmpfs -o size=100G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.9

PowerEdge R470 (Intel Xeon 6787P)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes

BIOS Settings:

Sub NUMA Cluster : Enabled
LLC Prefetch : Enabled
Optimizer Mode : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
Energy Efficient Turbo : Disabled
C1E : Disabled
C-States : Autonomous
Uncore Frequency : Maximum
Latency Optimized Mode : Enabled
Energy Efficient Policy : Performance
CPU Interconnect Bus -
Link Power Management : Disabled
PCI ASPM L1 Link Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 1234567-R470 Mon Mar 10 16:07:52 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux 1234567-R470 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
16:07:52 up 2 min, 1 user, load average: 1.26, 0.81, 0.34
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.9

PowerEdge R470 (Intel Xeon 6787P)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
root      tty1      -                  16:06   21.00s  0.83s  0.00s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.1a --output_format html,pdf,txt
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2062178
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2062178
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.1a --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.1a --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=86 --tune base,peak -o all --define
intspeedaffinity --define smt-on --define drop_caches --iterations 2 --define DL-VERS=6.1a --output_format
html,pdf,txt intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=86 --tune base,peak --output_format all
--define intspeedaffinity --define smt-on --define drop_caches --iterations 2 --define DL-VERS=6.1a
--output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed intspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/tempslogs/preenv.intspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6787P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swaps bhi
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.9

PowerEdge R470 (Intel Xeon 6787P)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

cpu cores : 86
siblings : 172
1 physical ids (chips)
172 processors (hardware threads)
physical id 0: core ids 0-42,64-106
physical id 0: apicids 0-85,128-213

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 172
On-line CPU(s) list: 0-171
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel
Model name: Intel(R) Xeon(R) 6787P
BIOS Model name: Intel(R) Xeon(R) 6787P CPU @ 2.0GHz
BIOS CPU family: 179
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 86
Socket(s): 1
Stepping: 1
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdc_m pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_l1d arch_capabilities
Virtualization: VT-x
L1d cache: 4 MiB (86 instances)
L1i cache: 5.4 MiB (86 instances)
L2 cache: 172 MiB (86 instances)
L3 cache: 336 MiB (1 instance)
NUMA node(s): 2
NUMA node0 CPU(s): 0-42,86-128
NUMA node1 CPU(s): 43-85,129-171
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.9

PowerEdge R470 (Intel Xeon 6787P)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4M	12	Data	1	64	1	64
L1i	64K	5.4M	16	Instruction	1	64	1	64
L2	2M	172M	16	Unified	2	2048	1	64
L3	336M	336M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-42,86-128
node 0 size: 257627 MB
node 0 free: 245684 MB
node 1 cpus: 43-85,129-171
node 1 size: 257946 MB
node 1 free: 257006 MB
node distances:
node 0 1
0: 10 12
1: 12 10

9. /proc/meminfo

MemTotal: 527947696 kB

10. who -r

run-level 3 Mar 10 16:05

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	accounts-daemon autofs autostart-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmiev

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.9

PowerEdge R470 (Intel Xeon 6787P)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

indirect
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync
systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=85ac5619-9d4c-4ccf-ae8c-57a9b22badda
splash=silent
resume=/dev/disk/by-uuid/b3f79258-8fb5-4b36-b029-20c18943748c
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 69:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

16. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.9

PowerEdge R470 (Intel Xeon 6787P)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 100G 5.0G 96G 5% /mnt/ramdisk

20. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.
Product: PowerEdge R470
Product Family: PowerEdge
Serial: 1234567

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x 002C0423002C MTC40F2046S1RC64BD2 UXCC 64 GB 2 rank 6400
6x 00CE042300CE M321R8GA0PB2-CCPEC 64 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.2.6
BIOS Date: 02/26/2025
BIOS Revision: 1.2

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.9

PowerEdge R470 (Intel Xeon 6787P)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

=====

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.9

PowerEdge R470 (Intel Xeon 6787P)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc  
  
602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.9

PowerEdge R470 (Intel Xeon 6787P)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-10 04:07:52-0400.

Report generated on 2025-03-28 09:24:08 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-27.