



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358


Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

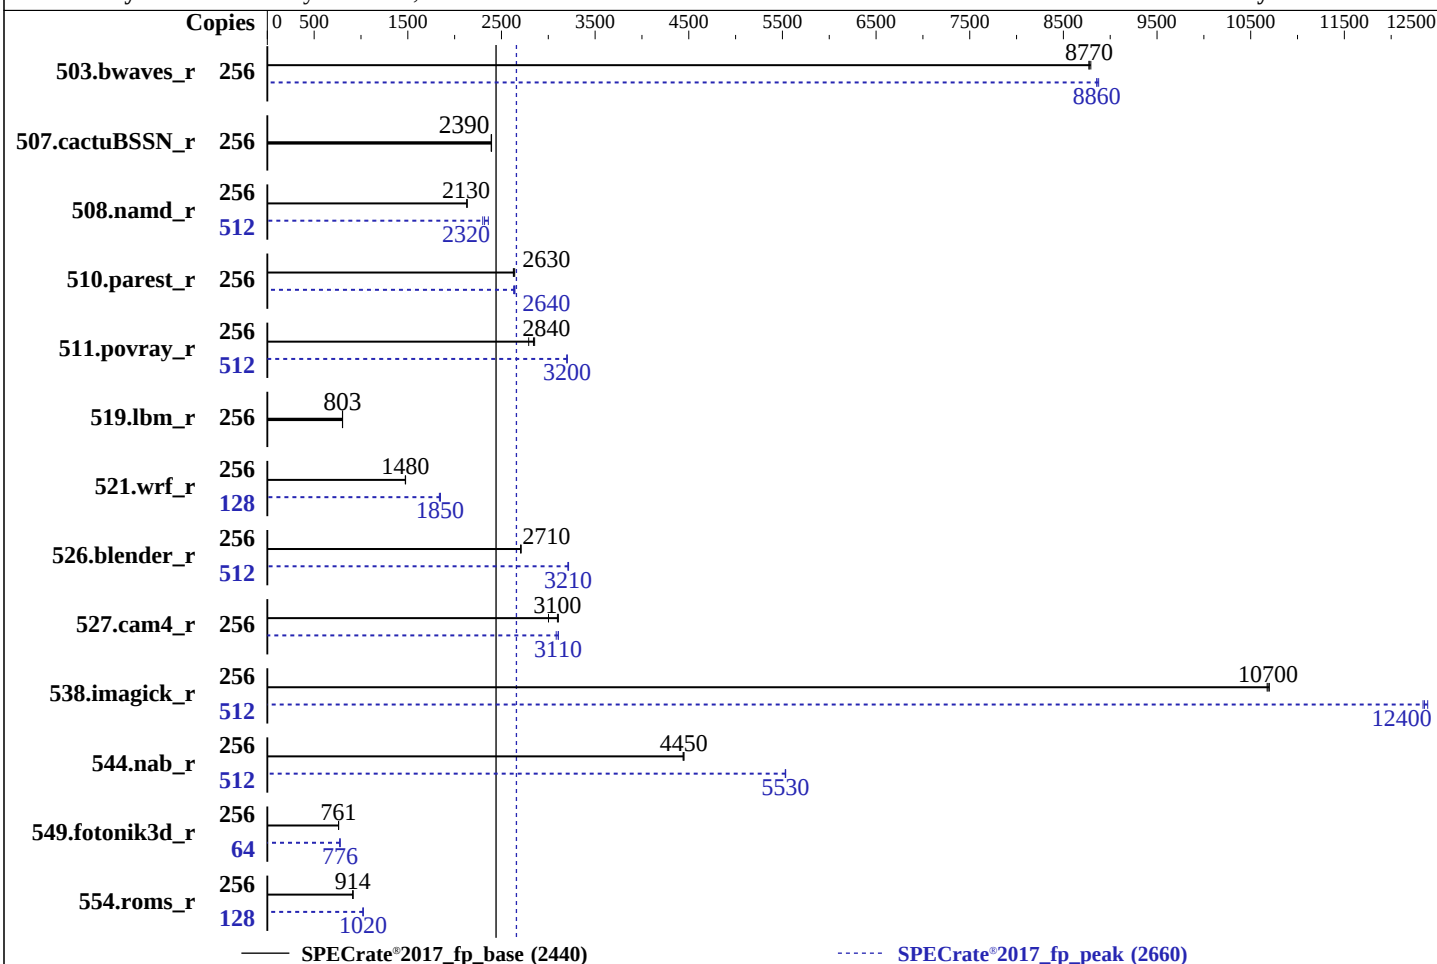

Hardware

CPU Name: AMD EPYC 9755
Max MHz: 4100
Nominal: 2700
Enabled: 256 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 512 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 960 GB NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 01.08.00 released Feb-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	<u>293</u>	<u>8770</u>	293	8770	292	8790	256	289	8880	<u>290</u>	<u>8860</u>	290	8860
507.cactuBSSN_r	256	<u>135</u>	<u>2390</u>	135	2390	136	2390	256	<u>135</u>	<u>2390</u>	135	2390	136	2390
508.namd_r	256	114	2130	114	2130	<u>114</u>	<u>2130</u>	512	211	2300	<u>210</u>	<u>2320</u>	206	2360
510.parest_r	256	254	2640	<u>254</u>	<u>2630</u>	255	2630	256	253	2640	255	2630	<u>254</u>	<u>2640</u>
511.povray_r	256	<u>210</u>	<u>2840</u>	214	2790	209	2850	512	<u>374</u>	<u>3200</u>	373	3200	374	3200
519.lbm_r	256	<u>336</u>	<u>803</u>	336	804	336	802	256	<u>336</u>	<u>803</u>	336	804	336	802
521.wrf_r	256	<u>389</u>	<u>1480</u>	388	1480	389	1470	128	155	1850	<u>155</u>	<u>1850</u>	156	1840
526.blender_r	256	<u>144</u>	<u>2710</u>	144	2710	144	2710	512	243	3210	<u>243</u>	<u>3210</u>	242	3220
527.cam4_r	256	<u>145</u>	<u>3100</u>	149	3000	144	3110	256	144	3110	145	3080	<u>144</u>	<u>3110</u>
538.imagick_r	256	<u>59.6</u>	<u>10700</u>	59.5	10700	59.6	10700	512	103	12300	103	12400	<u>103</u>	<u>12400</u>
544.nab_r	256	96.9	4450	97.1	4440	<u>96.9</u>	<u>4450</u>	512	156	5530	<u>156</u>	<u>5530</u>	156	5530
549.fotonik3d_r	256	<u>1311</u>	<u>761</u>	1313	760	1311	761	64	321	776	322	775	<u>321</u>	<u>776</u>
554.roms_r	256	446	913	445	914	<u>445</u>	<u>914</u>	128	<u>199</u>	<u>1020</u>	199	1020	199	1020

SPECrate®2017_fp_base = 2440

SPECrate®2017_fp_peak = 2660

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib:/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Mar 6 04:43:08 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

x86_64 x86_64 x86_64 GNU/Linux

2. w

```
04:43:08 up 5:05, 1 user, load average: 268.40, 445.56, 478.38
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -             23:38    5:05m  1.25s  0.31s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6187450
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files               (-n) 65535
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6187450
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9755 128-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00211e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores       : 128
siblings        : 256
2 physical ids (chips)
512 processors (hardware threads)
physical id 0:  core ids 0-127
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

physical id 1: core ids 0-127
physical id 0: apicids 0-255
physical id 1: apicids 256-511

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	512
On-line CPU(s) list:	0-511
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9755 128-Core Processor
BIOS Model name:	AMD EPYC 9755 128-Core Processor
BIOS CPU family:	107
CPU family:	26
Model:	2
Thread(s) per core:	2
Core(s) per socket:	128
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	66%
CPU max MHz:	4121.1909
CPU min MHz:	1500.0000
BogoMIPS:	5391.66
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_lld debug_swap
Virtualization:	AMD-V
L1d cache:	12 MiB (256 instances)
L1i cache:	8 MiB (256 instances)
L2 cache:	256 MiB (256 instances)
L3 cache:	1 GiB (32 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-31, 256-287
NUMA node1 CPU(s):	32-63, 288-319

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

NUMA node2 CPU(s): 64-95,320-351
NUMA node3 CPU(s): 96-127,352-383
NUMA node4 CPU(s): 128-159,384-415
NUMA node5 CPU(s): 160-191,416-447
NUMA node6 CPU(s): 192-223,448-479
NUMA node7 CPU(s): 224-255,480-511
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	16	Unified	2	1024	1	64
L3	32M	1G	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-31,256-287
node 0 size: 192864 MB
node 0 free: 191137 MB
node 1 cpus: 32-63,288-319
node 1 size: 193519 MB
node 1 free: 191914 MB
node 2 cpus: 64-95,320-351
node 2 size: 193519 MB
node 2 free: 191881 MB
node 3 cpus: 96-127,352-383
node 3 size: 193519 MB
node 3 free: 191913 MB
node 4 cpus: 128-159,384-415
node 4 size: 193519 MB
node 4 free: 191892 MB
node 5 cpus: 160-191,416-447
node 5 size: 193519 MB
node 5 free: 191900 MB
node 6 cpus: 192-223,448-479
node 6 size: 193519 MB
node 6 free: 191871 MB
node 7 cpus: 224-255,480-511
node 7 size: 192908 MB
node 7 free: 191346 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 12 12 32 32 32 32

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
1: 12 10 12 12 32 32 32 32
2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10
```

```
-----
9. /proc/meminfo
MemTotal:      1584012712 kB
```

```
-----
10. who -r
run-level 3 Mar 5 23:37
```

```
-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target   Status
multi-user       running
```

```
-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
           kdump-early kdump-notify nvme-fc-boot-connections nvmmf-autoconnect postfix purge-kernels
           rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
           wickedd-nanny
enabled-runtime systemd-remount-fs
disabled   boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables
           exchange-bmc-os-info fsidd grub2-once haveged hwloc-dump-hwdata ipmievd issue-add-ssh-keys
           kexec-load nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@
           systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
           systemd-time-wait-sync systemd-timesyncd tuned
generated  jexec
indirect   systemd-userdbd wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=57526b2a-7733-4c34-8e82-bd01bcfc67e9
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=383M,high
crashkernel=72M,low
```

```
-----
14. cpupower frequency-info
analyzing CPU 277:
current policy: frequency should be within 1.50 GHz and 2.70 GHz.
                 The governor "performance" may decide which speed to use
                 within this range.

boost state support:
Supported: yes
Active: yes
```

```
-----
15. tuned-adm active
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

16. sysctl

```
kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              1
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       1
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

20. Disk information

```
SPEC is set to: /home/CPU2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 854G 60G 795G 7% /home
```

21. /sys/devices/virtual/dmi/id

```
Vendor:      IEIT SYSTEMS
Product:     NF5280-A8-A0-R0-00
Product Family: Not specified
Serial:      000000000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.

BIOS Version: 01.08.00

BIOS Date: 02/08/2025

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang -ldl

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Benchmarks using both C and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=2000000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=2000000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

```
538.imagick_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

-lamdalloc -ldl -lflang

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -flto

-Mrecursive -mllvm -reduce-array-computations=3

-fepilog-vectorization-of-inductions -fvector-transform

-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -flto

-fstruct-layout=7 -mllvm -unroll-threshold=50

-fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3 -zopt -Mrecursive

-funroll-loops -mllvm -lsr-in-nested-loop

-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc

-ldl -lflang

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -flto

-fstruct-layout=7 -mllvm -unroll-threshold=50

-mllvm -inline-threshold=1000 -fremap-arrays

-mllvm -reduce-array-computations=3 -zopt -Mrecursive

-funroll-loops -mllvm -lsr-in-nested-loop

-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc

-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false

-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5

-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7

-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

-fremap-arrays -mllvm -reduce-array-computations=3 -zopt

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

511.povray_r (continued):

-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl

526.blender_r: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fltto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-amd-V1.1.html>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 2440

meta brain NF5280G8 (AMD EPYC 9755)

SPECrate®2017_fp_peak = 2660

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-amd-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-06 04:43:07-0500.

Report generated on 2025-04-09 15:01:44 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.