



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

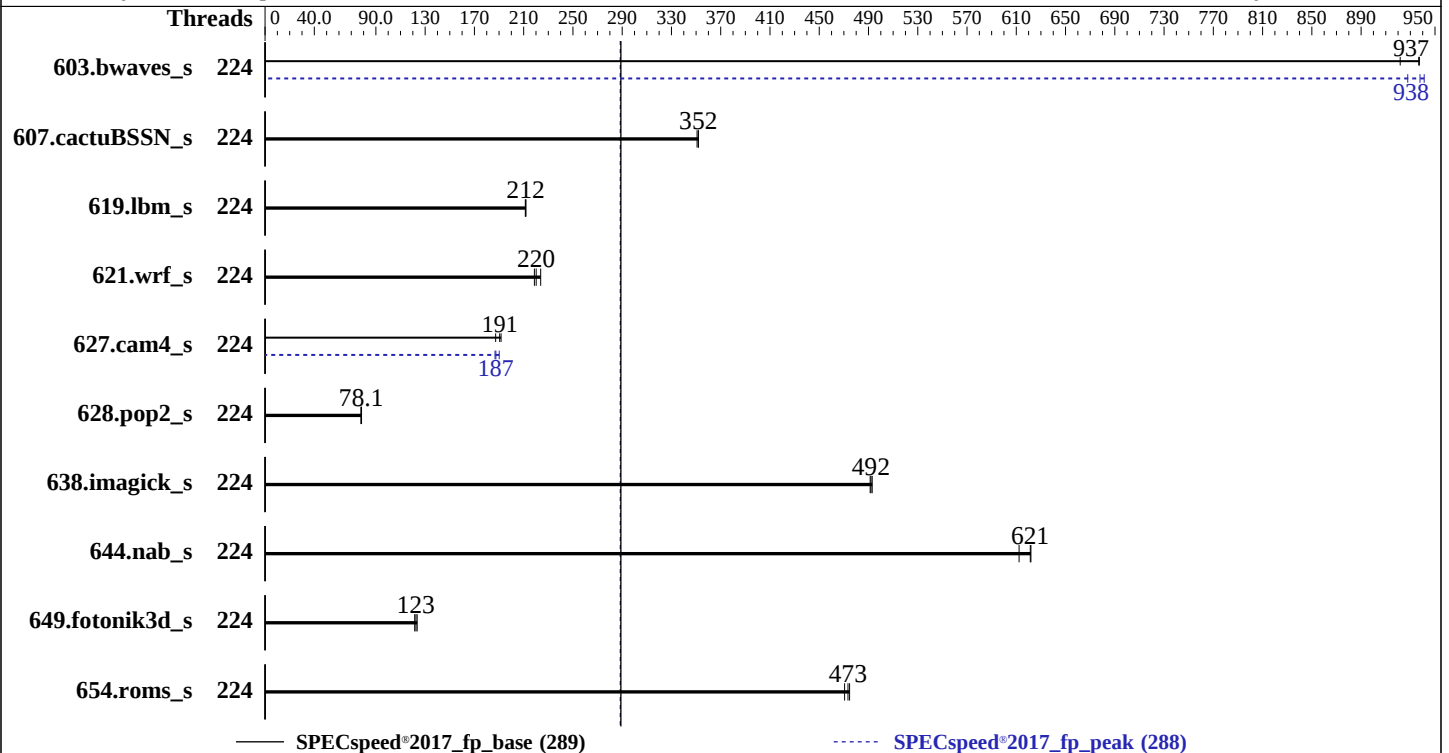

Hardware

CPU Name: Intel Xeon 6746E
Max MHz: 2700
Nominal: 2000
Enabled: 224 cores, 2 chips
Orderable: 2 chips
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 4 MB I+D on chip per core
L3: 96 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R, running at 5600)
Storage: 1 x 960 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version 1.2 released Feb-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM, Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	224	64.0	922	63.0	937	62.9	937	224	62.7	941	62.9	938	63.6	928
607.cactuBSSN_s	224	47.4	352	47.5	351	47.4	352	224	47.4	352	47.5	351	47.4	352
619.lbm_s	224	24.7	212	24.8	211	24.7	212	224	24.7	212	24.8	211	24.7	212
621.wrf_s	224	60.5	219	59.1	224	60.1	220	224	60.5	219	59.1	224	60.1	220
627.cam4_s	224	46.2	192	47.3	187	46.5	191	224	46.6	190	47.5	187	47.3	187
628.pop2_s	224	152	78.3	152	78.1	152	77.9	224	152	78.3	152	78.1	152	77.9
638.imagick_s	224	29.3	493	29.3	492	29.4	491	224	29.3	493	29.3	492	29.4	491
644.nab_s	224	28.5	612	28.1	621	28.1	622	224	28.5	612	28.1	621	28.1	622
649.fotonik3d_s	224	74.4	123	73.8	124	75.0	121	224	74.4	123	73.8	124	75.0	121
654.roms_s	224	33.3	473	33.2	475	33.5	471	224	33.3	473	33.2	475	33.5	471

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM, Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

Platform Notes

BIOS Configuration:
Workload Profile = HPC
LLC Dead Line Alloc = Disable
KTI Prefetch = Enable
Stale AtoS = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Apr 15 10:31:24 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
10:31:24 up 11:35, 1 user, load average: 4.78, 6.99, 4.23
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 22:56 11:30m 1.58s 0.02s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM, Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

Platform Notes (Continued)

file size	(blocks, -f)	unlimited
pending signals	(-i)	4126434
max locked memory	(kbytes, -l)	8192
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	4126434
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=224 --tune base,peak -o all --define smt-on
--define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=224 --tune base,peak --output_format all
--define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeak fpspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.004/temlogs/preenv.fpspeed.004.0.log --lognum 004.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6746E
vendor_id       : GenuineIntel
cpu family      : 6
model           : 175
stepping        : 3
microcode       : 0x3000330
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 112
siblings        : 112
2 physical ids (chips)
224 processors (hardware threads)
physical id 0:  core ids 0-111
physical id 1:  core ids 0-111
physical id 0:  apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 1
32, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 18
4, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222
physical id 1:  apicids
512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 5
64, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606, 608, 610, 612, 614, 61
6, 618, 620, 622, 624, 626, 628, 630, 632, 634, 636, 638, 640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668
, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718, 720,
722, 724, 726, 728, 730, 732, 734
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 48 bits virtual
Byte Order:	Little Endian
CPU(s):	224
On-line CPU(s) list:	0-223
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6746E
BIOS Model name:	Intel(R) Xeon(R) 6746E CPU @ 2.0GHz
BIOS CPU family:	179
CPU family:	6
Model:	175
Thread(s) per core:	1
Core(s) per socket:	112
Socket(s):	2
Stepping:	3
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcem pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig arch_lbr ibt flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	7 MiB (224 instances)
L1i cache:	14 MiB (224 instances)
L2 cache:	224 MiB (56 instances)
L3 cache:	192 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-111
NUMA node1 CPU(s):	112-223
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-IBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM, Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	7M	8	Data	1	64	1	64
L1i	64K	14M	8	Instruction	1	128	1	64
L2	4M	224M	16	Unified	2	4096	1	64
L3	96M	192M	12	Unified	3	131072	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-111
node 0 size: 515608 MB
node 0 free: 461804 MB
node 1 cpus: 112-223
node 1 size: 516026 MB
node 1 free: 472232 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10
```

9. /proc/meminfo

MemTotal: 1056394116 kB

10. who -r

run-level 3 Apr 14 22:56

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdl issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd-generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=895dcdee-794c-425f-842f-d00281f30563
splash=silent
mitigations=auto

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

Platform Notes (Continued)

quiet
security=apparmor
nomodeset

14. cpupower frequency-info
analyzing CPU 23:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

Platform Notes (Continued)

20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	xfs	892G	118G	774G	14%	/

21. /sys/devices/virtual/dmi/id

Vendor: Supermicro
Product: Super Server
Product Family: Family
Serial: 0123456789

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 5600

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.2
BIOS Date: 02/20/2025
BIOS Revision: 5.35

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

Compiler Version Notes (Continued)

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsierraforest
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-GNR-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-GNR-revB.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECspeed®2017_fp_base = 289

SPECspeed®2017_fp_peak = 288

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-14 22:31:23-0400.
Report generated on 2025-05-08 10:04:21 by CPU2017 PDF formatter v6716.
Originally published on 2025-05-06.