



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

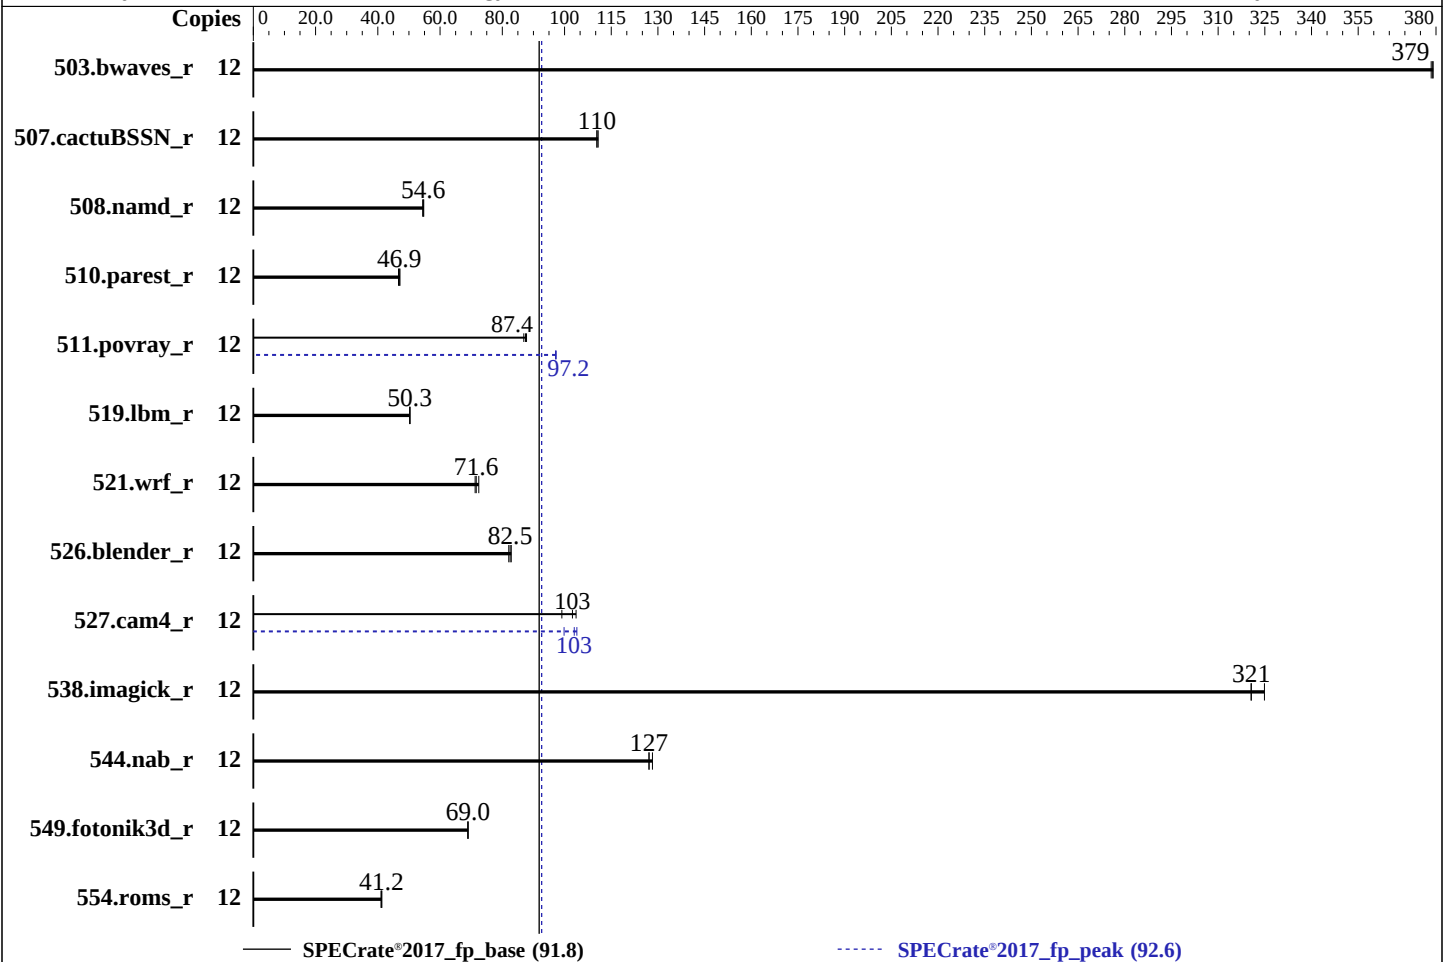

Hardware

CPU Name: Intel Xeon 6337P
Max MHz: 5300
Nominal: 3500
Enabled: 6 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 18 MB I+D on chip per chip
Other: None
Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 4400)
Storage: 1 x 480 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.5 (Plow)
Kernel 5.14.0-503.11.1.el9_5.x86_64
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Lenovo BIOS Version CTE119B 7.10 released Feb-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	12	317	379	318	378	<u>318</u>	<u>379</u>	12	317	379	318	378	<u>318</u>	<u>379</u>
507.cactuBSSN_r	12	<u>138</u>	<u>110</u>	138	110	137	111	12	<u>138</u>	<u>110</u>	138	110	137	111
508.namd_r	12	<u>209</u>	<u>54.6</u>	210	54.4	208	54.8	12	<u>209</u>	<u>54.6</u>	210	54.4	208	54.8
510.parest_r	12	666	47.1	673	46.7	<u>669</u>	<u>46.9</u>	12	666	47.1	673	46.7	<u>669</u>	<u>46.9</u>
511.povray_r	12	<u>320</u>	<u>87.4</u>	322	86.9	319	87.8	12	288	97.3	288	97.1	<u>288</u>	<u>97.2</u>
519.lbm_r	12	<u>252</u>	<u>50.3</u>	252	50.3	251	50.3	12	<u>252</u>	<u>50.3</u>	252	50.3	251	50.3
521.wrf_r	12	<u>375</u>	<u>71.6</u>	377	71.3	371	72.4	12	<u>375</u>	<u>71.6</u>	377	71.3	371	72.4
526.blender_r	12	<u>222</u>	<u>82.5</u>	223	82.1	221	82.9	12	<u>222</u>	<u>82.5</u>	223	82.1	221	82.9
527.cam4_r	12	212	99.1	<u>205</u>	<u>103</u>	202	104	12	210	99.8	<u>204</u>	<u>103</u>	202	104
538.imagick_r	12	93.1	321	<u>93.1</u>	<u>321</u>	91.9	325	12	93.1	321	<u>93.1</u>	<u>321</u>	91.9	325
544.nab_r	12	<u>159</u>	<u>127</u>	159	127	157	128	12	<u>159</u>	<u>127</u>	159	127	157	128
549.fotonik3d_r	12	<u>678</u>	<u>69.0</u>	679	68.9	678	69.0	12	<u>678</u>	<u>69.0</u>	679	68.9	678	69.0
554.roms_r	12	<u>463</u>	<u>41.2</u>	465	41.0	462	41.3	12	<u>463</u>	<u>41.2</u>	465	41.0	462	41.3

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

General Notes (Continued)

is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed May 7 13:00:28 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-46.el9_5.2)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-503.11.1.el9_5.x86_64 #1 SMP PREEMPT_DYNAMIC Mon Sep 30 11:54:45 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux

2. w
13:00:28 up 3 min, 0 users, load average: 0.12, 0.03, 0.01
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Platform Notes (Continued)

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 256698
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 256698
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
sh Run306-compliant-ic2024.1-lin-core-avx2-ratefp-smt-on-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 -c
ic2024.1-lin-core-avx2-rate-20240308.cfg --define smt-on --define cores=6 --define physicallogical
--define no-numa --tune base,peak -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 --configfile
ic2024.1-lin-core-avx2-rate-20240308.cfg --define smt-on --define cores=6 --define physicallogical
--define no-numa --tune base,peak --output_format all --define drop_caches --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.780/temlogs/preenv.fprate.780.0.log --lognum 780.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6337P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 183
stepping        : 1
microcode       : 0x12c
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores       : 6
siblings        : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0: core ids 0-5
physical id 0: apicids 0-11
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Platform Notes (Continued)

CPU op-mode(s): 32-bit, 64-bit
Address sizes: 42 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 12
On-line CPU(s) list: 0-11
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6337P
BIOS Model name: Intel(R) Xeon(R) 6337P
CPU family: 6
Model: 183
Thread(s) per core: 2
Core(s) per socket: 6
Socket(s): 1
Stepping: 1
BogoMIPS: 6988.80
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect avx_vnni dtherm ida arat pln pts hfi vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear serialize pconfig arch_lbr ibt flush_l1d arch_capabilities VT-x
Virtualization: VT-x
L1d cache: 288 KiB (6 instances)
L1i cache: 192 KiB (6 instances)
L2 cache: 12 MiB (6 instances)
L3 cache: 18 MiB (1 instance)
NUMA node(s): 1
NUMA node0 CPU(s): 0-11
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	2M	12M	16	Unified	2	2048	1	64
L3	18M	18M	9	Unified	3	32768	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-11
node 0 size: 64215 MB
node 0 free: 63580 MB
node distances:
node      0
0:        10
```

9. /proc/meminfo

```
MemTotal:        65756204 kB
```

10. who -r

```
run-level 3 May 7 12:57
```

11. Systemd service manager version: systemd 252 (252-46.el9_5.2)

```
Default Target    Status
multi-user        running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd4,gpt2)/boot/vmlinuz-5.14.0-503.11.1.el9_5.x86_64
root=UUID=ac8f2e4e-a15f-4475-ba58-5cea88b71de2
ro
resume=UUID=b1768a5a-be88-4ca4-8723-20387600340a
```

14. cpupower frequency-info

```
analyzing CPU 9:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

15. sysctl

```
kernel.numa_balancing      0
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Platform Notes (Continued)

vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.5 (Plow)
redhat-release Red Hat Enterprise Linux release 9.5 (Plow)
system-release Red Hat Enterprise Linux release 9.5 (Plow)

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda4 xfs 361G 16G 346G 5% /home

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR250 V3
Product Family: ThinkSystem
Serial: 1234567890

21. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Platform Notes (Continued)

2x SK Hynix HMC688AGBEA081N 32 GB 2 rank 5600, configured at 4400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: CTE119B-7.10
BIOS Date: 02/20/2025
BIOS Revision: 7.10
Firmware Revision: 6.10

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.50 GHz, Intel Xeon 6337P)

SPECrate®2017_fp_base = 91.8

SPECrate®2017_fp_peak = 92.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Peak Optimization Flags (Continued)

521.wrf_r: basepeak = yes

```
527.cam4_r: -w -m64 -std=c11 -Wl, -z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-07 01:00:28-0400.

Report generated on 2025-06-03 15:45:54 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-03.