



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

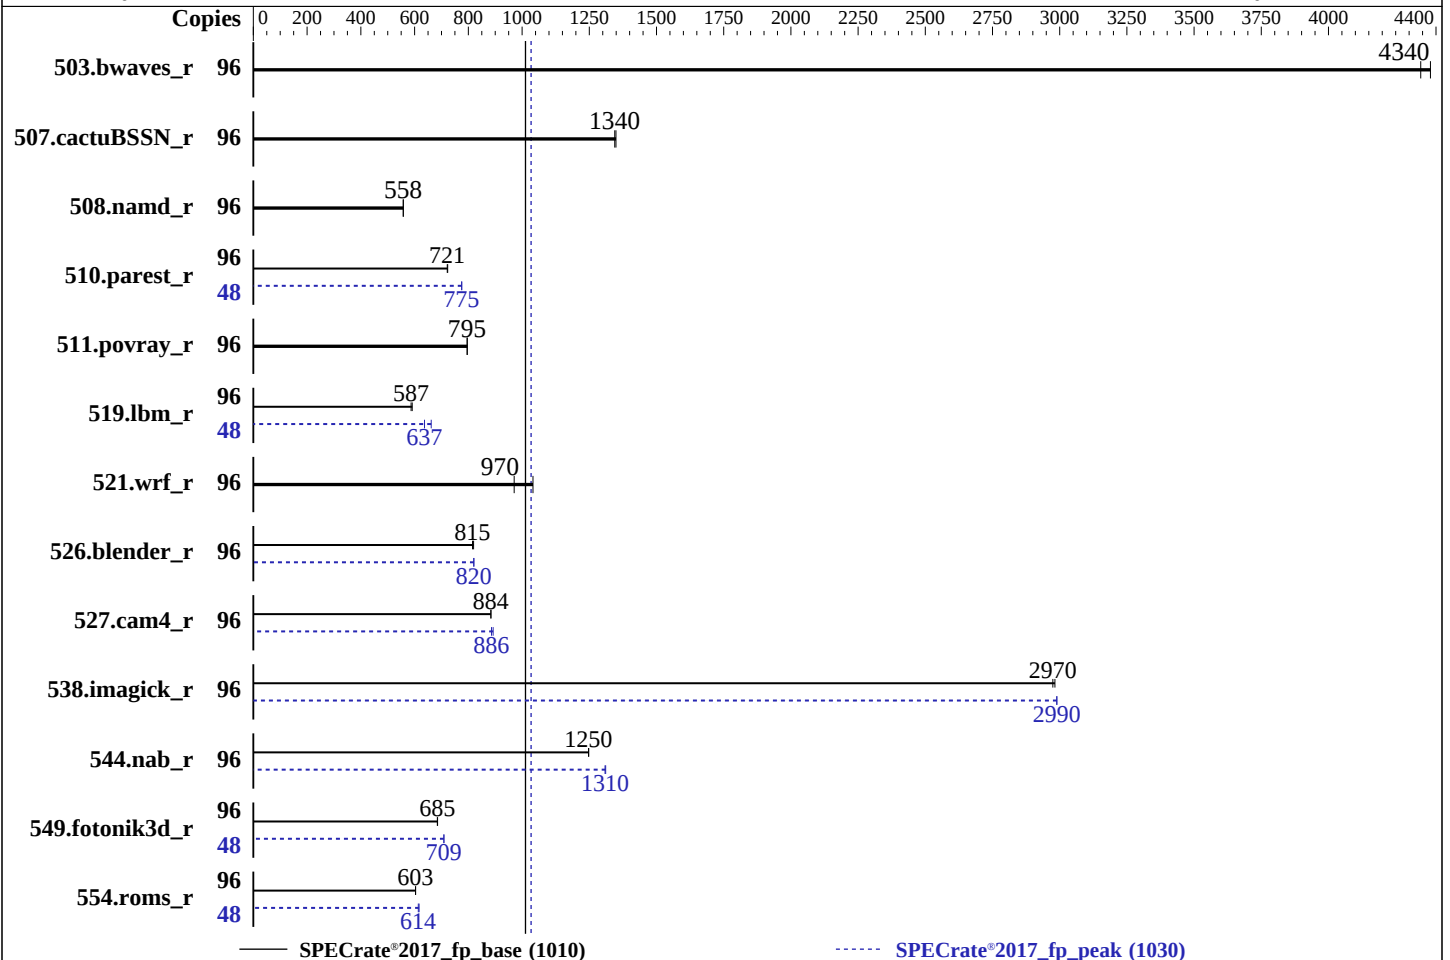

Hardware

CPU Name: AMD EPYC 9255
Max MHz: 4300
Nominal: 3200
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 70 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04 LTS
6.8.0-58-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 1.1.3 released Feb-2025
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	220	4380	<u>222</u>	<u>4340</u>			96	220	4380	<u>222</u>	<u>4340</u>		
507.cactuBSSN_r	96	90.1	1350	<u>90.4</u>	<u>1340</u>			96	90.1	1350	<u>90.4</u>	<u>1340</u>		
508.namd_r	96	<u>164</u>	<u>558</u>	163	558			96	<u>164</u>	<u>558</u>	163	558		
510.parest_r	96	<u>348</u>	<u>721</u>	347	723			48	<u>162</u>	<u>775</u>	162	775		
511.povray_r	96	<u>282</u>	<u>795</u>	282	796			96	<u>282</u>	<u>795</u>	282	796		
519.lbm_r	96	171	591	<u>172</u>	<u>587</u>			48	<u>79.4</u>	<u>637</u>	76.4	662		
521.wrf_r	96	207	1040	<u>222</u>	<u>970</u>			96	207	1040	<u>222</u>	<u>970</u>		
526.blender_r	96	178	819	<u>179</u>	<u>815</u>			96	<u>178</u>	<u>820</u>	178	821		
527.cam4_r	96	190	884	<u>190</u>	<u>884</u>			96	188	892	<u>189</u>	<u>886</u>		
538.imagick_r	96	80.1	2980	<u>80.3</u>	<u>2970</u>			96	<u>79.9</u>	<u>2990</u>	79.9	2990		
544.nab_r	96	<u>130</u>	<u>1250</u>	129	1250			96	<u>123</u>	<u>1310</u>	123	1310		
549.fotonik3d_r	96	<u>546</u>	<u>685</u>	546	685			48	264	709	<u>264</u>	<u>709</u>		
554.roms_r	96	253	604	<u>253</u>	<u>603</u>			48	124	617	<u>124</u>	<u>614</u>		

SPECrate®2017_fp_base = 1010

SPECrate®2017_fp_peak = 1030

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/amd_rate_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Virtualization Technology : Disabled
NUMA Nodes Per Socket : 4

System Profile : Custom
C-States : Disabled
Memory Patrol Scrub : Disabled
PCI ASPM L1 Link Power Management : Disabled
Periodic Directory Rinse Tuning : Blended
Determinism Control : Manual
Determinism Slider : Power Determinism
Optimizer Mode : Enabled
Adaptive Allocation : Enabled
Dram Refresh Delay : Performance
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 1234567-R6725 Sun Apr 27 21:49:15 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

SPECrate®2017_fp_peak = 1030

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Platform Notes (Continued)

```
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----

1. uname -a
Linux 1234567-R6725 6.8.0-58-generic #60-Ubuntu SMP PREEMPT_DYNAMIC Fri Mar 14 18:29:48 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux
-----

2. w
 21:49:15 up  2:41,  1 user,  load average: 68.06, 89.49, 93.23
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root  tty1      -             19:10    2:36m  1.71s  0.57s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
-----

3. Username
From environment variable $USER: root
-----

4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3092809
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----

5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-VERS=6.2 --output_format html,pdf,txt
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-VERS=6.2 --output_format html,pdf,txt fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Platform Notes (Continued)

```
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-VERS=6.2 --output_format html,pdf,txt --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9255 24-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00211e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 24
siblings        : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0:   core ids 0-5,8-13,16-21,24-29
physical id 1:   core ids 0-5,8-13,16-21,24-29
physical id 0:   apicids 0-11,16-27,32-43,48-59
physical id 1:   apicids 64-75,80-91,96-107,112-123
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:    0-95
Vendor ID:              AuthenticAMD
BIOS Vendor ID:         AMD
Model name:             AMD EPYC 9255 24-Core Processor
BIOS Model name:        AMD EPYC 9255 24-Core Processor
BIOS CPU family:        107
CPU family:             26
Model:                  2
Thread(s) per core:     2
Core(s) per socket:     24
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU(s) scaling MHz:     40%
CPU max MHz:            4315.6250
CPU min MHz:            1500.0000
BogoMIPS:               6391.54
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                        cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                        osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
```

CPU @ 3.2GHz

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Platform Notes (Continued)

perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
flush_l1d debug_swap

L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)

NUMA node(s): 8
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-5,48-53
node 0 size: 96037 MB
node 0 free: 94978 MB
node 1 cpus: 6-11,54-59
node 1 size: 96762 MB
node 1 free: 95659 MB
node 2 cpus: 12-17,60-65

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Platform Notes (Continued)

```
node 2 size: 96762 MB
node 2 free: 95955 MB
node 3 cpus: 18-23,66-71
node 3 size: 96703 MB
node 3 free: 92552 MB
node 4 cpus: 24-29,72-77
node 4 size: 96762 MB
node 4 free: 96108 MB
node 5 cpus: 30-35,78-83
node 5 size: 96762 MB
node 5 free: 96096 MB
node 6 cpus: 36-41,84-89
node 6 size: 96762 MB
node 6 free: 96119 MB
node 7 cpus: 42-47,90-95
node 7 size: 96728 MB
node 7 free: 96085 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10
```

```
-----
9. /proc/meminfo
MemTotal:          791841772 kB
```

```
-----
10. who -r
run-level 3 Apr 27 19:10 last=5
```

```
-----
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
Default Target Status
graphical degraded
```

```
-----
12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured
Legend: LOAD    -> Reflects whether the unit definition was properly loaded.
          ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
          SUB    -> The low-level unit activation state, values depend on unit type.
1 loaded units listed.
```

```
-----
13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon anacron apparmor apport avahi-daemon blk-availability bluetooth
cloud-config cloud-final cloud-init cloud-init-local console-setup cron cups cups-browsed
dmesg e2scrub_reap finalrd getty@ gnome-remote-desktop gpu-manager grub-common
grub-initrd-fallback kerneloops keyboard-setup lm-sensors lvm2-monitor multipathd
networkd-dispatcher nvidia-hibernate nvidia-resume nvidia-suspend
nvidia-suspend-then-hibernate open-iscsi open-vm-tools openvpn pollinate
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Platform Notes (Continued)

enabled-runtime disabled generated indirect masked

power-profiles-daemon rsyslog secureboot-db setvtrgb ssl-cert switcheroo-control sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth wpa_supplicant netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs brltty console-getty debug-shell iscsid nftables nvidia-powerd openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@ speech-dispatcher saned@ spice-vdagentd systemd-sysupdate systemd-sysupdate-reboot uuidd alsa-utils cryptdisks cryptdisks-early hwclock multipath-tools-boot pulseaudio-enable-autospawn saned screen-cleanup sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-6.8.0-58-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro

15. cpupower frequency-info
analyzing CPU 1:
current policy: frequency should be within 1.50 GHz and 3.20 GHz.
The governor "schedutil" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 3200MHz

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage
    defrag          [always] defer defer+madvise madvise never
    enabled         [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared        256
    max_ptes_swap          64
    pages_to_scan          4096
    scan_sleep_millisecs   10000
```

```
-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release Ubuntu 24.04 LTS
```

```
-----
20. Disk information
    SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3
    Filesystem      Type  Size  Used Avail Use% Mounted on
    tmpfs            tmpfs 70G   3.3G   67G   5% /mnt/ramdisk
```

```
-----
21. /sys/devices/virtual/dmi/id
    Vendor:      Dell Inc.
    Product:     PowerEdge R6725
    Product Family: PowerEdge
    Serial:      1234567
```

```
-----
22. dmidecode
    Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      24x 802C0000802C MTC20F2085S1RC64BD2 32 GB 2 rank 6400
```

```
-----
23. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:      Dell Inc.
    BIOS Version:     1.1.3
    BIOS Date:        02/25/2025
    BIOS Revision:    1.1
```

Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

526.blender_r: -funsigned-char -DSPEC_LP64

527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Wl, -mllvm -Wl, -extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Wl, -mllvm -Wl, -extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Peak Optimization Flags (Continued)

544.nab_r (continued):

-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

Peak Optimization Flags (Continued)

527.cam4_r (continued):

-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -flto

-fstruct-layout=7 -mllvm -unroll-threshold=50

-fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3 -zopt

-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1010

PowerEdge R6725 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_fp_peak = 1030

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2025

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-27 17:49:15-0400.

Report generated on 2025-06-17 18:17:18 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-17.