



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

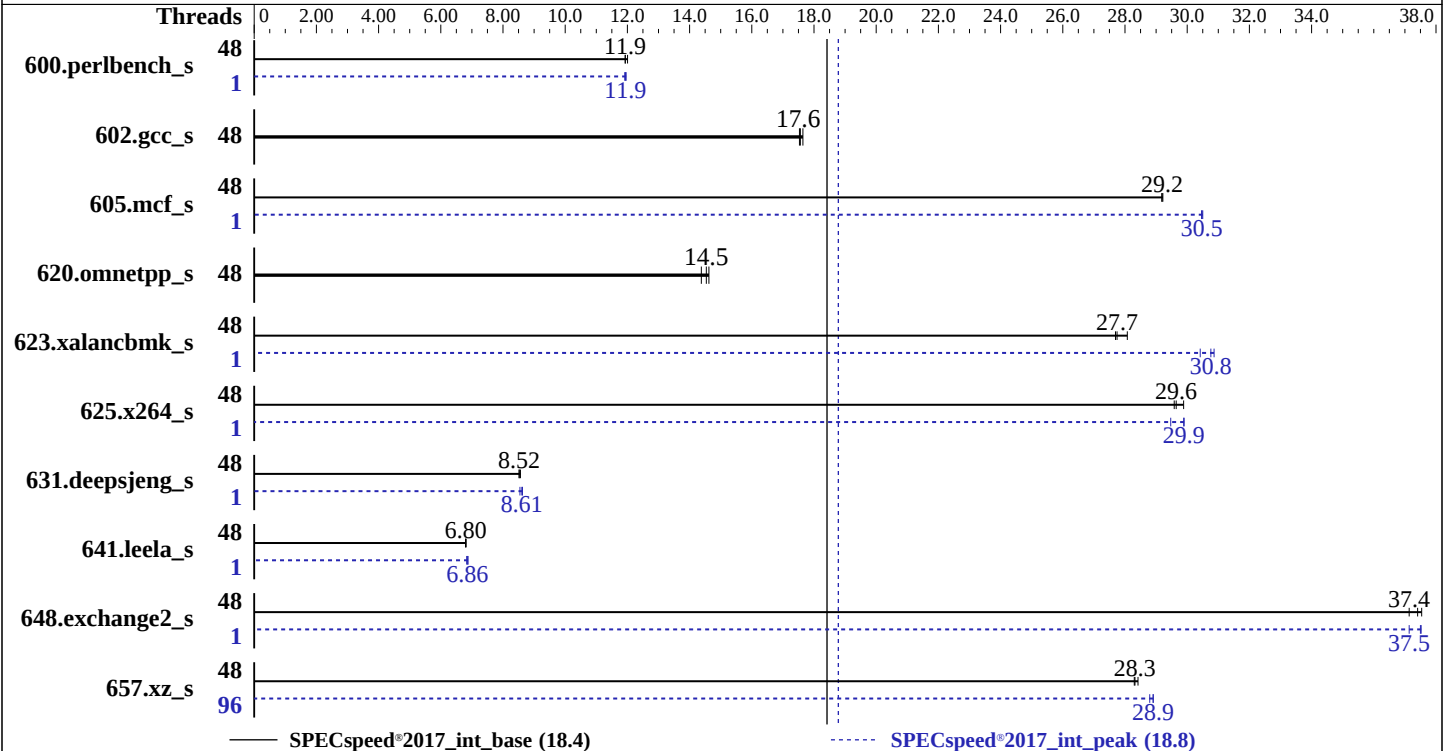

Hardware

CPU Name: AMD EPYC 9255
Max MHz: 4300
Nominal: 3200
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 3.84TB SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS
kernel version 6.8.0-41-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 7.30.10 released May-2025
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	148	12.0	149	11.9	149	11.9	1	148	12.0	149	11.9	149	11.9
602.gcc_s	48	226	17.6	227	17.6	227	17.5	48	226	17.6	227	17.6	227	17.5
605.mcf_s	48	162	29.2	162	29.2	162	29.2	1	155	30.5	155	30.5	155	30.5
620.omnetpp_s	48	112	14.6	112	14.5	113	14.4	48	112	14.6	112	14.5	113	14.4
623.xalancbmk_s	48	50.5	28.1	51.2	27.7	51.1	27.7	1	46.6	30.4	46.1	30.8	45.9	30.9
625.x264_s	48	59.6	29.6	59.0	29.9	59.5	29.6	1	59.0	29.9	59.0	29.9	59.9	29.5
631.deepsjeng_s	48	168	8.52	167	8.56	168	8.52	1	168	8.55	166	8.63	167	8.61
641.leela_s	48	251	6.80	250	6.81	251	6.80	1	248	6.88	249	6.86	250	6.83
648.exchange2_s	48	78.6	37.4	78.3	37.5	79.2	37.1	1	79.2	37.1	78.4	37.5	78.4	37.5
657.xz_s	48	218	28.3	218	28.3	218	28.4	96	214	28.9	214	28.9	215	28.8

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hupages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-95"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:/usr/local/amd/aocc-compiler-5.0.0/lib:/usr/local/amd/aocc-compiler-5.0.0/lib32:/usr/lib:/usr/local/mpc-131/lib:/usr/local/gmp-630/lib:/usr/local/mpfr-421/lib:/usr/local/isl-027/lib:/usr/local/gcc-1420/lib64:/usr/local/lib:/usr/lib"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "96"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-95"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

SMT Control set to Enabled

SVM Mode set to Disabled

Power Profile Selection set to High Performance Mode

Determinism Slider set to Power

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

cTDP set to 240
PPT set to 240
NUMA nodes per socket set to NPS 4

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on h3c Sun Aug 3 04:07:53 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
Linux h3c 6.8.0-41-generic #41-Ubuntu SMP PREEMPT_DYNAMIC Fri Aug 2 20:41:06 UTC 2024 x86_64 x86_64 x86_64 GNU/Linux
2. w
04:07:53 up 1 day, 8:13, 1 user, load average: 0.15, 0.03, 0.01
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - Fri19 7.00s 0.95s 0.19s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
3. Username
From environment variable \$USER: root
4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
memory(kbytes)      unlimited
locked memory(kbytes) 2097152
process             3093868
nofiles             1024
vmemory(kbytes)     unlimited
locks              unlimited
rtprio              0
```

```
-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeerd intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/temlogs/preenv.intspeerd.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9255 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002147
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 24
siblings       : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29
physical id 1: core ids 0-5,8-13,16-21,24-29
physical id 0: apicids 0-11,16-27,32-43,48-59
physical id 1: apicids 64-75,80-91,96-107,112-123
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            96
On-line CPU(s) list: 0-95
Vendor ID:         AuthenticAMD
BIOS Vendor ID:    Advanced Micro Devices, Inc.
Model name:        AMD EPYC 9255 24-Core Processor
BIOS Model name:   AMD EPYC 9255 24-Core Processor
BIOS CPU family:   107
CPU family:        26
Model:             2
Unknown CPU @ 3.2GHz
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 100%
CPU max MHz: 4315.0000
CPU min MHz: 1200.0000
BogoMIPS: 6385.25
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxt
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
------	----------	----------	------	------	-------	------	----------	----------------

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

L1d	48K	2.3M	12 Data	1	64	1	64
L1i	32K	1.5M	8 Instruction	1	64	1	64
L2	1M	48M	16 Unified	2	1024	1	64
L3	32M	256M	16 Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-5,48-53

node 0 size: 96299 MB

node 0 free: 96050 MB

node 1 cpus: 6-11,54-59

node 1 size: 96763 MB

node 1 free: 96576 MB

node 2 cpus: 12-17,60-65

node 2 size: 96763 MB

node 2 free: 96387 MB

node 3 cpus: 18-23,66-71

node 3 size: 96763 MB

node 3 free: 96526 MB

node 4 cpus: 24-29,72-77

node 4 size: 96763 MB

node 4 free: 96539 MB

node 5 cpus: 30-35,78-83

node 5 size: 96763 MB

node 5 free: 96458 MB

node 6 cpus: 36-41,84-89

node 6 size: 96720 MB

node 6 free: 96001 MB

node 7 cpus: 42-47,90-95

node 7 size: 96705 MB

node 7 free: 96490 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	22	22	22	22
1:	12	10	12	12	22	22	22	22
2:	12	12	10	12	22	22	22	22
3:	12	12	12	10	22	22	22	22
4:	22	22	22	22	10	12	12	12
5:	22	22	22	22	12	10	12	12
6:	22	22	22	22	12	12	10	12
7:	22	22	22	22	12	12	12	10

9. /proc/meminfo

MemTotal: 792109228 kB

10. who -r

run-level 3 Aug 1 19:56

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)

Default Target Status

multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
------	------	--------	-----	-------------

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

Legend: LOAD -> Reflects whether the unit definition was properly loaded.

ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.

SUB -> The low-level unit activation state, values depend on unit type.

1 loaded units listed.

13. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor
apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup
e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup
lvm2-monitor mariadb multipathd networkd-dispatcher open-iscsi pollinate secureboot-db
setvtrgb snapd systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald unattended-upgrades wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell ipmiev d iscsid mariadb@ rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
wpa_supplicant@
generated cpufrequtils loadcpufreq openipmi
indirect systemd-sysupdate systemd-sysupdate-reboot
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/vmlinuz-6.8.0-41-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
iommu=pt
amd_pstate=passive

15. cpupower frequency-info

analyzing CPU 7:

current policy: frequency should be within 1.20 GHz and 4.32 GHz.

The governor "performance" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

16. sysctl

kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvice madvice never
enabled     [always] madvice never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem                                Type  Size  Used Avail Use% Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv ext4  3.5T  154G  3.2T   5% /
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      New H3C Technologies Co., Ltd.
Product:     H3C UniServer R4950 G7
Product Family: Rack
Serial:      210235A55C0123456715
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  9x Samsung M321R4GA3EB2-CCPKC 32 GB 2 rank 6400
 15x Samsung M321R4GA3PB2-CCPKC 32 GB 2 rank 6400
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     7.30.10
BIOS Date:        05/24/2025
BIOS Revision:    5.35
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Firmware Revision: 2.2

Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
=====
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstallDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
=====
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)
=====
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstallDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
=====
Fortran | 648.exchange2_s(base, peak)
=====
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstallDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64

602.gcc_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Portability Flags (Continued)

605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9255

SPECspeed®2017_int_base = 18.4

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

-Wl, -mllvm -Wl, -lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V2.0-Turin.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V2.0-Turin.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-08-03 00:07:52-0400.

Report generated on 2025-08-26 17:50:11 by CPU2017 PDF formatter v6716.

Originally published on 2025-08-26.