



SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

xFusion


SPEChpc 2021_tny_base = 9.48

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021_tny_peak = 9.96

hpc2021 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Oct-2021

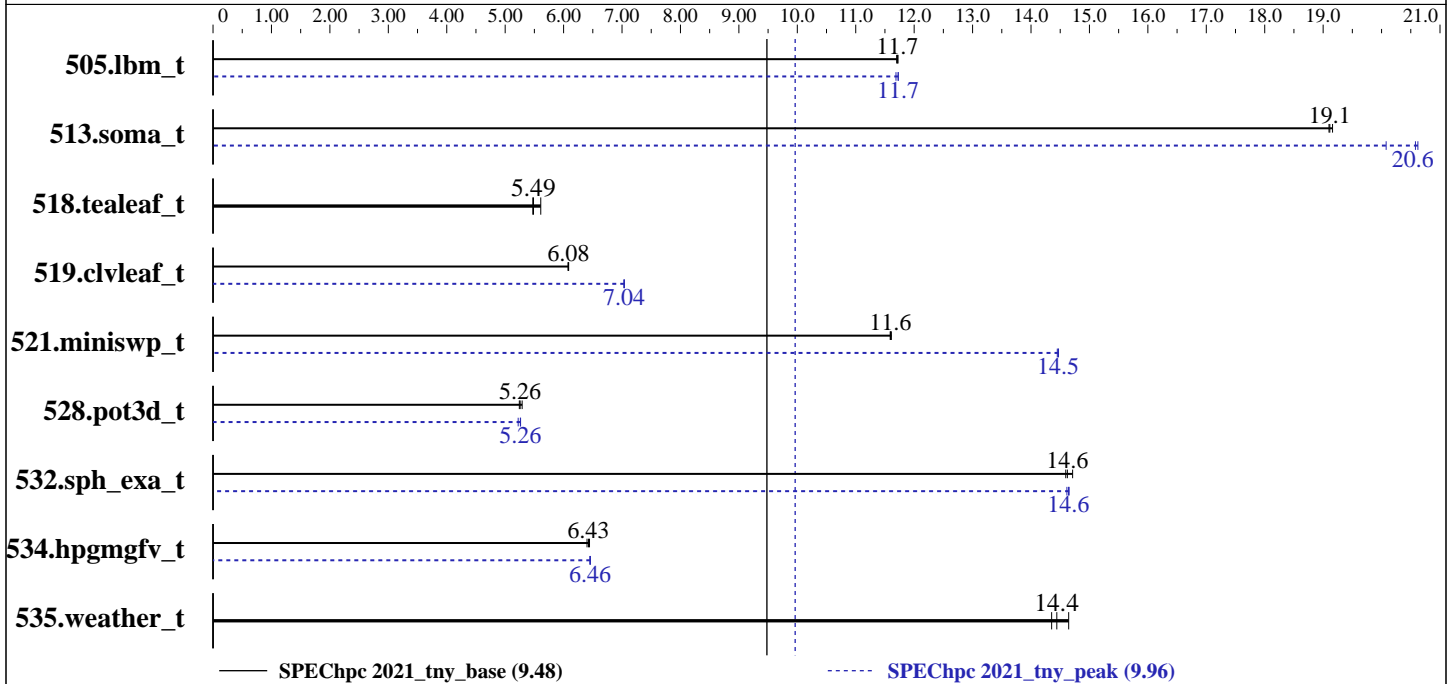

Results Table

Benchmark	Base								Peak									
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	OMP	32	10	192	11.7	192	11.7	192	11.7	OMP	4	80	192	11.7	192	11.7	192	11.7
513.soma_t	OMP	32	10	193	19.2	194	19.1	194	19.1	OMP	4	80	179	20.6	184	20.1	180	20.6
518.tealeaf_t	OMP	32	10	294	5.61	302	5.47	301	5.49	OMP	32	10	294	5.61	302	5.47	301	5.49
519.civleaf_t	OMP	32	10	271	6.08	272	6.07	271	6.09	OMP	16	20	234	7.04	235	7.03	234	7.04
521.miniswp_t	OMP	32	10	138	11.6	138	11.6	138	11.6	OMP	4	80	111	14.5	111	14.5	111	14.5
528.pot3d_t	OMP	32	10	402	5.29	405	5.24	404	5.26	OMP	32	10	404	5.26	404	5.26	407	5.22
532.sph_exa_t	OMP	32	10	134	14.6	133	14.6	133	14.7	OMP	32	10	133	14.6	133	14.6	133	14.7
534.hpgmgfv_t	OMP	32	10	184	6.40	182	6.44	183	6.43	OMP	32	10	182	6.45	182	6.46	182	6.46
535.weather_t	OMP	32	10	225	14.4	223	14.4	220	14.6	OMP	32	10	225	14.4	223	14.4	220	14.6

SPEChpc 2021_tny_base = 9.48

SPEChpc 2021_tny_peak = 9.96

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

xFusion

SPEChpc 2021_tny_base = 9.48

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021_tny_peak = 9.96

hpc2021 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Oct-2021

Hardware Summary

Type of System: Homogeneous Cluster
Compute Node: FusionServer 2288H V6
Interconnect: Mellanox HDR
Compute Nodes Used: 2
Total Chips: 4
Total Cores: 160
Total Threads: 320
Total Memory: 512 GB
Max. Peak Threads: 80

Software Summary

Compiler: Intel oneAPI Compiler 2021.4.0
MPI Library: Intel MPI Library for Linux* OS, Version 2021.4.0 Build 20210831
Other MPI Info: --
Other Software: --
Base Parallel Model: OMP
Base Ranks Run: 32
Base Threads Run: 10
Peak Parallel Models: OMP
Minimum Peak Ranks: 4
Maximum Peak Ranks: 32
Max. Peak Threads: 80
Min. Peak Threads: 10

Node Description: FusionServer 2288H V6

Hardware

Number of nodes: 2
Uses of the node: Compute
Vendor: xFusion
Model: FusionServer 2288H V6
CPU Name: Intel Xeon Platinum 8380
CPU(s) orderable: 1, 2 chips
Chips enabled: 2
Cores enabled: 80
Cores per chip: 40
Threads per core: 2
CPU Characteristics: Turbo Boost Technology up to 3.4 GHz
CPU MHz: 2300
Primary Cache: 32 KB I + 48 KB D on chip per core
Secondary Cache: 1.25 MB I+D on chip per core
L3 Cache: 60 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx8 PC4-3200R)
Disk Subsystem: 2 x 480 GB SATA 2.5" SSD (RAID 1)
Other Hardware: None
Accel Count: None
Accel Model: --
Accel Vendor: None
Accel Type: None
Accel Connection: None
Accel ECC enabled: None
Accel Description: None
Adapter: MCX653105A-EFAT
Number of Adapters: 1
Slot Type: PCI-Express 4.0 x16
Data Rate: 100 Gb/s
Ports Used: 1

Software

Accelerator Driver: --
Adapter: MCX653105A-EFAT
Adapter Driver: 5.4-3.1.0
Adapter Firmware: 20.32.1010
Operating System: CentOS Linux release 8.2.2004
4.18.0-193.el8.x86_644
Local File System: xfs
Shared File System: NFS
System State: Multi-user, run level 3
Other Software: None

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

xFusion

SPEChpc 2021_tny_base = 9.48

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021_tny_peak = 9.96

hpc2021 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Oct-2021

Node Description: FusionServer 2288H V6

Hardware (Continued)

Interconnect Type: Mellanox HDR

Interconnect Description: Mellanox HDR

Hardware

Vendor: Mellanox
Model: Mellanox HDR
Switch Model: Mellanox QM8790-HS2F
InfiniBand Switch
Number of Switches: 1
Number of Ports: 40
Data Rate: 200 Gbit/s
Firmware: --
Topology: Mesh
Primary Use: MPI Traffic

Software

: --

Submit Notes

The config file option 'submit' was used.
export LD_PRELOAD="/usr/lib64/libhugetlbfs.so \$LD_PRELOAD"
export OMP_PROC_BIND=true
mpirun.hydra -bootstrap ssh -hostfile \${top}/2node --bind-to core -np \$ranks -ppn \$ppn -genv OMP_NUM_THREADS=\$threads \$command

Compiler Version Notes

=====
CC 505.lbm_t(base, peak) 513.soma_t(base, peak) 518.tealeaf_t(base, peak)
521.miniswp_t(base, peak) 534.hpgmgfv_t(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler 2021.4.0 (2021.4.0.20210924)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/opt/compiler/oneapi/2021.4.0/compiler/2021.4.0/linux/bin

=====
CXXC 532.sph_exa_t(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler 2021.4.0 (2021.4.0.20210924)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/opt/compiler/oneapi/2021.4.0/compiler/2021.4.0/linux/bin

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

xFusion

SPEChpc 2021_tny_base = 9.48

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021_tny_peak = 9.96

hpc2021 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Oct-2021

Compiler Version Notes (Continued)

=====
FC 519.clvleaf_t(base, peak) 528.pot3d_t(base, peak) 535.weather_t(base, peak)
=====

ifx (IFORT) 2021.4.0 Beta 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

mpiicc -cc=icx -lstdc++(*)

C++ benchmarks:

mpiicpc -cxx=icx -lstdc++(*)

Fortran benchmarks:

mpiifort -fc=ifx -lstdc++(*)

(*) Indicates a compiler flag that was found in a non-compiler variable.

Base Portability Flags

513.soma_t: -DSPEC_NO_VAR_ARRAY_REDUCE

Base Optimization Flags

C benchmarks:

-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -fiopenmp
-ansi-alias

C++ benchmarks:

-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -fiopenmp
-ansi-alias

Fortran benchmarks:

-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -fiopenmp
-nostandard-realloc-lhs -align array64byte



SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

xFusion

SPEChpc 2021_tny_base = 9.48

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021_tny_peak = 9.96

hpc2021 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Oct-2021

Peak Compiler Invocation

C benchmarks:

```
mpiicc -cc=icx -lstdc++(*)
```

C++ benchmarks:

```
mpiicpc -cxx=icx -lstdc++(*)
```

Fortran benchmarks:

```
mpiifort -fc=ifx -lstdc++(*)
```

(*) Indicates a compiler flag that was found in a non-compiler variable.

Peak Portability Flags

```
513.soma_t: -DSPEC_NO_VAR_ARRAY_REDUCE
```

Peak Optimization Flags

C benchmarks:

```
505.lbm_t: -Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512  
-fiopenmp -ansi-alias
```

```
513.soma_t: Same as 505.lbm_t
```

```
518.tealeaf_t: basepeak = yes
```

```
521.miniswp_t: Same as 505.lbm_t
```

```
534.hpgmgfv_t: -Ofast -ipo -fiopenmp -ansi-alias
```

C++ benchmarks:

```
-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -ffast-math  
-fiopenmp -ansi-alias
```

Fortran benchmarks:

```
519.clvleaf_t: -Ofast -ipo -xCORE-AVX512  
-mllvm -hir-nontemporal-cacheline-count=0 -fiopenmp  
-nostandard-realloc-lhs -align array64byte
```

```
528.pot3d_t: -Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512  
-fiopenmp -nostandard-realloc-lhs -align array64byte
```

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

xFusion

SPEChpc 2021_tny_base = 9.48

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021_tny_peak = 9.96

hpc2021 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2022
Hardware Availability: Apr-2021
Software Availability: Oct-2021

Peak Optimization Flags (Continued)

535.weather_t: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/hpc2021/flags/Intel-oneAPI-icx2021-official-linux64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/hpc2021/flags/Intel-oneAPI-icx2021-official-linux64.xml>

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.0.3 on 2022-07-14 09:44:21-0400.
Report generated on 2022-08-24 18:40:38 by hpc2021 PDF formatter v1.0.3.
Originally published on 2022-08-24.