



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

## Intel


SPEChpc 2021\_sml\_base = 1.26

SPEChpc 2021\_sml\_peak = 1.28

Endeavour: Intel Server D50DNP1SBB (Xeon Max 9480)

hpc2021 License: 13  
Test Sponsor: Intel  
Tested by: Intel

Test Date: Apr-2024  
Hardware Availability: Jan-2023  
Software Availability: Mar-2024

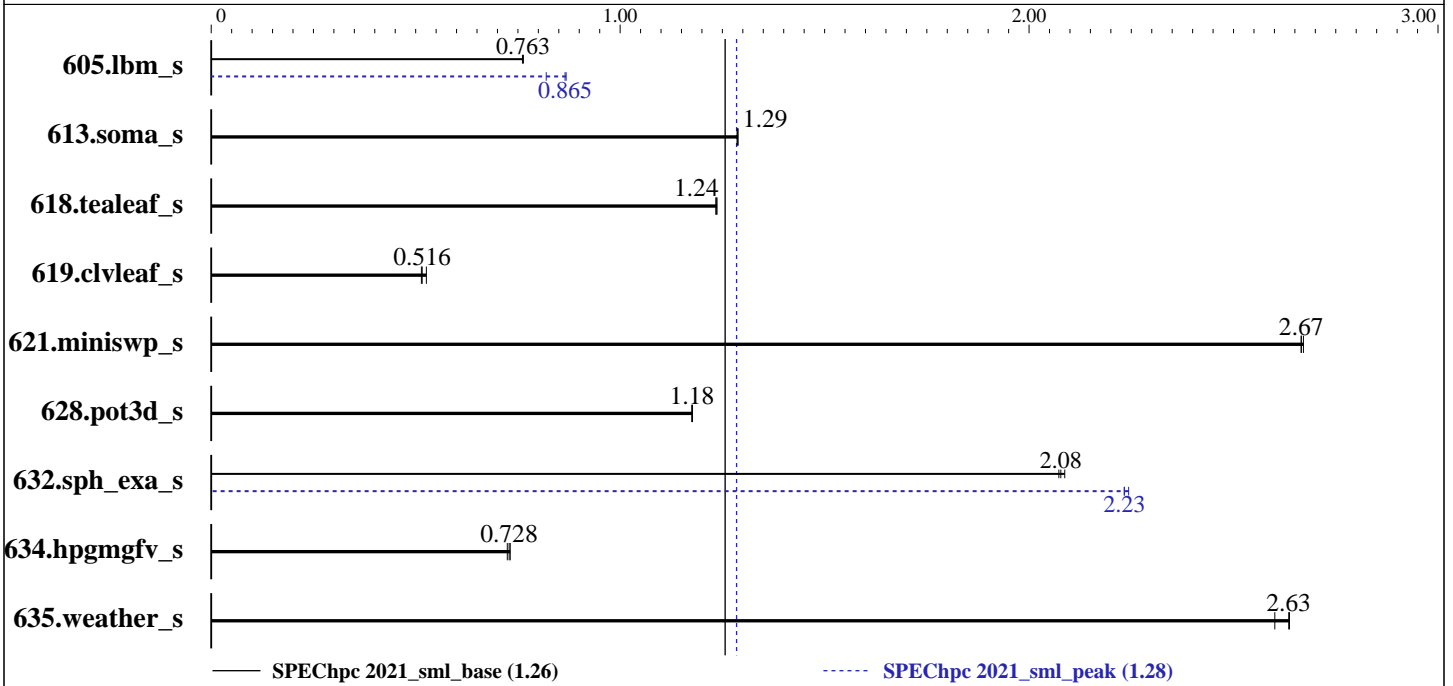

## Results Table

Benchmark	Base								Peak									
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
605.lbm_s	OMP	8	14	2032	0.763	2037	0.761	<b>2032</b>	<b>0.763</b>	OMP	16	7	<b>1791</b>	<b>0.865</b>	1892	0.819	1786	0.868
613.soma_s	OMP	8	14	1244	1.29	<b>1243</b>	<b>1.29</b>	1242	1.29	OMP	8	14	1244	1.29	<b>1243</b>	<b>1.29</b>	1242	1.29
618.tealeaf_s	OMP	8	14	1661	1.23	<b>1660</b>	<b>1.24</b>	1657	1.24	OMP	8	14	1661	1.23	<b>1660</b>	<b>1.24</b>	1657	1.24
619.civleaf_s	OMP	8	14	3210	0.514	<b>3198</b>	<b>0.516</b>	3136	0.526	OMP	8	14	3210	0.514	<b>3198</b>	<b>0.516</b>	3136	0.526
621.miniswp_s	OMP	8	14	413	2.67	<b>413</b>	<b>2.67</b>	412	2.67	OMP	8	14	413	2.67	<b>413</b>	<b>2.67</b>	412	2.67
628.pot3d_s	OMP	8	14	1425	1.18	1423	1.18	<b>1425</b>	<b>1.18</b>	OMP	8	14	1425	1.18	1423	1.18	<b>1425</b>	<b>1.18</b>
632.sph_exa_s	OMP	8	14	1110	2.07	1102	2.09	<b>1107</b>	<b>2.08</b>	OMP	16	7	<b>1030</b>	<b>2.23</b>	1025	2.24	1030	2.23
634.hpgmgfv_s	OMP	8	14	1347	0.724	1333	0.731	<b>1338</b>	<b>0.728</b>	OMP	8	14	1347	0.724	1333	0.731	<b>1338</b>	<b>0.728</b>
635.weather_s	OMP	8	14	<b>987</b>	<b>2.63</b>	986	2.64	1000	2.60	OMP	8	14	<b>987</b>	<b>2.63</b>	986	2.64	1000	2.60

SPEChpc 2021\_sml\_base = 1.26

SPEChpc 2021\_sml\_peak = 1.28

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

## Intel

SPEChpc 2021\_sml\_base = 1.26

Endeavour: Intel Server D50DNP1SBB (Xeon Max 9480)

SPEChpc 2021\_sml\_peak = 1.28

**hpc2021 License:** 13  
**Test Sponsor:** Intel  
**Tested by:** Intel

**Test Date:** Apr-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Mar-2024

### Hardware Summary

Type of System: Homogenous Cluster  
Compute Node: Intel Server D50DNP1SBB (Xeon Max 9480)  
Interconnect: Mellanox HDR  
Compute Nodes Used: 1  
Total Chips: 2  
Total Cores: 112  
Total Threads: 224  
Total Memory: 640 GB  
Max. Peak Threads: 14

### Software Summary

Compiler: Intel oneAPI Compiler 2024.1.0  
MPI Library: Intel MPI Library 2021.12 for Linux OS  
Other MPI Info: None  
Other Software: None  
Base Parallel Model: OMP  
Base Ranks Run: 8  
Base Threads Run: 14  
Peak Parallel Models: OMP  
Minimum Peak Ranks: 8  
Maximum Peak Ranks: 16  
Max. Peak Threads: 14  
Min. Peak Threads: 7

### Node Description: Intel Server D50DNP1SBB (Xeon Max 9480)

#### Hardware

Number of nodes: 1  
Uses of the node: Compute  
Vendor: Intel  
Model: Intel Server D50DNP1SBB (Xeon Max 9480)  
CPU Name: Intel Xeon Max 9480  
CPU(s) orderable: 1, 2 chips  
Chips enabled: 2  
Cores enabled: 112  
Cores per chip: 56  
Threads per core: 2  
CPU Characteristics: Turbo Boost Technology up to 3.5 GHz  
CPU MHz: 1900  
Primary Cache: 32 KB I + 48 KB D on chip per core  
Secondary Cache: 2 MB I+D on chip per core  
L3 Cache: 112.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 640 GB (16 x 32GB 2Rx8 PC5-4800B-R + 8 x 16GB HBM2 3200 MT/s)  
Disk Subsystem: 1 x 1 TB NVMe U.2 2.5" SSD  
Other Hardware: None  
Accel Count: None  
Accel Model: None  
Accel Vendor: None  
Accel Type: None  
Accel Connection: None  
Accel ECC enabled: None  
Accel Description: None  
Adapter: Mellanox ConnectX-6 HDR  
Number of Adapters: 1  
Slot Type: PCI-Express 4.0 x16  
Data Rate: 200Gbit/s  
Ports Used: 1

#### Software

Accelerator Driver: None  
Adapter: Mellanox ConnectX-6 HDR  
Adapter Driver: 23.04-0.5.3  
Adapter Firmware: 20.37.1014  
Operating System: Rocky Linux 8.8 (Green Obsidian) 4.18.0-477.15.1.el8\_8.x86\_64  
Local File System: xfs  
Shared File System: PANASAS FS  
System State: Run level 5  
Other Software: None

(Continued on next page)



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

## Intel

SPEChpc 2021\_sml\_base = 1.26

Endeavour: Intel Server D50DNP1SBB (Xeon Max 9480)

SPEChpc 2021\_sml\_peak = 1.28

**hpc2021 License:** 13  
**Test Sponsor:** Intel  
**Tested by:** Intel

**Test Date:** Apr-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Mar-2024

### Node Description: Intel Server D50DNP1SBB (Xeon Max 9480)

#### Hardware (Continued)

Interconnect Type: Mellanox HDR

### Interconnect Description: Mellanox HDR

#### Hardware

Vendor: Mellanox  
Model: Mellanox HDR  
Switch Model: Mellanox MQM8790-HS2F Quantum HDR InfiniBand Switch  
Number of Switches: 18  
Number of Ports: 40  
Data Rate: 200 Gbit/s  
Firmware: 20.36.1010  
Topology: Fat-tree  
Primary Use: MPI Traffic

#### Software

: --

### Submit Notes

The config file option 'submit' was used.

### General Notes

The PANASAS filesystem as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC HPG Policy document, <http://www.spec.org/hpg/policy.html>

HBM is configured as HBM cache mode.

### Compiler Version Notes

=====  
CXXC 632.sph\_exa\_s(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler 2024.1.0 (2024.1.0.20240308)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir:  
/global/panfs05/admin5/opt/intel/oneAPI/2024.1.0/compiler/2024.1/bin/compiler  
Configuration file:  
/global/panfs05/admin5/opt/intel/oneAPI/2024.1.0/compiler/2024.1/bin/compiler/./icpx.cfg

(Continued on next page)



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

## Intel

SPEChpc 2021\_sml\_base = 1.26

Endeavour: Intel Server D50DNP1SBB (Xeon Max 9480)

SPEChpc 2021\_sml\_peak = 1.28

**hpc2021 License:** 13  
**Test Sponsor:** Intel  
**Tested by:** Intel

**Test Date:** Apr-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Mar-2024

## Compiler Version Notes (Continued)

=====  
CC 605.lbm\_s(base, peak) 613.soma\_s(base, peak) 618.tealeaf\_s(base, peak)  
621.miniswp\_s(base, peak) 634.hpgmgfv\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler 2024.1.0 (2024.1.0.20240308)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir:  
/global/panfs05/admin5/opt/intel/oneAPI/2024.1.0/compiler/2024.1/bin/compiler  
Configuration file:  
/global/panfs05/admin5/opt/intel/oneAPI/2024.1.0/compiler/2024.1/bin/compiler/./icx.cfg  
=====

=====  
FC 619.clvleaf\_s(base, peak) 628.pot3d\_s(base, peak) 635.weather\_s(base,  
peak)  
=====

ifx (IFX) 2024.1.0 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:  
mpiicc -cc=icx

C++ benchmarks:  
mpiicpc -cxx=icpx

Fortran benchmarks:  
mpiifort -fc=ifx

## Base Portability Flags

605.lbm\_s: -lstdc++ -std=c++14  
613.soma\_s: -lstdc++ -std=c++14  
618.tealeaf\_s: -lstdc++ -std=c++14  
621.miniswp\_s: -lstdc++ -std=c++14  
634.hpgmgfv\_s: -lstdc++ -std=c++14



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Intel

SPEChpc 2021\_sml\_base = 1.26

Endeavour: Intel Server D50DNP1SBB (Xeon Max 9480)

SPEChpc 2021\_sml\_peak = 1.28

**hpc2021 License:** 13  
**Test Sponsor:** Intel  
**Tested by:** Intel

**Test Date:** Apr-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Mar-2024

## Base Optimization Flags

C benchmarks:

```
-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512  
-qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto  
-funroll-loops
```

C++ benchmarks:

```
-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512  
-qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto  
-funroll-loops
```

Fortran benchmarks:

```
-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512  
-qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto  
-funroll-loops -nostandard-realloc-lhs -align array64byte
```

## Base Other Flags

C benchmarks:

```
-Wno-incompatible-function-pointer-types
```

## Peak Compiler Invocation

C benchmarks:

```
mpiicc -cc=icx
```

C++ benchmarks:

```
mpiicpc -cxx=icpx
```

Fortran benchmarks:

```
mpiifort -fc=ifx
```

## Peak Portability Flags

```
605.lbm_s: -lstdc++ -std=c++14  
613.soma_s: -lstdc++ -std=c++14  
618.tealeaf_s: -lstdc++ -std=c++14  
621.miniswp_s: -lstdc++ -std=c++14  
634.hpgmgfv_s: -lstdc++ -std=c++14
```



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Intel

SPEChpc 2021\_sml\_base = 1.26

Endeavour: Intel Server D50DNP1SBB (Xeon Max 9480)

SPEChpc 2021\_sml\_peak = 1.28

**hpc2021 License:** 13  
**Test Sponsor:** Intel  
**Tested by:** Intel

**Test Date:** Apr-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Mar-2024

## Peak Optimization Flags

C benchmarks:

```
605.lbm_s: -O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512  
-qopt-multiple-gather-scatter-by-shuffles -fiopenmp  
-ffast-math -flto -funroll-loops
```

613.soma\_s: basepeak = yes

618.tealeaf\_s: basepeak = yes

621.miniswp\_s: basepeak = yes

634.hpgmgfv\_s: basepeak = yes

C++ benchmarks:

```
-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512  
-qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto  
-funroll-loops
```

Fortran benchmarks:

619.clvleaf\_s: basepeak = yes

628.pot3d\_s: basepeak = yes

635.weather\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-incompatible-function-pointer-types
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/hpc2021/flags/HBM.html>

[http://www.spec.org/hpc2021/flags/Intel\\_compiler\\_flags.2024-12-11.html](http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2024-12-11.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/hpc2021/flags/HBM.xml>

[http://www.spec.org/hpc2021/flags/Intel\\_compiler\\_flags.2024-12-11.xml](http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2024-12-11.xml)



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

## Intel

SPEChpc 2021\_sml\_base = 1.26

Endeavour: Intel Server D50DNP1SBB (Xeon Max 9480)

SPEChpc 2021\_sml\_peak = 1.28

**hpc2021 License:** 13  
**Test Sponsor:** Intel  
**Tested by:** Intel

**Test Date:** Apr-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Mar-2024

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEChpc2021 v1.1.8 on 2024-04-10 04:49:55-0400.  
Report generated on 2024-12-31 10:30:21 by hpc2021 PDF formatter v1.0.3.  
Originally published on 2024-12-25.