SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Series 700 Model 715/100

SPECint95 = 2.89

SPECint_base95 = 2.89

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: May-94	Software Avail: Aug-95

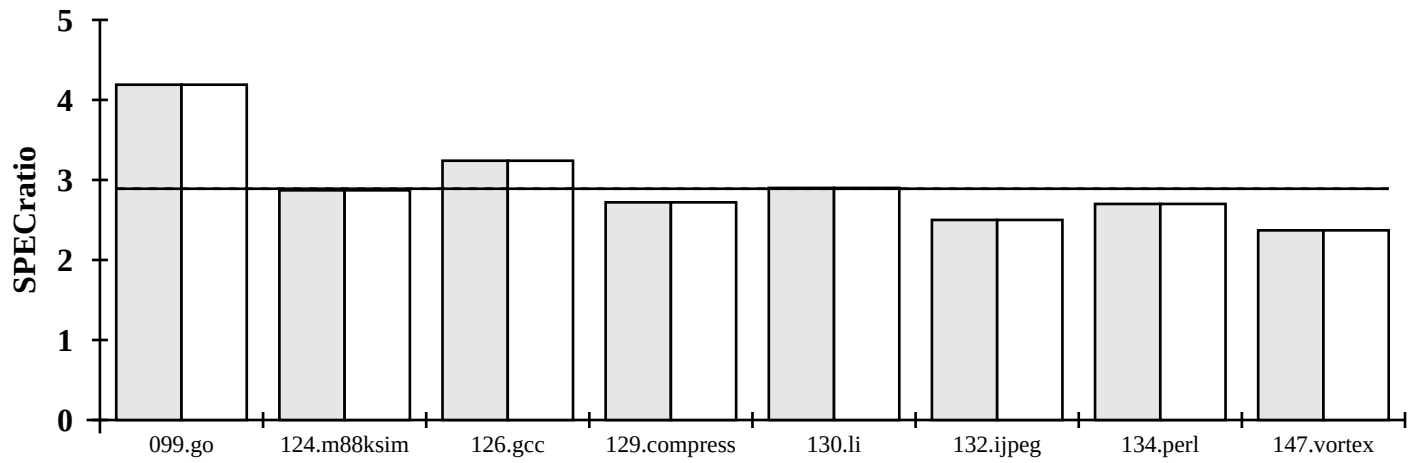

Hardware/Software Configuration for:
HP 9000 Series 700 Model 715/100

Hardware

Model Name:	HP 9000 Series 700 Model 715/100
CPU:	100MHz PA-RISC 7100LC
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	256KB(I+D) off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	64MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.01
Compiler:	HP92453-01 A.10.13 HP C Compiler
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	1097	4.19	1097	4.19
124.m88ksim	1900	662	2.87	662	2.87
126.gcc	1700	525	3.24	525	3.24
129.compress	1800	661	2.72	661	2.72
130.li	1900	654	2.90	654	2.90
132.ijpeg	2400	958	2.50	958	2.50
134.perl	1900	703	2.70	703	2.70
147.vortex	2700	1140	2.37	1140	2.37
SPECint_base95 (G. Mean)			2.89		
		SPECint95 (G. Mean)			2.89

Notes/Tuning Information

```
Portability:  126.gcc: -DUSG
Linker Flags:  -Wl,-aarchive
Baseline Flags:  +P +Oall +Onoregionsched
+P indicates feedback directed optimization was used.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org