SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model J200

SPECint95 = 3.64

SPECint_base95 = 3.64

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Aug-95	Software Avail: Aug-95

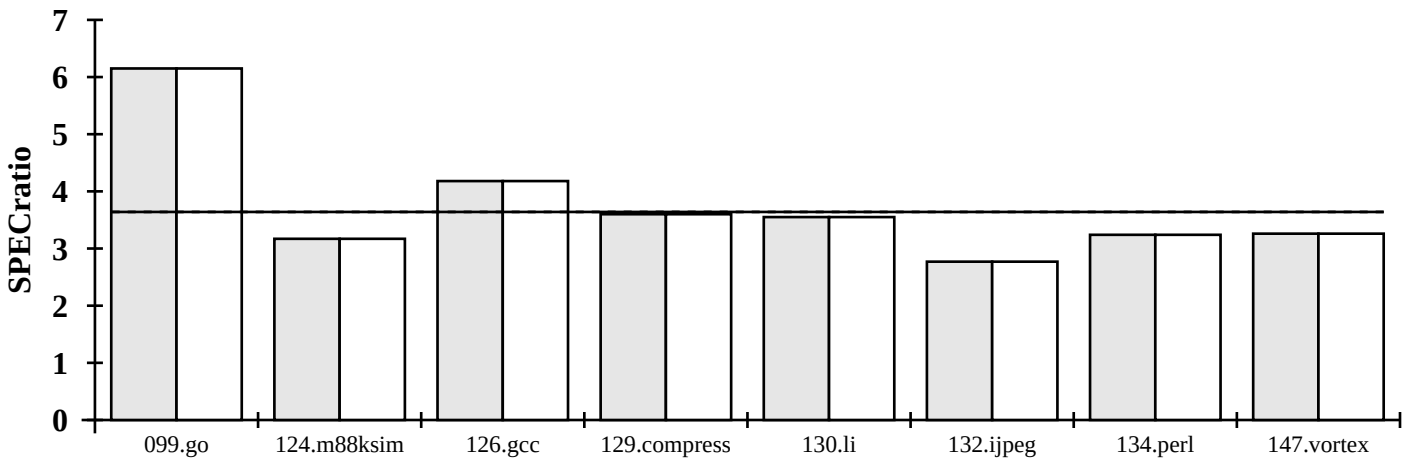

Hardware/Software Configuration for:
HP 9000 Model J200

Hardware

Model Name:	J200
CPU:	100 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	256KBI+256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	256MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.01
Compiler:	HP92453-01 A.10.13 HP C Compiler
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	748	6.15	748	6.15
124.m88ksim	1900	599	3.17	599	3.17
126.gcc	1700	407	4.18	407	4.18
129.compress	1800	500	3.60	500	3.60
130.li	1900	535	3.55	535	3.55
132.ijpeg	2400	867	2.77	867	2.77
134.perl	1900	587	3.24	587	3.24
147.vortex	2700	828	3.26	828	3.26
SPECint_base95 (G. Mean)			3.64		
		SPECint95 (G. Mean)			3.64

Notes/Tuning Information

```
Portability:  126.gcc: -DUSG
Linker Flags:  -Wl,-aarchive
Baseline Flags:  +P +Oall +Onoregionsched
+P indicates feedback directed optimization was used.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org