SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Sun Microsystems
SPARCstation 20 Model 71

SPECint95 = --

SPECint_base95 = 2.46

SPEC license # 6 | Tested By: Sun MountainView,CA | Test Date: Jul-95 | Hardware Avail: Jan-95 | Software Avail: Sep-94

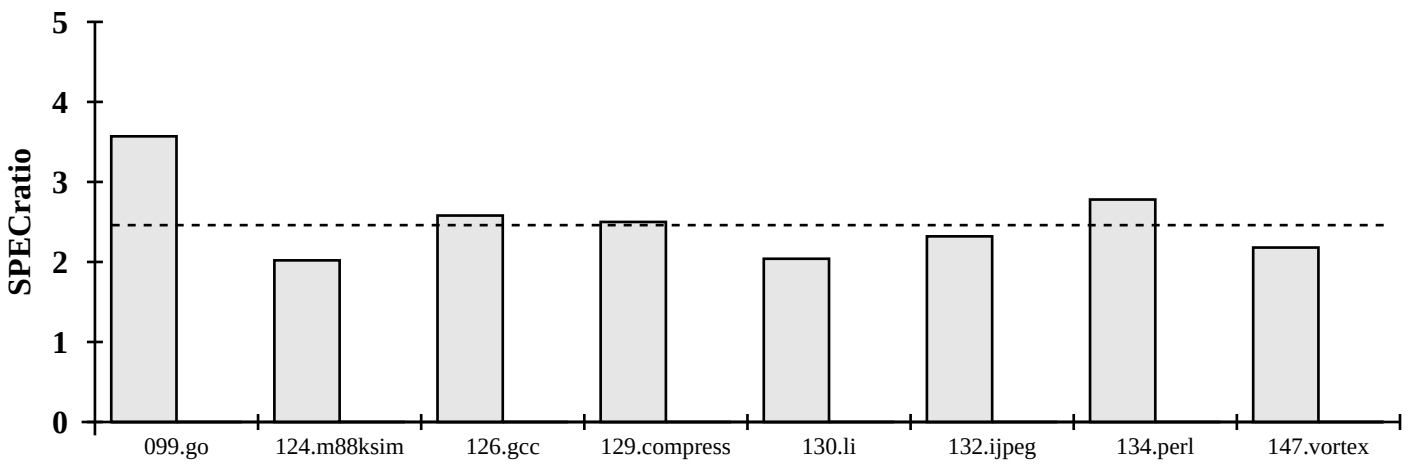

Hardware/Software Configuration for:
SPARCstation 20 Model 71

Hardware

Model Name:	SPARCstation 20 Model 71
CPU:	75MHz SuperSPARC II
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	20KBI+16KBD on chip
Secondary Cache:	1MB(I+D) off chip
Other Cache:	None
Memory:	64MB
Disk Subsystem:	424MB SCSI (O/S), 1GB SCSI
Other Hardware:	Ethernet

Software

Operating System:	Solaris 2.4
Compiler:	Sun 3.0.1
Other Software:	None
File System:	UFS
System State:	Multi-User

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	1287	3.57	--	--
124.m88ksim	1900	940	2.02	--	--
126.gcc	1700	659	2.58	--	--
129.compress	1800	721	2.50	--	--
130.li	1900	932	2.04	--	--
132.ijpeg	2400	1034	2.32	--	--
134.perl	1900	684	2.78	--	--
147.vortex	2700	1239	2.18	--	--
SPECint_base95 (G. Mean)			2.46		
		SPECint95 (G. Mean)			--

Notes/Tuning Information

```
All benchmarks used -fast -xO4
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org