SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model C100

SPECint95 = 3.67

SPECint_base95 = 3.67

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Nov-95	Software Avail: Jun-95

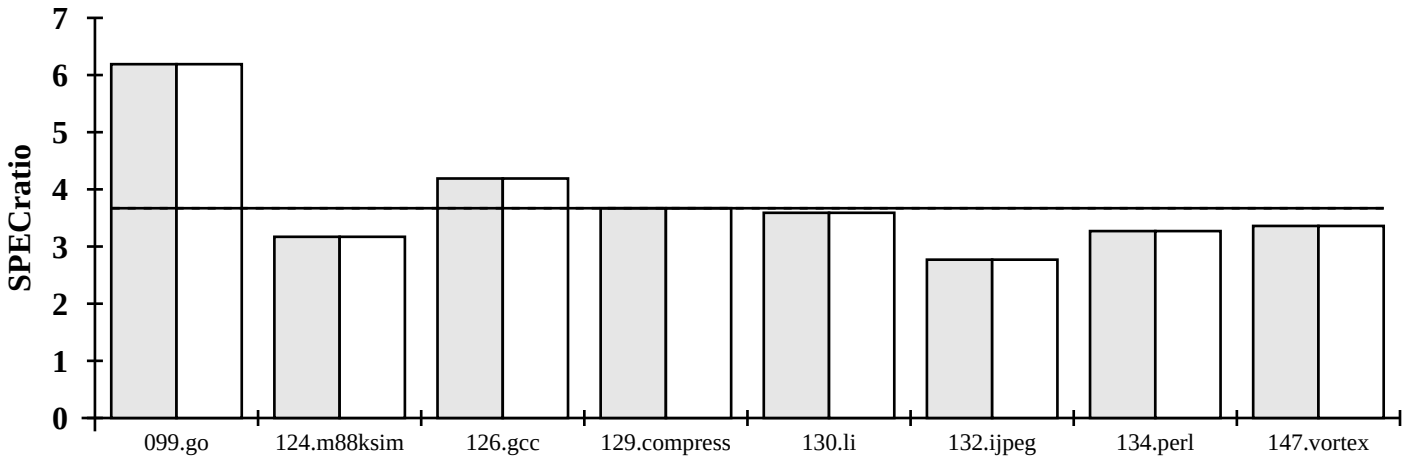

Hardware/Software Configuration for:
HP 9000 Model C100

Hardware

Model Name:	HP 9000 Model C100
CPU:	100 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	256KBI+256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	256MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.01
Compiler:	HP92453-01 A.10.13 HP C Compiler
File System:	HP-UX
System State:	Multi-user
Kernel Extensions:	Increased: maxdsiz, maxssiz

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	743	6.19	743	6.19
124.m88ksim	1900	600	3.17	600	3.17
126.gcc	1700	405	4.19	405	4.19
129.compress	1800	490	3.67	490	3.67
130.li	1900	530	3.59	530	3.59
132.ijpeg	2400	867	2.77	867	2.77
134.perl	1900	581	3.27	581	3.27
147.vortex	2700	803	3.36	803	3.36
SPECint_base95 (G. Mean)			3.67		
		SPECint95 (G. Mean)			3.67

Notes/Tuning Information

```
PORTABILITY:
All: -Ae
126.gcc: -Ae -DUSG

BASE FLAGS:
All: +Oall +Onoregionsched +P -Wl,-aarchive

PEAK FLAGS:
Same as BASE.

Note: The +P indicates the use of profile based optimizatio
```