SPEC CFP95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model K410

SPECfp95 = 7.40

SPECfp_base95 = 7.40

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Oct-95	Hardware Avail: Jan-96	Software Avail: Aug-95

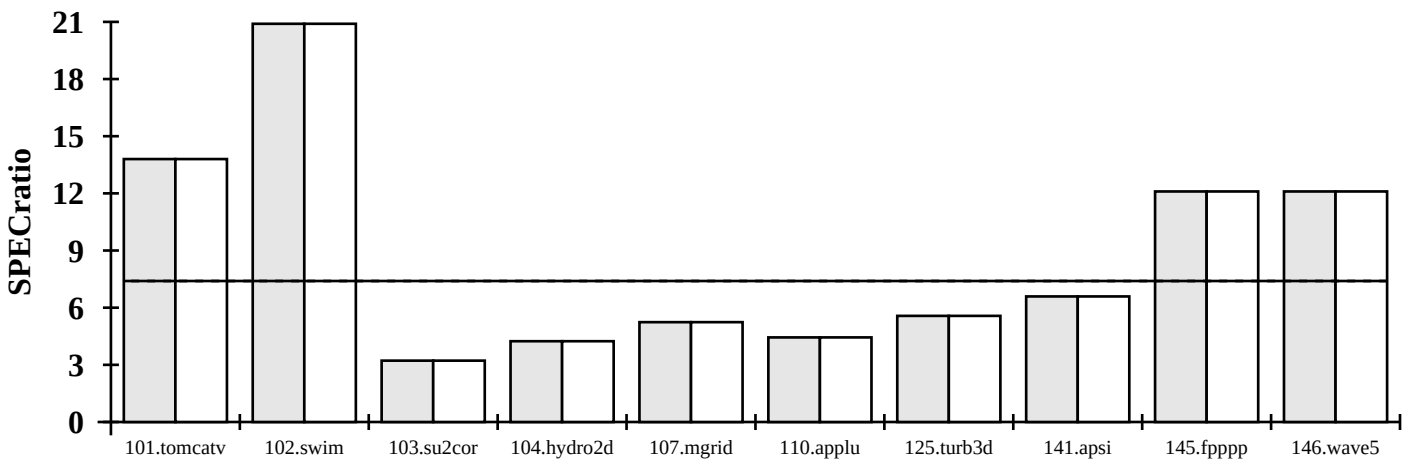

Hardware/Software Configuration for:
HP 9000 Model K410

Hardware

Model Name:	HP 9000 Model K410
CPU:	120 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	256KBI+256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	512MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.01
Compiler:	FORTRAN B3906AA B.10.00.01.00
File System:	HP-UX
System State:	Multi-user
Kernel Extensions:	Increased: maxdsiz, maxssiz

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
101.tomcatv	3700	269	13.8	269	13.8
102.swim	8600	411	20.9	411	20.9
103.su2cor	1400	435	3.22	435	3.22
104.hydro2d	2400	566	4.24	566	4.24
107.mgrid	2500	477	5.24	477	5.24
110.applu	2200	496	4.44	496	4.44
125.turb3d	4100	737	5.57	737	5.57
141.apsi	2100	319	6.59	319	6.59
145.fpppp	9600	796	12.1	796	12.1
146.wave5	3000	247	12.1	247	12.1
SPECfp_base95 (G. Mean)			7.40		
		SPECfp95 (G. Mean)			7.40

Notes/Tuning Information

```
BASE:
All: +Oall +Onofastaccess +DAK400 -Wl,-a,archive

PEAK:
Same as BASE.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org