SPEC CFP95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model C110

SPECfp_rate95 = 67.1

SPECfp_rate_base95 = 67.1

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Nov-95	Software Avail: Jun-95

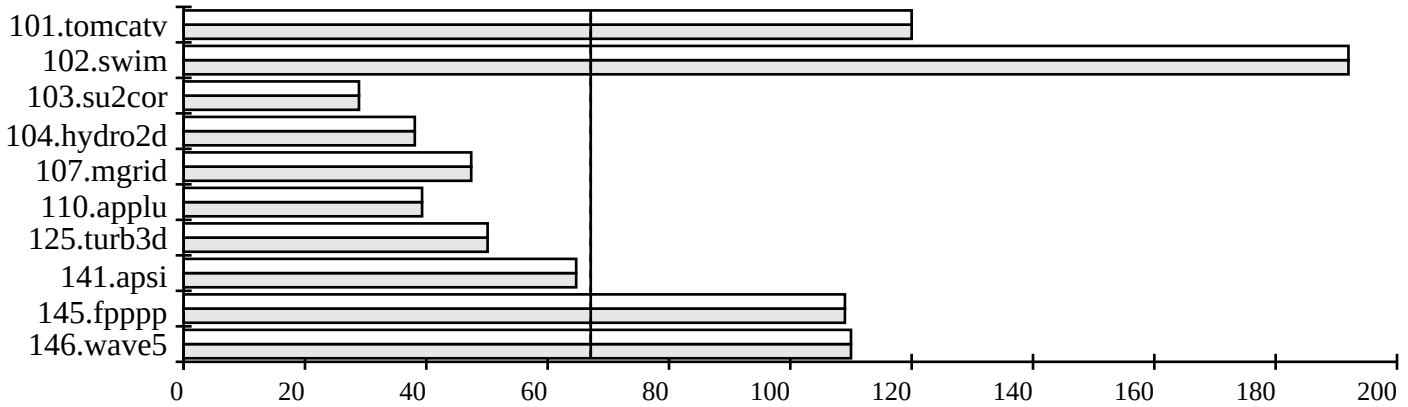

Hardware/Software Configuration for:
HP 9000 Model C110

Hardware

Model Name:	HP 9000 Model C110
CPU:	120 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	256KBI+256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	256MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.01
Compiler:	FORTRAN B3906AA B.10.00.01.00
File System:	HP-UX
System State:	Multi-user
Kernel Extensions:	Increased: maxdsiz, maxssiz

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
101.tomcatv	1	277	120	1	277	120
102.swim	1	402	192	1	402	192
103.su2cor	1	437	28.9	1	437	28.9
104.hydro2d	1	567	38.1	1	567	38.1
107.mgrid	1	475	47.4	1	475	47.4
110.applu	1	504	39.3	1	504	39.3
125.turb3d	1	737	50.1	1	737	50.1
141.apsi	1	292	64.7	1	292	64.7
145.fpppp	1	793	109	1	793	109
146.wave5	1	245	110	1	245	110
SPECfp_rate_base95 (G. Mean)			67.1			
SPECfp_rate95 (G. Mean)						67.1

Notes/Tuning Information

```
Base Flags:
All:  +Oall +Onofastaccess
Linker Flags:  -Wl,-a,archive

Peak Flags:
Same as Base Flags unless otherwise noted.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org